


## Halvlangledet kæde - grade 50 / Short link chain grade 50

Leveres ubehandlet som standard.  
Kan også leveres varmgalvaniseret.

Available as untreated chain.  
Hot dip galvanized on request.



Art. No. Blank	Breaking load kp	d mm	e mm	h mm	Max. payload kp	Weight kg/m
03-4021008	5.500	8	52	16	1.375	1,10
03-4021009	7.000	9	54	16	1.750	1,45
03-4021010	8.500	10	50	14	2.125	1,80
03-4021013	13.500	13	65	18	3.375	3,05
03-4021016	21.000	16	80	22	5.250	4,60
03-4021020	31.000	20	70	27	7.750	8,20
03-4021023	43.500	23	80	31	10.875	10,8


Anvendelse: Ankerkæde, afspærring, almene ikke-løfteopgaver. Ej til løft.

Use: Anchorchain, barrier, common non-lifting assignments. Not for lifting.

## Langeddet kæde - grade 50 / Long link chain grade 50

Leveres ubehandlet som standard.  
Kan også leveres varmgalvaniseret.

Available as untreated chain.  
Hot dip galvanized on request.



Art. No. Blank	Breaking load kp	d mm	e mm	h mm	Max. payload kp	Weight kg/m
03-4022016	21.000	16	100	32	5.250	4,4
03-4022020	31.000	20	125	35	7.750	7,0
03-4022022	42.000	22	120	28	10.500	8,3
03-4022025	54.000	25	140	32	13.500	11
03-4022028	68.000	28	150	37	17.000	14
03-4022032	88.000	32	170	44	22.000	19
03-4022035	106.000	35	180	47	26.500	22
03-4022040	138.000	40	200	54	34.500	29


Anvendelse: Ankerkæde, afspærring, almene ikke-løfteopgaver. Ej til løft.

Use: Anchorchain, barrier, common non-lifting assignments. Not for lifting.

## Langeddet kæde - DIN 5685-C / Long link chain - DIN 5685-C

Leveres ubehandlet/varmgalvaniseret som standard.  
Kan også leveres elgalvaniseret.  
Brudlast er ca. angivelse.

Available as untreated and hot dip galvanized.  
Available as electro galvanized on request.  
Breaking loads are estimated ratings.



Art. No. Blank	Art. No. Galv.	Breaking load kg	d mm	e mm	h mm	Number of links	Weight kg/100 m
03-40110025	03-40120025	200	2,5	24	5	41,7	9,0
03-40110030	03-40120030	280	3,0	26	6	38,5	14,6
03-40110035	03-40120035	385	3,5	28	7	35,7	19,0
03-40110040	03-40120040	500	4,0	32	8	31,3	25,0
03-40110045	03-40120045	630	4,5	34	9	29,4	32,2
03-40110050	03-40120050	775	5,0	35	10	28,6	40,7
03-40110060	03-40120060	1.150	6,0	42	12	23,8	59
03-40110070	03-40120070	1.500	7,0	49	14	20,4	80
03-40110080	03-40120080	2.000	8,0	52	16	19,2	108


Anvendelse: Armaturophæng, udstillingsformål etc.  
Ej til løft.

Use: Lighting fittings, exhibition designs etc.  
Not for lifting.

## Kortleddet kæde - DIN 766-A / Short link chain - DIN 766-A

Leveres i varmgalv. som standard.  
Kan også leveres ubehandlet.  
Ikke kalibreret. Grade 30.  
Brudlast er ca. angivelse.

Available as hot dip galvanized.  
Also available as untreated on request.  
Not calibrated. Grade 30.  
Breaking loads are estimated ratings.

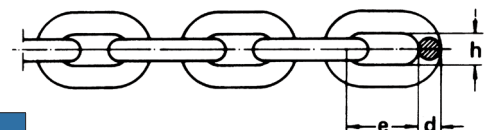

Art. No. Galv.	Breaking load kg	d mm	e mm	h mm	Weight kg/m
03-40160040	600	4	16	6	0,32
03-40160050	1.260	5	18,5	7	0,50
03-40160060	1.800	6	18,5	8	0,75
03-40160070	2.520	7	22	9	1,00
03-40160080	3.200	8	24	10	1,35
03-40160100	5.000	10	28	14	2,25
03-40160120	7.000	12	36	16	3,10
03-40160160	12.600	16	45	22	5,80
03-40160200	20.000	20	56	27	9,00

Anvendelse: Ankerkæde, afspærring, tyverisikring, almene ikke-løfteopgaver.  
Ej til løft.

Use: Anchorchain, barrier, insurance against burglary, common non-lifting assignments.  
Not for lifting.

## Karabinhage efter DIN 5299C / Snap hook after DIN 5299C

Art. No.	Thickness	Length	Opening
02-9014004	4	40	6
02-9014005	5	50	7
02-9014006	6	60	8
02-9014007	7	70	9
02-9014008	8	80	11
02-9014009	9	90	11
02-9014010	10	100	12
02-9014011	11	120	17
02-9014012	12	140	21



Ikke godkendt til løft.

Not approved for lifting. Galvaniseret / Galvanized

Specifications and products are subject to change / Der tages forbehold for trykfejl og udgåede varer