



## Vaks type 2500

### Fordele:

- Let sammenkobling af modulerne.
- Mulighed for sammenkobling medfører, at modulerne kan genanvendes til mindre og større opgaver alt efter behov.
- Ved transport over ujævne flader vil ujævnheden udlignes grundet sammenkoblingen.

Leveres i karton á 2 stk.  
Pris er pr. par (= 2 stk.)

### Advantages:

- Easy to couple the modules.
- The possibility of coupling will imply that the modules can be reused for smaller or bigger projects, as required.
- By transport over uneven surfaces, the unevenness will be equalized due to the coupling.

Delivery in carton of 2 pieces.  
Price is per pair (= 2 pcs.)




Art. No.	04-810701
Wheel	2 Nylon rollers on 2 axles
Capacity	2,5 T*
Dimension	210 x 115 x 100 mm
Weight per pc.	4,2 kg

\* Bæreevnen forøges ved sammenkobling - d.v.s. 2 stk. MODUL VAKS 2500 = 5 T bæreevne.

\* The carrying capacity can be increased by coupling - it means 2 pcs. MODUL VAKS 2500 = 5 T carrying capacity.


## Vaks type 1000R4

Art. No.	04-810400
Wheel	4 pivotal nylon wheels
Capacity	1 T
Dimension	450 x 340 x 120 mm
Weight	15 kg



## Vaks type 3000

Art. No.	04-810600
Wheel	12 Nylon wheels on 2 axles
Capacity	3 T
Dimension	330 x 300 x 115 mm
Weight	10 kg

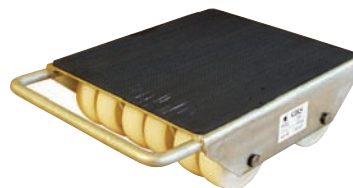

## Vaks type 3000R

Art. No.	04-811030
Wheel	4 Nylon rollers on 2 axles- turnable plate
Capacity	3 T
Dimension	200 x 160 x 100 mm
Weight	13 kg


Med trækstang.

With steering bar.




## Vaks type 6000

Art. No.	04-812060
Wheel	6 Nylon rollers on 3 axles
Capacity	6 T
Dimension	260 x 230 x 100 mm
Weight	13 kg

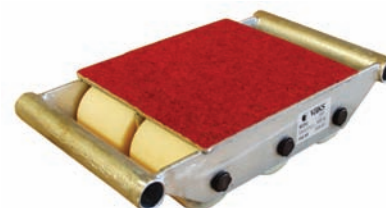

## Vaks type 12000

Art. No.	04-812120
Wheel	6 Steel rollers on 3 axles
Capacity	12 T
Dimension	260 x 230 x 100 mm
Weight	27 kg

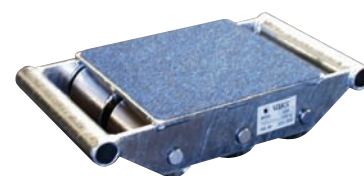

## Vaks type 6000R

Art. No.	04-811060
Wheel	8 Nylon wheels on 2 axles (parallel turning)
Capacity	6 T
Dimension	400 x 250 x 115 mm
Weight	53 kg

Med trækstang.

With steering bar.

## Vaks type 12000R

Art. No.	04-811120
Wheel	8 Steel rollers on 2 axles (parallel turning)
Capacity	12 T
Dimension	400 x 250 x 115 mm
Weight	59 kg

Med trækstang.

With steering bar.



## Løftestang / Lifting bar

Til flytning af maskiner og udstyr.  
 Metalhjul, olierede for lang levetid.  
 Løftestangen kan anvendes til løft og flytning.  
 CE mærket.

For moving machines and equipment.  
 Duration oiled metal wheels.  
 The rod can be used for lifting and moving.  
 CE marked.

Art. No.	04-810900
Wheel	2 Metal
Capacity	1,5 T
Rod length	1530 mm
Lifting height	max. 200 mm
Weight	11 kg



## VAKS donkraft / Jack

Art. No.	04-820300	04-820800
Charging	3 T	8 T
Lifting foot height	15 mm	22 mm
Lifting foot length x width	55 x 70/50	55 x 70/50
Highest lifting height top plate	380 mm	395 mm
Highest lifting height lifting foot	240 mm	270 mm
Lifting	130 mm	150 mm
Height	250 mm	250 mm
Width	250 mm	270 mm
Weight	21/29 kg	25/33 kg

04-820300 - Standard 3 T  
 04-820350 - Med sep. pumpe 3 T  
 04-820800 - Standard 8 T  
 04-820850 - Med sep. pumpe 8 T

04-820300 - Standard 3 T  
 04-820350 - With sep. pump 3 T  
 04-820800 - Standard 8 T  
 04-820850 - With sep. pump 8 T



Specifications and products are subject to change / Der tages forbehold for trykfejl og udgåede varer