


## Rustfri stålwire PYTHON/INOX 18x7/19x7

### Produkt information

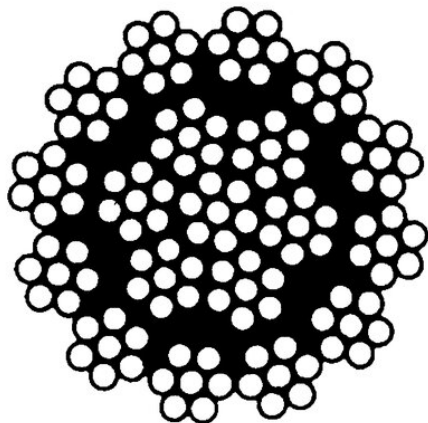

**Wirekonstruktion:** Stålwire i 18x7 AISI 316.  
**Materiale:** 1570 N/mm<sup>2</sup> (160 kp/mm<sup>2</sup>)

**Fyldfaktor:** 0.55  
**Tolerance Ø:** 0% til +4%

## Rustfri stålwire PYTHON/INOX 18x7/19x7

### Tekniske data

Varenummer	Wire diameter mm	Brudstyrke N/mm <sup>2</sup>	Overflade	Wireslåning	Minimum brudstyrke kN	Stål areal (mm <sup>2</sup> )	Smøring	Vægt kg/100m
108100304620229	3	1.570	Rustfri	sZ	5,9	-	-	3,6
108100303620229	3	1.570	Rustfri	zS	5,9	-	-	3,6
108100654620229	6,5	1.570	Rustfri	sZ	22,27	-	-	16,4
108100653620229	6,5	1.570	Rustfri	zS	22,27	-	-	16,4
108100704620229	7	1.570	Rustfri	sZ	27	-	-	19,7
108100703620229	7	1.570	Rustfri	zS	27	-	-	19,7
108101204620229	12	1.570	Rustfri	sZ	77,63	-	-	57,9