


## Steel wire rope Diepa PZ299

### Product information

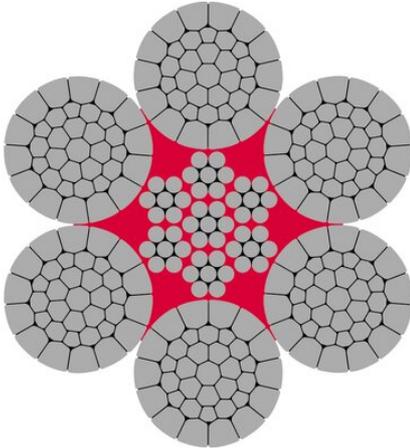

Diepa PZ299 is a non-rotation resistant wire rope with compacted outer strands and plastic insert.

**Applications:** Universal use for single and multiple layer coiling on the drum.

**Lay:** Ordinary lay with internal plastic component.

**ISO 4309 Rope Category No:** 4-6mm **RCN.01**, 7-60mm **RCN.09**

... [Read more](#)

**Marking:** According to standard

**Finish:** Galvanized or bright.

**Standard:** EN 12385-4

**Warning:** Not to be used with a swivel.

**Fill factor:** 0.6526

**RCN:** 01

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103100404250249	4	1,770	Galvanized	sZ	12.2	-	SupplierStandard	7
103100403250249	4	1,770	Galvanized	zS	12.2	-	SupplierStandard	7
103100404050249	4	1,770	Bright	sZ	12.2	-	SupplierStandard	7
103100403050249	4	1,770	Bright	zS	12.2	-	SupplierStandard	7
103100404270249	4	1,960	Galvanized	sZ	13.5	-	SupplierStandard	7
103100403270249	4	1,960	Galvanized	zS	13.5	-	SupplierStandard	7
103100404070249	4	1,960	Bright	sZ	13.5	-	SupplierStandard	7
103100403070249	4	1,960	Bright	zS	13.5	-	SupplierStandard	7
103100404300249	4	2,160	Galvanized	sZ	14.7	-	SupplierStandard	7
103100403300249	4	2,160	Galvanized	zS	14.7	-	SupplierStandard	7
103100404100249	4	2,160	Bright	sZ	14.7	-	SupplierStandard	7
103100403100249	4	2,160	Bright	zS	14.7	-	SupplierStandard	7
103100504250249	5	1,770	Galvanized	sZ	19.1	-	SupplierStandard	11
103100503250249	5	1,770	Galvanized	zS	19.1	-	SupplierStandard	11
103100504050249	5	1,770	Bright	sZ	19.1	-	SupplierStandard	11
103100503050249	5	1,770	Bright	zS	19.1	-	SupplierStandard	11
103100504270249	5	1,960	Galvanized	sZ	21.1	-	SupplierStandard	11
103100503270249	5	1,960	Galvanized	zS	21.1	-	SupplierStandard	11
103100504070249	5	1,960	Bright	sZ	21.1	-	SupplierStandard	11
103100503070249	5	1,960	Bright	zS	21.1	-	SupplierStandard	11
103100504300249	5	2,160	Galvanized	sZ	22.9	-	SupplierStandard	11
103100503300249	5	2,160	Galvanized	zS	22.9	-	SupplierStandard	11
103100504100249	5	2,160	Bright	sZ	22.9	-	SupplierStandard	11
103100503100249	5	2,160	Bright	zS	22.9	-	SupplierStandard	11
103100604250249	6	1,770	Galvanized	sZ	27.5	-	SupplierStandard	16
103100603250249	6	1,770	Galvanized	zS	27.5	-	SupplierStandard	16
103100604050249	6	1,770	Bright	sZ	27.5	-	SupplierStandard	16
103100603050249	6	1,770	Bright	zS	27.5	-	SupplierStandard	16
103100604270249	6	1,960	Galvanized	sZ	30.5	-	SupplierStandard	16
103100603270249	6	1,960	Galvanized	zS	30.5	-	SupplierStandard	16
103100604070249	6	1,960	Bright	sZ	30.5	-	SupplierStandard	16

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103100603070249	6	1,960	Bright	zS	30.5	-	SupplierStandard	16
103100604300249	6	2,160	Galvanized	sZ	33.2	-	SupplierStandard	16
103100603300249	6	2,160	Galvanized	zS	33.2	-	SupplierStandard	16
103100604100249	6	2,160	Bright	sZ	33.2	-	SupplierStandard	16
103100603100249	6	2,160	Bright	zS	33.2	-	SupplierStandard	16
103100654250249	6.5	1,770	Galvanized	sZ	32.2	-	SupplierStandard	19
103100653250249	6.5	1,770	Galvanized	zS	32.2	-	SupplierStandard	19
103100654050249	6.5	1,770	Bright	sZ	32.2	-	SupplierStandard	19
103100653050249	6.5	1,770	Bright	zS	32.2	-	SupplierStandard	19
103100654270249	6.5	1,960	Galvanized	sZ	35.7	-	SupplierStandard	19
103100653270249	6.5	1,960	Galvanized	zS	35.7	-	SupplierStandard	19
103100654070249	6.5	1,960	Bright	sZ	35.7	-	SupplierStandard	19
103100653070249	6.5	1,960	Bright	zS	35.7	-	SupplierStandard	19
103100654300249	6.5	2,160	Galvanized	sZ	38.8	-	SupplierStandard	19
103100653300249	6.5	2,160	Galvanized	zS	38.8	-	SupplierStandard	19
103100654100249	6.5	2,160	Bright	sZ	38.8	-	SupplierStandard	19
103100653100249	6.5	2,160	Bright	zS	38.8	-	SupplierStandard	19
103100704250249	7	1,770	Galvanized	sZ	37.3	-	SupplierStandard	22
103100703250249	7	1,770	Galvanized	zS	37.3	-	SupplierStandard	22
103100704050249	7	1,770	Bright	sZ	37.3	-	SupplierStandard	22
103100703050249	7	1,770	Bright	zS	37.3	-	SupplierStandard	22
103100704270249	7	1,960	Galvanized	sZ	41.3	-	SupplierStandard	22
103100703270249	7	1,960	Galvanized	zS	41.3	-	SupplierStandard	22
103100704070249	7	1,960	Bright	sZ	41.3	-	SupplierStandard	22
103100703070249	7	1,960	Bright	zS	41.3	-	SupplierStandard	22
103100704300249	7	2,160	Galvanized	sZ	45	-	SupplierStandard	22
103100703300249	7	2,160	Galvanized	zS	45	-	SupplierStandard	22
103100704100249	7	2,160	Bright	sZ	45	-	SupplierStandard	22
103100703100249	7	2,160	Bright	zS	45	-	SupplierStandard	22
103100754250249	7.5	1,770	Galvanized	sZ	42.9	-	SupplierStandard	26
103100753250249	7.5	1,770	Galvanized	zS	42.9	-	SupplierStandard	26

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103100754050249	7.5	1,770	Bright	sZ	42.9	-	SupplierStandard	26
103100753050249	7.5	1,770	Bright	zS	42.9	-	SupplierStandard	26
103100754270249	7.5	1,960	Galvanized	sZ	47.5	-	SupplierStandard	26
103100753270249	7.5	1,960	Galvanized	zS	47.5	-	SupplierStandard	26
103100754070249	7.5	1,960	Bright	sZ	47.5	-	SupplierStandard	26
103100753070249	7.5	1,960	Bright	zS	47.5	-	SupplierStandard	26
103100754300249	7.5	2,160	Galvanized	sZ	51.7	-	SupplierStandard	26
103100753300249	7.5	2,160	Galvanized	zS	51.7	-	SupplierStandard	26
103100754100249	7.5	2,160	Bright	sZ	51.7	-	SupplierStandard	26
103100753100249	7.5	2,160	Bright	zS	51.7	-	SupplierStandard	26
103100804250249	8	1,770	Galvanized	sZ	48.8	-	SupplierStandard	29
103100803250249	8	1,770	Galvanized	zS	48.8	-	SupplierStandard	29
103100804050249	8	1,770	Bright	sZ	48.8	-	SupplierStandard	29
103100803050249	8	1,770	Bright	zS	48.8	-	SupplierStandard	29
103100804270249	8	1,960	Galvanized	sZ	54	-	SupplierStandard	29
103100803270249	8	1,960	Galvanized	zS	54	-	SupplierStandard	29
103100804070249	8	1,960	Bright	sZ	54	-	SupplierStandard	29
103100803070249	8	1,960	Bright	zS	54	-	SupplierStandard	29
103100804300249	8	2,160	Galvanized	sZ	58.8	-	SupplierStandard	29
103100803300249	8	2,160	Galvanized	zS	58.8	-	SupplierStandard	29
103100804100249	8	2,160	Bright	sZ	58.8	-	SupplierStandard	29
103100803100249	8	2,160	Bright	zS	58.8	-	SupplierStandard	29
103100854250249	8.5	1,770	Galvanized	sZ	55.1	-	SupplierStandard	33
103100853250249	8.5	1,770	Galvanized	zS	55.1	-	SupplierStandard	33
103100854050249	8.5	1,770	Bright	sZ	55.1	-	SupplierStandard	33
103100853050249	8.5	1,770	Bright	zS	55.1	-	SupplierStandard	33
103100854270249	8.5	1,960	Galvanized	sZ	61	-	SupplierStandard	33
103100853270249	8.5	1,960	Galvanized	zS	61	-	SupplierStandard	33
103100854070249	8.5	1,960	Bright	sZ	61	-	SupplierStandard	33
103100853070249	8.5	1,960	Bright	zS	61	-	SupplierStandard	33
103100854300249	8.5	2,160	Galvanized	sZ	66.4	-	SupplierStandard	33

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103100853300249	8.5	2,160	Galvanized	zS	66.4	-	SupplierStandard	33
103100854100249	8.5	2,160	Bright	sZ	66.4	-	SupplierStandard	33
103100853100249	8.5	2,160	Bright	zS	66.4	-	SupplierStandard	33
103100904250249	9	1,770	Galvanized	sZ	61.7	-	SupplierStandard	37
103100903250249	9	1,770	Galvanized	zS	61.7	-	SupplierStandard	37
103100904050249	9	1,770	Bright	sZ	61.7	-	SupplierStandard	37
103100903050249	9	1,770	Bright	zS	61.7	-	SupplierStandard	37
103100904270249	9	1,960	Galvanized	sZ	68.3	-	SupplierStandard	37
103100903270249	9	1,960	Galvanized	zS	68.3	-	SupplierStandard	37
103100904070249	9	1,960	Bright	sZ	68.3	-	SupplierStandard	37
103100903070249	9	1,960	Bright	zS	68.3	-	SupplierStandard	37
103100904300249	9	2,160	Galvanized	sZ	74.4	-	SupplierStandard	37
103100903300249	9	2,160	Galvanized	zS	74.4	-	SupplierStandard	37
103100904100249	9	2,160	Bright	sZ	74.4	-	SupplierStandard	37
103100903100249	9	2,160	Bright	zS	74.4	-	SupplierStandard	37
103100954250249	9.5	1,770	Galvanized	sZ	68.8	-	SupplierStandard	41
103100953250249	9.5	1,770	Galvanized	zS	68.8	-	SupplierStandard	41
103100954050249	9.5	1,770	Bright	sZ	68.8	-	SupplierStandard	41
103100953050249	9.5	1,770	Bright	zS	68.8	-	SupplierStandard	41
103100954270249	9.5	1,960	Galvanized	sZ	76.2	-	SupplierStandard	41
103100953270249	9.5	1,960	Galvanized	zS	76.2	-	SupplierStandard	41
103100954070249	9.5	1,960	Bright	sZ	76.2	-	SupplierStandard	41
103100953070249	9.5	1,960	Bright	zS	76.2	-	SupplierStandard	41
103100954300249	9.5	2,160	Galvanized	sZ	82.9	-	SupplierStandard	41
103100953300249	9.5	2,160	Galvanized	zS	82.9	-	SupplierStandard	41
103100954100249	9.5	2,160	Bright	sZ	82.9	-	SupplierStandard	41
103100953100249	9.5	2,160	Bright	zS	82.9	-	SupplierStandard	41
103101004250249	10	1,770	Galvanized	sZ	76.2	-	SupplierStandard	46
103101003250249	10	1,770	Galvanized	zS	76.2	-	SupplierStandard	46
103101004050249	10	1,770	Bright	sZ	76.2	-	SupplierStandard	46
103101003050249	10	1,770	Bright	zS	76.2	-	SupplierStandard	46

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103101004270249	10	1,960	Galvanized	sZ	84	-	SupplierStandard	46
103101003270249	10	1,960	Galvanized	zS	84	-	SupplierStandard	46
103101004070249	10	1,960	Bright	sZ	84	-	SupplierStandard	46
103101003070249	10	1,960	Bright	zS	84	-	SupplierStandard	46
103101004300249	10	2,160	Galvanized	sZ	92.1	-	SupplierStandard	46
103101003300249	10	2,160	Galvanized	zS	92.1	-	SupplierStandard	46
103101004100249	10	2,160	Bright	sZ	92.1	-	SupplierStandard	46
103101003100249	10	2,160	Bright	zS	92.1	-	SupplierStandard	46
103101104250249	11	1,770	Galvanized	sZ	92.4	-	SupplierStandard	55
103101103250249	11	1,770	Galvanized	zS	92.4	-	SupplierStandard	55
103101104050249	11	1,770	Bright	sZ	92.4	-	SupplierStandard	55
103101103050249	11	1,770	Bright	zS	92.4	-	SupplierStandard	55
103101104270249	11	1,960	Galvanized	sZ	102	-	SupplierStandard	55
103101103270249	11	1,960	Galvanized	zS	102	-	SupplierStandard	55
103101104070249	11	1,960	Bright	sZ	102	-	SupplierStandard	55
103101103070249	11	1,960	Bright	zS	102	-	SupplierStandard	55
103101104300249	11	2,160	Galvanized	sZ	111	-	SupplierStandard	55
103101103300249	11	2,160	Galvanized	zS	111	-	SupplierStandard	55
103101104100249	11	2,160	Bright	sZ	111	-	SupplierStandard	55
103101103100249	11	2,160	Bright	zS	111	-	SupplierStandard	55
103101204250249	12	1,770	Galvanized	sZ	110	-	SupplierStandard	66
103101203250249	12	1,770	Galvanized	zS	110	-	SupplierStandard	66
103101204050249	12	1,770	Bright	sZ	110	-	SupplierStandard	66
103101203050249	12	1,770	Bright	zS	110	-	SupplierStandard	66
103101204270249	12	1,960	Galvanized	sZ	122	-	SupplierStandard	66
103101203270249	12	1,960	Galvanized	zS	122	-	SupplierStandard	66
103101204070249	12	1,960	Bright	sZ	122	-	SupplierStandard	66
103101203070249	12	1,960	Bright	zS	122	-	SupplierStandard	66
103101204300249	12	2,160	Galvanized	sZ	132	-	SupplierStandard	66
103101203300249	12	2,160	Galvanized	zS	132	-	SupplierStandard	66
103101204100249	12	2,160	Bright	sZ	132	-	SupplierStandard	66

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103101203100249	12	2,160	Bright	zS	132	-	SupplierStandard	66
103101304250249	13	1,770	Galvanized	sZ	129	-	SupplierStandard	77
103101303250249	13	1,770	Galvanized	zS	129	-	SupplierStandard	77
103101304050249	13	1,770	Bright	sZ	129	-	SupplierStandard	77
103101303050249	13	1,770	Bright	zS	129	-	SupplierStandard	77
103101304270249	13	1,960	Galvanized	sZ	143	-	SupplierStandard	77
103101303270249	13	1,960	Galvanized	zS	143	-	SupplierStandard	77
103101304070249	13	1,960	Bright	sZ	143	-	SupplierStandard	77
103101303070249	13	1,960	Bright	zS	143	-	SupplierStandard	77
103101304300249	13	2,160	Galvanized	sZ	155	-	SupplierStandard	77
103101303300249	13	2,160	Galvanized	zS	155	-	SupplierStandard	77
103101304100249	13	2,160	Bright	sZ	155	-	SupplierStandard	77
103101303100249	13	2,160	Bright	zS	155	-	SupplierStandard	77
103101404250249	14	1,770	Galvanized	sZ	150	-	SupplierStandard	89
103101403250249	14	1,770	Galvanized	zS	150	-	SupplierStandard	89
103101404050249	14	1,770	Bright	sZ	150	-	SupplierStandard	89
103101403050249	14	1,770	Bright	zS	150	-	SupplierStandard	89
103101404270249	14	1,960	Galvanized	sZ	165	-	SupplierStandard	89
103101403270249	14	1,960	Galvanized	zS	165	-	SupplierStandard	89
103101404070249	14	1,960	Bright	sZ	165	-	SupplierStandard	89
103101403070249	14	1,960	Bright	zS	165	-	SupplierStandard	89
103101404300249	14	2,160	Galvanized	sZ	180	-	SupplierStandard	89
103101403300249	14	2,160	Galvanized	zS	180	-	SupplierStandard	89
103101404100249	14	2,160	Bright	sZ	180	-	SupplierStandard	89
103101403100249	14	2,160	Bright	zS	180	-	SupplierStandard	89
103101504250249	15	1,770	Galvanized	sZ	171	-	SupplierStandard	103
103101503250249	15	1,770	Galvanized	zS	171	-	SupplierStandard	103
103101504050249	15	1,770	Bright	sZ	171	-	SupplierStandard	103
103101503050249	15	1,770	Bright	zS	171	-	SupplierStandard	103
103101504270249	15	1,960	Galvanized	sZ	190	-	SupplierStandard	103
103101503270249	15	1,960	Galvanized	zS	190	-	SupplierStandard	103

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103101504070249	15	1,960	Bright	sZ	190	-	SupplierStandard	103
103101503070249	15	1,960	Bright	zS	190	-	SupplierStandard	103
103101504300249	15	2,160	Galvanized	sZ	207	-	SupplierStandard	103
103101503300249	15	2,160	Galvanized	zS	207	-	SupplierStandard	103
103101504100249	15	2,160	Bright	sZ	207	-	SupplierStandard	103
103101503100249	15	2,160	Bright	zS	207	-	SupplierStandard	103
103101604250249	16	1,770	Galvanized	sZ	195	-	SupplierStandard	117
103101603250249	16	1,770	Galvanized	zS	195	-	SupplierStandard	117
103101604050249	16	1,770	Bright	sZ	195	-	SupplierStandard	117
103101603050249	16	1,770	Bright	zS	195	-	SupplierStandard	117
103101604270249	16	1,960	Galvanized	sZ	216	-	SupplierStandard	117
103101603270249	16	1,960	Galvanized	zS	216	-	SupplierStandard	117
103101604070249	16	1,960	Bright	sZ	216	-	SupplierStandard	117
103101603070249	16	1,960	Bright	zS	216	-	SupplierStandard	117
103101604300249	16	2,160	Galvanized	sZ	235	-	SupplierStandard	117
103101603300249	16	2,160	Galvanized	zS	235	-	SupplierStandard	117
103101604100249	16	2,160	Bright	sZ	235	-	SupplierStandard	117
103101603100249	16	2,160	Bright	zS	235	-	SupplierStandard	117
103101704250249	17	1,770	Galvanized	sZ	220	-	SupplierStandard	132
103101703250249	17	1,770	Galvanized	zS	220	-	SupplierStandard	132
103101704050249	17	1,770	Bright	sZ	220	-	SupplierStandard	132
103101703050249	17	1,770	Bright	zS	220	-	SupplierStandard	132
103101704270249	17	1,960	Galvanized	sZ	244	-	SupplierStandard	132
103101703270249	17	1,960	Galvanized	zS	244	-	SupplierStandard	132
103101704070249	17	1,960	Bright	sZ	244	-	SupplierStandard	132
103101703070249	17	1,960	Bright	zS	244	-	SupplierStandard	132
103101704300249	17	2,160	Galvanized	sZ	266	-	SupplierStandard	132
103101703300249	17	2,160	Galvanized	zS	266	-	SupplierStandard	132
103101704100249	17	2,160	Bright	sZ	266	-	SupplierStandard	132
103101703100249	17	2,160	Bright	zS	266	-	SupplierStandard	132
103101804250249	18	1,770	Galvanized	sZ	247	-	SupplierStandard	148

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103101803250249	18	1,770	Galvanized	zS	247	-	SupplierStandard	148
103101804050249	18	1,770	Bright	sZ	247	-	SupplierStandard	148
103101803050249	18	1,770	Bright	zS	247	-	SupplierStandard	148
103101804270249	18	1,960	Galvanized	sZ	274	-	SupplierStandard	148
103101803270249	18	1,960	Galvanized	zS	274	-	SupplierStandard	148
103101804070249	18	1,960	Bright	sZ	274	-	SupplierStandard	148
103101803070249	18	1,960	Bright	zS	274	-	SupplierStandard	148
103101804300249	18	2,160	Galvanized	sZ	298	-	SupplierStandard	148
103101803300249	18	2,160	Galvanized	zS	298	-	SupplierStandard	148
103101804100249	18	2,160	Bright	sZ	298	-	SupplierStandard	148
103101803100249	18	2,160	Bright	zS	298	-	SupplierStandard	148
103101904250249	19	1,770	Galvanized	sZ	275	-	SupplierStandard	165
103101903250249	19	1,770	Galvanized	zS	275	-	SupplierStandard	165
103101904050249	19	1,770	Bright	sZ	275	-	SupplierStandard	165
103101903050249	19	1,770	Bright	zS	275	-	SupplierStandard	165
103101904270249	19	1,960	Galvanized	sZ	305	-	SupplierStandard	165
103101903270249	19	1,960	Galvanized	zS	305	-	SupplierStandard	165
103101904070249	19	1,960	Bright	sZ	305	-	SupplierStandard	165
103101903070249	19	1,960	Bright	zS	305	-	SupplierStandard	165
103101904300249	19	2,160	Galvanized	sZ	332	-	SupplierStandard	165
103101903300249	19	2,160	Galvanized	zS	332	-	SupplierStandard	165
103101904100249	19	2,160	Bright	sZ	332	-	SupplierStandard	165
103101903100249	19	2,160	Bright	zS	332	-	SupplierStandard	165
103102004250249	20	1,770	Galvanized	sZ	305	-	SupplierStandard	182
103102003250249	20	1,770	Galvanized	zS	305	-	SupplierStandard	182
103102004050249	20	1,770	Bright	sZ	305	-	SupplierStandard	182
103102003050249	20	1,770	Bright	zS	305	-	SupplierStandard	182
103102004270249	20	1,960	Galvanized	sZ	338	-	SupplierStandard	182
103102003270249	20	1,960	Galvanized	zS	338	-	SupplierStandard	182
103102004070249	20	1,960	Bright	sZ	338	-	SupplierStandard	182
103102003070249	20	1,960	Bright	zS	338	-	SupplierStandard	182

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103102004300249	20	2,160	Galvanized	sZ	369	-	SupplierStandard	182
103102003300249	20	2,160	Galvanized	zS	369	-	SupplierStandard	182
103102004100249	20	2,160	Bright	sZ	369	-	SupplierStandard	182
103102003100249	20	2,160	Bright	zS	369	-	SupplierStandard	182
103102104250249	21	1,770	Galvanized	sZ	336	-	SupplierStandard	201
103102103250249	21	1,770	Galvanized	zS	336	-	SupplierStandard	201
103102104050249	21	1,770	Bright	sZ	336	-	SupplierStandard	201
103102103050249	21	1,770	Bright	zS	336	-	SupplierStandard	201
103102104270249	21	1,960	Galvanized	sZ	372	-	SupplierStandard	201
103102103270249	21	1,960	Galvanized	zS	372	-	SupplierStandard	201
103102104070249	21	1,960	Bright	sZ	372	-	SupplierStandard	201
103102103070249	21	1,960	Bright	zS	372	-	SupplierStandard	201
103102104300249	21	2,160	Galvanized	sZ	405	-	SupplierStandard	201
103102103300249	21	2,160	Galvanized	zS	405	-	SupplierStandard	201
103102104100249	21	2,160	Bright	sZ	405	-	SupplierStandard	201
103102103100249	21	2,160	Bright	zS	405	-	SupplierStandard	201
103102204250249	22	1,770	Galvanized	sZ	369	-	SupplierStandard	221
103102203250249	22	1,770	Galvanized	zS	369	-	SupplierStandard	221
103102204050249	22	1,770	Bright	sZ	369	-	SupplierStandard	221
103102203050249	22	1,770	Bright	zS	369	-	SupplierStandard	221
103102204270249	22	1,960	Galvanized	sZ	408	-	SupplierStandard	221
103102203270249	22	1,960	Galvanized	zS	408	-	SupplierStandard	221
103102204070249	22	1,960	Bright	sZ	408	-	SupplierStandard	221
103102203070249	22	1,960	Bright	zS	408	-	SupplierStandard	221
103102204300249	22	2,160	Galvanized	sZ	445	-	SupplierStandard	221
103102203300249	22	2,160	Galvanized	zS	445	-	SupplierStandard	221
103102204100249	22	2,160	Bright	sZ	445	-	SupplierStandard	221
103102203100249	22	2,160	Bright	zS	445	-	SupplierStandard	221
103102304250249	23	1,770	Galvanized	sZ	403	-	SupplierStandard	241
103102303250249	23	1,770	Galvanized	zS	403	-	SupplierStandard	241
103102304050249	23	1,770	Bright	sZ	403	-	SupplierStandard	241

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103102303050249	23	1,770	Bright	zS	403	-	SupplierStandard	241
103102304270249	23	1,960	Galvanized	sZ	446	-	SupplierStandard	241
103102303270249	23	1,960	Galvanized	zS	446	-	SupplierStandard	241
103102304070249	23	1,960	Bright	sZ	446	-	SupplierStandard	241
103102303070249	23	1,960	Bright	zS	446	-	SupplierStandard	241
103102304300249	23	2,160	Galvanized	sZ	486	-	SupplierStandard	241
103102303300249	23	2,160	Galvanized	zS	486	-	SupplierStandard	241
103102304100249	23	2,160	Bright	sZ	486	-	SupplierStandard	241
103102303100249	23	2,160	Bright	zS	486	-	SupplierStandard	241
103102404250249	24	1,770	Galvanized	sZ	439	-	SupplierStandard	263
103102403250249	24	1,770	Galvanized	zS	439	-	SupplierStandard	263
103102404050249	24	1,770	Bright	sZ	439	-	SupplierStandard	263
103102403050249	24	1,770	Bright	zS	439	-	SupplierStandard	263
103102404270249	24	1,960	Galvanized	sZ	486	-	SupplierStandard	263
103102403270249	24	1,960	Galvanized	zS	486	-	SupplierStandard	263
103102404070249	24	1,960	Bright	sZ	486	-	SupplierStandard	263
103102403070249	24	1,960	Bright	zS	486	-	SupplierStandard	263
103102404300249	24	2,160	Galvanized	sZ	530	-	SupplierStandard	263
103102403300249	24	2,160	Galvanized	zS	530	-	SupplierStandard	263
103102404100249	24	2,160	Bright	sZ	530	-	SupplierStandard	263
103102403100249	24	2,160	Bright	zS	530	-	SupplierStandard	263
103102504250249	25	1,770	Galvanized	sZ	176	-	SupplierStandard	285
103102503250249	25	1,770	Galvanized	zS	176	-	SupplierStandard	285
103102504050249	25	1,770	Bright	sZ	176	-	SupplierStandard	285
103102503050249	25	1,770	Bright	zS	176	-	SupplierStandard	285
103102504270249	25	1,960	Galvanized	sZ	528	-	SupplierStandard	285
103102503270249	25	1,960	Galvanized	zS	528	-	SupplierStandard	285
103102504070249	25	1,960	Bright	sZ	528	-	SupplierStandard	285
103102503070249	25	1,960	Bright	zS	528	-	SupplierStandard	285
103102504300249	25	2,160	Galvanized	sZ	574	-	SupplierStandard	285
103102503300249	25	2,160	Galvanized	zS	574	-	SupplierStandard	285

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103102504100249	25	2,160	Bright	sZ	574	-	SupplierStandard	285
103102503100249	25	2,160	Bright	zS	574	-	SupplierStandard	285
103102604250249	26	1,770	Galvanized	sZ	515	-	SupplierStandard	308
103102603250249	26	1,770	Galvanized	zS	515	-	SupplierStandard	308
103102604050249	26	1,770	Bright	sZ	515	-	SupplierStandard	308
103102603050249	26	1,770	Bright	zS	515	-	SupplierStandard	308
103102604270249	26	1,960	Galvanized	sZ	570	-	SupplierStandard	308
103102603270249	26	1,960	Galvanized	zS	570	-	SupplierStandard	308
103102604070249	26	1,960	Bright	sZ	570	-	SupplierStandard	308
103102603070249	26	1,960	Bright	zS	570	-	SupplierStandard	308
103102604300249	26	2,160	Galvanized	sZ	621	-	SupplierStandard	308
103102603300249	26	2,160	Galvanized	zS	621	-	SupplierStandard	308
103102604100249	26	2,160	Bright	sZ	621	-	SupplierStandard	308
103102603100249	26	2,160	Bright	zS	621	-	SupplierStandard	308
103102704250249	27	1,770	Galvanized	sZ	555	-	SupplierStandard	333
103102703250249	27	1,770	Galvanized	zS	555	-	SupplierStandard	333
103102704050249	27	1,770	Bright	sZ	555	-	SupplierStandard	333
103102703050249	27	1,770	Bright	zS	555	-	SupplierStandard	333
103102704270249	27	1,960	Galvanized	sZ	615	-	SupplierStandard	333
103102703270249	27	1,960	Galvanized	zS	615	-	SupplierStandard	333
103102704070249	27	1,960	Bright	sZ	615	-	SupplierStandard	333
103102703070249	27	1,960	Bright	zS	615	-	SupplierStandard	333
103102704300249	27	2,160	Galvanized	sZ	670	-	SupplierStandard	333
103102703300249	27	2,160	Galvanized	zS	670	-	SupplierStandard	333
103102704100249	27	2,160	Bright	sZ	670	-	SupplierStandard	333
103102703100249	27	2,160	Bright	zS	670	-	SupplierStandard	333
103102804250249	28	1,770	Galvanized	sZ	515	-	SupplierStandard	358
103102803250249	28	1,770	Galvanized	zS	515	-	SupplierStandard	358
103102804050249	28	1,770	Bright	sZ	515	-	SupplierStandard	358
103102803050249	28	1,770	Bright	zS	515	-	SupplierStandard	358
103102804270249	28	1,960	Galvanized	sZ	662	-	SupplierStandard	358

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103102803270249	28	1,960	Galvanized	zS	662	-	SupplierStandard	358
103102804070249	28	1,960	Bright	sZ	662	-	SupplierStandard	358
103102803070249	28	1,960	Bright	zS	662	-	SupplierStandard	358
103102804300249	28	2,160	Galvanized	sZ	720	-	SupplierStandard	358
103102803300249	28	2,160	Galvanized	zS	720	-	SupplierStandard	358
103102804100249	28	2,160	Bright	sZ	720	-	SupplierStandard	358
103102803100249	28	2,160	Bright	zS	720	-	SupplierStandard	358
103102904250249	29	1,770	Galvanized	sZ	641	-	SupplierStandard	384
103102903250249	29	1,770	Galvanized	zS	641	-	SupplierStandard	384
103102904050249	29	1,770	Bright	sZ	641	-	SupplierStandard	384
103102903050249	29	1,770	Bright	zS	641	-	SupplierStandard	384
103102904270249	29	1,960	Galvanized	sZ	710	-	SupplierStandard	384
103102903270249	29	1,960	Galvanized	zS	710	-	SupplierStandard	384
103102904070249	29	1,960	Bright	sZ	710	-	SupplierStandard	384
103102903070249	29	1,960	Bright	zS	710	-	SupplierStandard	384
103102904300249	29	2,160	Galvanized	sZ	773	-	SupplierStandard	384
103102903300249	29	2,160	Galvanized	zS	773	-	SupplierStandard	384
103102904100249	29	2,160	Bright	sZ	773	-	SupplierStandard	384
103102903100249	29	2,160	Bright	zS	773	-	SupplierStandard	384
103103004250249	30	1,770	Galvanized	sZ	686	-	SupplierStandard	411
103103003250249	30	1,770	Galvanized	zS	686	-	SupplierStandard	411
103103004050249	30	1,770	Bright	sZ	686	-	SupplierStandard	411
103103003050249	30	1,770	Bright	zS	686	-	SupplierStandard	411
103103004270249	30	1,960	Galvanized	sZ	759	-	SupplierStandard	411
103103003270249	30	1,960	Galvanized	zS	759	-	SupplierStandard	411
103103004070249	30	1,960	Bright	sZ	759	-	SupplierStandard	411
103103003070249	30	1,960	Bright	zS	759	-	SupplierStandard	411
103103004300249	30	2,160	Galvanized	sZ	827	-	SupplierStandard	411
103103003300249	30	2,160	Galvanized	zS	827	-	SupplierStandard	411
103103004100249	30	2,160	Bright	sZ	827	-	SupplierStandard	411
103103003100249	30	2,160	Bright	zS	827	-	SupplierStandard	411

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103103104250249	31	1,770	Galvanized	sZ	732	-	SupplierStandard	438
103103103250249	31	1,770	Galvanized	zS	732	-	SupplierStandard	438
103103104050249	31	1,770	Bright	sZ	732	-	SupplierStandard	438
103103103050249	31	1,770	Bright	zS	732	-	SupplierStandard	438
103103104270249	31	1,960	Galvanized	sZ	811	-	SupplierStandard	438
103103103270249	31	1,960	Galvanized	zS	811	-	SupplierStandard	438
103103104070249	31	1,960	Bright	sZ	811	-	SupplierStandard	438
103103103070249	31	1,960	Bright	zS	811	-	SupplierStandard	438
103103104300249	31	2,160	Galvanized	sZ	883	-	SupplierStandard	438
103103103300249	31	2,160	Galvanized	zS	883	-	SupplierStandard	438
103103104100249	31	2,160	Bright	sZ	883	-	SupplierStandard	438
103103103100249	31	2,160	Bright	zS	883	-	SupplierStandard	438
103103204250249	32	1,770	Galvanized	sZ	780	-	SupplierStandard	467
103103203250249	32	1,770	Galvanized	zS	780	-	SupplierStandard	467
103103204050249	32	1,770	Bright	sZ	780	-	SupplierStandard	467
103103203050249	32	1,770	Bright	zS	780	-	SupplierStandard	467
103103204270249	32	1,960	Galvanized	sZ	864	-	SupplierStandard	467
103103203270249	32	1,960	Galvanized	zS	864	-	SupplierStandard	467
103103204070249	32	1,960	Bright	sZ	864	-	SupplierStandard	467
103103203070249	32	1,960	Bright	zS	864	-	SupplierStandard	467
103103204300249	32	2,160	Galvanized	sZ	941	-	SupplierStandard	467
103103203300249	32	2,160	Galvanized	zS	941	-	SupplierStandard	467
103103204100249	32	2,160	Bright	sZ	941	-	SupplierStandard	467
103103203100249	32	2,160	Bright	zS	941	-	SupplierStandard	467
103103304250249	33	1,770	Galvanized	sZ	830	-	SupplierStandard	497
103103303250249	33	1,770	Galvanized	zS	830	-	SupplierStandard	497
103103304050249	33	1,770	Bright	sZ	830	-	SupplierStandard	497
103103303050249	33	1,770	Bright	zS	830	-	SupplierStandard	497
103103304270249	33	1,960	Galvanized	sZ	919	-	SupplierStandard	497
103103303270249	33	1,960	Galvanized	zS	919	-	SupplierStandard	497
103103304070249	33	1,960	Bright	sZ	919	-	SupplierStandard	497

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103103303070249	33	1,960	Bright	zS	919	-	SupplierStandard	497
103103304300249	33	2,160	Galvanized	sZ	1,001	-	SupplierStandard	497
103103303300249	33	2,160	Galvanized	zS	1,001	-	SupplierStandard	497
103103304100249	33	2,160	Bright	sZ	1,001	-	SupplierStandard	497
103103303100249	33	2,160	Bright	zS	1,001	-	SupplierStandard	497
103103404250249	34	1,770	Galvanized	sZ	881	-	SupplierStandard	527
103103403250249	34	1,770	Galvanized	zS	881	-	SupplierStandard	527
103103404050249	34	1,770	Bright	sZ	881	-	SupplierStandard	527
103103403050249	34	1,770	Bright	zS	881	-	SupplierStandard	527
103103404270249	34	1,960	Galvanized	sZ	975	-	SupplierStandard	527
103103403270249	34	1,960	Galvanized	zS	975	-	SupplierStandard	527
103103404070249	34	1,960	Bright	sZ	975	-	SupplierStandard	527
103103403070249	34	1,960	Bright	zS	975	-	SupplierStandard	527
103103404300249	34	2,160	Galvanized	sZ	1,062	-	SupplierStandard	527
103103403300249	34	2,160	Galvanized	zS	1,062	-	SupplierStandard	527
103103404100249	34	2,160	Bright	sZ	1,062	-	SupplierStandard	527
103103403100249	34	2,160	Bright	zS	1,062	-	SupplierStandard	527
103103504250249	35	1,770	Galvanized	sZ	933	-	SupplierStandard	559
103103503250249	35	1,770	Galvanized	zS	933	-	SupplierStandard	559
103103504050249	35	1,770	Bright	sZ	933	-	SupplierStandard	559
103103503050249	35	1,770	Bright	zS	933	-	SupplierStandard	559
103103504270249	35	1,960	Galvanized	sZ	1,034	-	SupplierStandard	559
103103503270249	35	1,960	Galvanized	zS	1,034	-	SupplierStandard	559
103103504070249	35	1,960	Bright	sZ	1,034	-	SupplierStandard	559
103103503070249	35	1,960	Bright	zS	1,034	-	SupplierStandard	559
103103504300249	35	2,160	Galvanized	sZ	1,125	-	SupplierStandard	559
103103503300249	35	2,160	Galvanized	zS	1,125	-	SupplierStandard	559
103103504100249	35	2,160	Bright	sZ	1,125	-	SupplierStandard	559
103103503100249	35	2,160	Bright	zS	1,125	-	SupplierStandard	559
103103604250249	36	1,770	Galvanized	sZ	988	-	SupplierStandard	591
103103603250249	36	1,770	Galvanized	zS	988	-	SupplierStandard	591

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103103604050249	36	1,770	Bright	sZ	988	-	SupplierStandard	591
103103603050249	36	1,770	Bright	zS	988	-	SupplierStandard	591
103103604270249	36	1,960	Galvanized	sZ	1,094	-	SupplierStandard	591
103103603270249	36	1,960	Galvanized	zS	1,094	-	SupplierStandard	591
103103604070249	36	1,960	Bright	sZ	1,094	-	SupplierStandard	591
103103603070249	36	1,960	Bright	zS	1,094	-	SupplierStandard	591
103103604300249	36	2,160	Galvanized	sZ	1,191	-	SupplierStandard	591
103103603300249	36	2,160	Galvanized	zS	1,191	-	SupplierStandard	591
103103604100249	36	2,160	Bright	sZ	1,191	-	SupplierStandard	591
103103603100249	36	2,160	Bright	zS	1,191	-	SupplierStandard	591
103103704250249	37	1,770	Galvanized	sZ	1,043	-	SupplierStandard	625
103103703250249	37	1,770	Galvanized	zS	1,043	-	SupplierStandard	625
103103704050249	37	1,770	Bright	sZ	1,043	-	SupplierStandard	625
103103703050249	37	1,770	Bright	zS	1,043	-	SupplierStandard	625
103103704270249	37	1,960	Galvanized	sZ	1,155	-	SupplierStandard	625
103103703270249	37	1,960	Galvanized	zS	1,155	-	SupplierStandard	625
103103704070249	37	1,960	Bright	sZ	1,155	-	SupplierStandard	625
103103703070249	37	1,960	Bright	zS	1,155	-	SupplierStandard	625
103103704300249	37	2,160	Galvanized	sZ	1,258	-	SupplierStandard	625
103103703300249	37	2,160	Galvanized	zS	1,258	-	SupplierStandard	625
103103704100249	37	2,160	Bright	sZ	1,258	-	SupplierStandard	625
103103703100249	37	2,160	Bright	zS	1,258	-	SupplierStandard	625
103103804250249	38	1,770	Galvanized	sZ	1,100	-	SupplierStandard	659
103103803250249	38	1,770	Galvanized	zS	1,100	-	SupplierStandard	659
103103804050249	38	1,770	Bright	sZ	1,100	-	SupplierStandard	659
103103803050249	38	1,770	Bright	zS	1,100	-	SupplierStandard	659
103103804270249	38	1,960	Galvanized	sZ	1,219	-	SupplierStandard	659
103103803270249	38	1,960	Galvanized	zS	1,219	-	SupplierStandard	659
103103804070249	38	1,960	Bright	sZ	1,219	-	SupplierStandard	659
103103803070249	38	1,960	Bright	zS	1,219	-	SupplierStandard	659
103103804300249	38	2,160	Galvanized	sZ	1,327	-	SupplierStandard	659

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103103803300249	38	2,160	Galvanized	zS	1,327	-	SupplierStandard	659
103103804100249	38	2,160	Bright	sZ	1,327	-	SupplierStandard	659
103103803100249	38	2,160	Bright	zS	1,327	-	SupplierStandard	659
103103904250249	39	1,770	Galvanized	sZ	1,159	-	SupplierStandard	694
103103903250249	39	1,770	Galvanized	zS	1,159	-	SupplierStandard	694
103103904050249	39	1,770	Bright	sZ	1,159	-	SupplierStandard	694
103103903050249	39	1,770	Bright	zS	1,159	-	SupplierStandard	694
103103904270249	39	1,960	Galvanized	sZ	1,284	-	SupplierStandard	694
103103903270249	39	1,960	Galvanized	zS	1,284	-	SupplierStandard	694
103103904070249	39	1,960	Bright	sZ	1,284	-	SupplierStandard	694
103103903070249	39	1,960	Bright	zS	1,284	-	SupplierStandard	694
103103904300249	39	2,160	Galvanized	sZ	1,398	-	SupplierStandard	694
103103903300249	39	2,160	Galvanized	zS	1,398	-	SupplierStandard	694
103103904100249	39	2,160	Bright	sZ	1,398	-	SupplierStandard	694
103103903100249	39	2,160	Bright	zS	1,398	-	SupplierStandard	694
103104004250249	40	1,770	Galvanized	sZ	1,220	-	SupplierStandard	730
103104003250249	40	1,770	Galvanized	zS	1,220	-	SupplierStandard	730
103104004050249	40	1,770	Bright	sZ	1,220	-	SupplierStandard	730
103104003050249	40	1,770	Bright	zS	1,220	-	SupplierStandard	730
103104004270249	40	1,960	Galvanized	sZ	1,350	-	SupplierStandard	730
103104003270249	40	1,960	Galvanized	zS	1,350	-	SupplierStandard	730
103104004070249	40	1,960	Bright	sZ	1,350	-	SupplierStandard	730
103104003070249	40	1,960	Bright	zS	1,350	-	SupplierStandard	730
103104004300249	40	2,160	Galvanized	sZ	1,470	-	SupplierStandard	730
103104003300249	40	2,160	Galvanized	zS	1,470	-	SupplierStandard	730
103104004100249	40	2,160	Bright	sZ	1,470	-	SupplierStandard	730
103104003100249	40	2,160	Bright	zS	1,470	-	SupplierStandard	730
103104104250249	41	1,770	Galvanized	sZ	1,281	-	SupplierStandard	767
103104103250249	41	1,770	Galvanized	zS	1,281	-	SupplierStandard	767
103104104050249	41	1,770	Bright	sZ	1,281	-	SupplierStandard	767
103104103050249	41	1,770	Bright	zS	1,281	-	SupplierStandard	767

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103104104270249	41	1,960	Galvanized	sZ	1,419	-	SupplierStandard	767
103104103270249	41	1,960	Galvanized	zS	1,419	-	SupplierStandard	767
103104104070249	41	1,960	Bright	sZ	1,419	-	SupplierStandard	767
103104103070249	41	1,960	Bright	zS	1,419	-	SupplierStandard	767
103104104300249	41	2,160	Galvanized	sZ	1,545	-	SupplierStandard	767
103104103300249	41	2,160	Galvanized	zS	1,545	-	SupplierStandard	767
103104104100249	41	2,160	Bright	sZ	1,545	-	SupplierStandard	767
103104103100249	41	2,160	Bright	zS	1,545	-	SupplierStandard	767
103104204250249	42	1,770	Galvanized	sZ	1,344	-	SupplierStandard	805
103104203250249	42	1,770	Galvanized	zS	1,344	-	SupplierStandard	805
103104204050249	42	1,770	Bright	sZ	1,344	-	SupplierStandard	805
103104203050249	42	1,770	Bright	zS	1,344	-	SupplierStandard	805
103104204270249	42	1,960	Galvanized	sZ	1,488	-	SupplierStandard	805
103104203270249	42	1,960	Galvanized	zS	1,488	-	SupplierStandard	805
103104204070249	42	1,960	Bright	sZ	1,488	-	SupplierStandard	805
103104203070249	42	1,960	Bright	zS	1,488	-	SupplierStandard	805
103104204300249	42	2,160	Galvanized	sZ	1,621	-	SupplierStandard	805
103104203300249	42	2,160	Galvanized	zS	1,621	-	SupplierStandard	805
103104204100249	42	2,160	Bright	sZ	1,621	-	SupplierStandard	805
103104203100249	42	2,160	Bright	zS	1,621	-	SupplierStandard	805
103104404250249	44	1,770	Galvanized	sZ	1,475	-	SupplierStandard	883
103104403250249	44	1,770	Galvanized	zS	1,475	-	SupplierStandard	883
103104404050249	44	1,770	Bright	sZ	1,475	-	SupplierStandard	883
103104403050249	44	1,770	Bright	zS	1,475	-	SupplierStandard	883
103104404270249	44	1,960	Galvanized	sZ	1,634	-	SupplierStandard	883
103104403270249	44	1,960	Galvanized	zS	1,634	-	SupplierStandard	883
103104404070249	44	1,960	Bright	sZ	1,634	-	SupplierStandard	883
103104403070249	44	1,960	Bright	zS	1,634	-	SupplierStandard	883
103104404300249	44	2,160	Galvanized	sZ	1,779	-	SupplierStandard	883
103104403300249	44	2,160	Galvanized	zS	1,779	-	SupplierStandard	883
103104404100249	44	2,160	Bright	sZ	1,779	-	SupplierStandard	883

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103104403100249	44	2,160	Bright	zS	1,779	-	SupplierStandard	883
103104504250249	45	1,770	Galvanized	sZ	1,543	-	SupplierStandard	924
103104503250249	45	1,770	Galvanized	zS	1,543	-	SupplierStandard	924
103104504050249	45	1,770	Bright	sZ	1,543	-	SupplierStandard	924
103104503050249	45	1,770	Bright	zS	1,543	-	SupplierStandard	924
103104504270249	45	1,960	Galvanized	sZ	1,709	-	SupplierStandard	924
103104503270249	45	1,960	Galvanized	zS	1,709	-	SupplierStandard	924
103104504070249	45	1,960	Bright	sZ	1,709	-	SupplierStandard	924
103104503070249	45	1,960	Bright	zS	1,709	-	SupplierStandard	924
103104504300249	45	2,160	Galvanized	sZ	1,861	-	SupplierStandard	924
103104503300249	45	2,160	Galvanized	zS	1,861	-	SupplierStandard	924
103104504100249	45	2,160	Bright	sZ	1,861	-	SupplierStandard	924
103104503100249	45	2,160	Bright	zS	1,861	-	SupplierStandard	924
103104604250249	46	1,770	Galvanized	sZ	1,613	-	SupplierStandard	965
103104603250249	46	1,770	Galvanized	zS	1,613	-	SupplierStandard	965
103104604050249	46	1,770	Bright	sZ	1,613	-	SupplierStandard	965
103104603050249	46	1,770	Bright	zS	1,613	-	SupplierStandard	965
103104604270249	46	1,960	Galvanized	sZ	1,786	-	SupplierStandard	965
103104603270249	46	1,960	Galvanized	zS	1,786	-	SupplierStandard	965
103104604070249	46	1,960	Bright	sZ	1,786	-	SupplierStandard	965
103104603070249	46	1,960	Bright	zS	1,786	-	SupplierStandard	965
103104604300249	46	2,160	Galvanized	sZ	1,945	-	SupplierStandard	965
103104603300249	46	2,160	Galvanized	zS	1,945	-	SupplierStandard	965
103104604100249	46	2,160	Bright	sZ	1,945	-	SupplierStandard	965
103104603100249	46	2,160	Bright	zS	1,945	-	SupplierStandard	965
103104704250249	47	1,770	Galvanized	sZ	1,683	-	SupplierStandard	1,008
103104703250249	47	1,770	Galvanized	zS	1,683	-	SupplierStandard	1,008
103104704050249	47	1,770	Bright	sZ	1,683	-	SupplierStandard	1,008
103104703050249	47	1,770	Bright	zS	1,683	-	SupplierStandard	1,008
103104704270249	47	1,960	Galvanized	sZ	1,864	-	SupplierStandard	1,008
103104703270249	47	1,960	Galvanized	zS	1,864	-	SupplierStandard	1,008

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103104704070249	47	1,960	Bright	sZ	1,864	-	SupplierStandard	1,008
103104703070249	47	1,960	Bright	zS	1,864	-	SupplierStandard	1,008
103104704300249	47	2,160	Galvanized	sZ	2,030	-	SupplierStandard	1,008
103104703300249	47	2,160	Galvanized	zS	2,030	-	SupplierStandard	1,008
103104704100249	47	2,160	Bright	sZ	2,030	-	SupplierStandard	1,008
103104703100249	47	2,160	Bright	zS	2,030	-	SupplierStandard	1,008
103104804250249	48	1,770	Galvanized	sZ	1,756	-	SupplierStandard	1,051
103104803250249	48	1,770	Galvanized	zS	1,756	-	SupplierStandard	1,051
103104804050249	48	1,770	Bright	sZ	1,756	-	SupplierStandard	1,051
103104803050249	48	1,770	Bright	zS	1,756	-	SupplierStandard	1,051
103104804270249	48	1,960	Galvanized	sZ	1,945	-	SupplierStandard	1,051
103104803270249	48	1,960	Galvanized	zS	1,945	-	SupplierStandard	1,051
103104804070249	48	1,960	Bright	sZ	1,945	-	SupplierStandard	1,051
103104803070249	48	1,960	Bright	zS	1,945	-	SupplierStandard	1,051
103104804300249	48	2,160	Galvanized	sZ	2,117	-	SupplierStandard	1,051
103104803300249	48	2,160	Galvanized	zS	2,117	-	SupplierStandard	1,051
103104804100249	48	2,160	Bright	sZ	2,117	-	SupplierStandard	1,051
103104803100249	48	2,160	Bright	zS	2,117	-	SupplierStandard	1,051
103104904250249	49	1,770	Galvanized	sZ	1,830	-	SupplierStandard	1,095
103104903250249	49	1,770	Galvanized	zS	1,830	-	SupplierStandard	1,095
103104904050249	49	1,770	Bright	sZ	1,830	-	SupplierStandard	1,095
103104903050249	49	1,770	Bright	zS	1,830	-	SupplierStandard	1,095
103104904270249	49	1,960	Galvanized	sZ	2,026	-	SupplierStandard	1,095
103104903270249	49	1,960	Galvanized	zS	2,026	-	SupplierStandard	1,095
103104904070249	49	1,960	Bright	sZ	2,026	-	SupplierStandard	1,095
103104903070249	49	1,960	Bright	zS	2,026	-	SupplierStandard	1,095
103104904300249	49	2,160	Galvanized	sZ	2,206	-	SupplierStandard	1,095
103104903300249	49	2,160	Galvanized	zS	2,206	-	SupplierStandard	1,095
103104904100249	49	2,160	Bright	sZ	2,206	-	SupplierStandard	1,095
103104903100249	49	2,160	Bright	zS	2,206	-	SupplierStandard	1,095
103105004250249	50	1,770	Galvanized	sZ	1,905	-	SupplierStandard	1,140

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103105003250249	50	1,770	Galvanized	zS	1,905	-	SupplierStandard	1,140
103105004050249	50	1,770	Bright	sZ	1,905	-	SupplierStandard	1,140
103105003050249	50	1,770	Bright	zS	1,905	-	SupplierStandard	1,140
103105004270249	50	1,960	Galvanized	sZ	2,110	-	SupplierStandard	1,140
103105003270249	50	1,960	Galvanized	zS	2,110	-	SupplierStandard	1,140
103105004070249	50	1,960	Bright	sZ	2,110	-	SupplierStandard	1,140
103105003070249	50	1,960	Bright	zS	2,110	-	SupplierStandard	1,140
103105004300249	50	2,160	Galvanized	sZ	2,297	-	SupplierStandard	1,140
103105003300249	50	2,160	Galvanized	zS	2,297	-	SupplierStandard	1,140
103105004100249	50	2,160	Bright	sZ	2,297	-	SupplierStandard	1,140
103105003100249	50	2,160	Bright	zS	2,297	-	SupplierStandard	1,140
103105104250249	51	1,770	Galvanized	sZ	1,982	-	SupplierStandard	1,187
103105103250249	51	1,770	Galvanized	zS	1,982	-	SupplierStandard	1,187
103105104050249	51	1,770	Bright	sZ	1,982	-	SupplierStandard	1,187
103105103050249	51	1,770	Bright	zS	1,982	-	SupplierStandard	1,187
103105104270249	51	1,960	Galvanized	sZ	2,195	-	SupplierStandard	1,187
103105103270249	51	1,960	Galvanized	zS	2,195	-	SupplierStandard	1,187
103105104070249	51	1,960	Bright	sZ	2,195	-	SupplierStandard	1,187
103105103070249	51	1,960	Bright	zS	2,195	-	SupplierStandard	1,187
103105104300249	51	2,160	Galvanized	sZ	2,390	-	SupplierStandard	1,187
103105103300249	51	2,160	Galvanized	zS	2,390	-	SupplierStandard	1,187
103105104100249	51	2,160	Bright	sZ	2,390	-	SupplierStandard	1,187
103105103100249	51	2,160	Bright	zS	2,390	-	SupplierStandard	1,187
103105204250249	52	1,770	Galvanized	sZ	2,061	-	SupplierStandard	1,233
103105203250249	52	1,770	Galvanized	zS	2,061	-	SupplierStandard	1,233
103105204050249	52	1,770	Bright	sZ	2,061	-	SupplierStandard	1,233
103105203050249	52	1,770	Bright	zS	2,061	-	SupplierStandard	1,233
103105204270249	52	1,960	Galvanized	sZ	2,281	-	SupplierStandard	1,233
103105203270249	52	1,960	Galvanized	zS	2,281	-	SupplierStandard	1,233
103105204070249	52	1,960	Bright	sZ	2,281	-	SupplierStandard	1,233
103105203070249	52	1,960	Bright	zS	2,281	-	SupplierStandard	1,233

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103105204300249	52	2,160	Galvanized	sZ	2,485	-	SupplierStandard	1,233
103105203300249	52	2,160	Galvanized	zS	2,485	-	SupplierStandard	1,233
103105204100249	52	2,160	Bright	sZ	2,485	-	SupplierStandard	1,233
103105203100249	52	2,160	Bright	zS	2,485	-	SupplierStandard	1,233
103105304250249	53	1,770	Galvanized	sZ	2,140	-	SupplierStandard	1,281
103105303250249	53	1,770	Galvanized	zS	2,140	-	SupplierStandard	1,281
103105304050249	53	1,770	Bright	sZ	2,140	-	SupplierStandard	1,281
103105303050249	53	1,770	Bright	zS	2,140	-	SupplierStandard	1,281
103105304270249	53	1,960	Galvanized	sZ	2,370	-	SupplierStandard	1,281
103105303270249	53	1,960	Galvanized	zS	2,370	-	SupplierStandard	1,281
103105304070249	53	1,960	Bright	sZ	2,370	-	SupplierStandard	1,281
103105303070249	53	1,960	Bright	zS	2,370	-	SupplierStandard	1,281
103105304300249	53	2,160	Galvanized	sZ	2,581	-	SupplierStandard	1,281
103105303300249	53	2,160	Galvanized	zS	2,581	-	SupplierStandard	1,281
103105304100249	53	2,160	Bright	sZ	2,581	-	SupplierStandard	1,281
103105303100249	53	2,160	Bright	zS	2,581	-	SupplierStandard	1,281
103105404250249	54	1,770	Galvanized	sZ	2,222	-	SupplierStandard	1,330
103105403250249	54	1,770	Galvanized	zS	2,222	-	SupplierStandard	1,330
103105404050249	54	1,770	Bright	sZ	2,222	-	SupplierStandard	1,330
103105403050249	54	1,770	Bright	zS	2,222	-	SupplierStandard	1,330
103105404270249	54	1,960	Galvanized	sZ	2,460	-	SupplierStandard	1,330
103105403270249	54	1,960	Galvanized	zS	2,460	-	SupplierStandard	1,330
103105404070249	54	1,960	Bright	sZ	2,460	-	SupplierStandard	1,330
103105403070249	54	1,960	Bright	zS	2,460	-	SupplierStandard	1,330
103105404300249	54	2,160	Galvanized	sZ	2,679	-	SupplierStandard	1,330
103105403300249	54	2,160	Galvanized	zS	2,679	-	SupplierStandard	1,330
103105404100249	54	2,160	Bright	sZ	2,679	-	SupplierStandard	1,330
103105403100249	54	2,160	Bright	zS	2,679	-	SupplierStandard	1,330
103105504250249	55	1,770	Galvanized	sZ	2,305	-	SupplierStandard	1,380
103105503250249	55	1,770	Galvanized	zS	2,305	-	SupplierStandard	1,380
103105504050249	55	1,770	Bright	sZ	2,305	-	SupplierStandard	1,380

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103105503050249	55	1,770	Bright	zS	2,305	-	SupplierStandard	1,380
103105504270249	55	1,960	Galvanized	sZ	2,553	-	SupplierStandard	1,380
103105503270249	55	1,960	Galvanized	zS	2,553	-	SupplierStandard	1,380
103105504070249	55	1,960	Bright	sZ	2,553	-	SupplierStandard	1,380
103105503070249	55	1,960	Bright	zS	2,553	-	SupplierStandard	1,380
103105504300249	55	2,160	Galvanized	sZ	2,780	-	SupplierStandard	1,380
103105503300249	55	2,160	Galvanized	zS	2,780	-	SupplierStandard	1,380
103105504100249	55	2,160	Bright	sZ	2,780	-	SupplierStandard	1,380
103105503100249	55	2,160	Bright	zS	2,780	-	SupplierStandard	1,380
103105604250249	56	1,770	Galvanized	sZ	2,390	-	SupplierStandard	1,431
103105603250249	56	1,770	Galvanized	zS	2,390	-	SupplierStandard	1,431
103105604050249	56	1,770	Bright	sZ	2,390	-	SupplierStandard	1,431
103105603050249	56	1,770	Bright	zS	2,390	-	SupplierStandard	1,431
103105604270249	56	1,960	Galvanized	sZ	2,647	-	SupplierStandard	1,431
103105603270249	56	1,960	Galvanized	zS	2,647	-	SupplierStandard	1,431
103105604070249	56	1,960	Bright	sZ	2,647	-	SupplierStandard	1,431
103105603070249	56	1,960	Bright	zS	2,647	-	SupplierStandard	1,431
103105604300249	56	2,160	Galvanized	sZ	2,882	-	SupplierStandard	1,431
103105603300249	56	2,160	Galvanized	zS	2,882	-	SupplierStandard	1,431
103105604100249	56	2,160	Bright	sZ	2,882	-	SupplierStandard	1,431
103105603100249	56	2,160	Bright	zS	2,882	-	SupplierStandard	1,431
103105704250249	57	1,770	Galvanized	sZ	2,476	-	SupplierStandard	1,482
103105703250249	57	1,770	Galvanized	zS	2,476	-	SupplierStandard	1,482
103105704050249	57	1,770	Bright	sZ	2,476	-	SupplierStandard	1,482
103105703050249	57	1,770	Bright	zS	2,476	-	SupplierStandard	1,482
103105704270249	57	1,960	Galvanized	sZ	2,742	-	SupplierStandard	1,482
103105703270249	57	1,960	Galvanized	zS	2,742	-	SupplierStandard	1,482
103105704070249	57	1,960	Bright	sZ	2,742	-	SupplierStandard	1,482
103105703070249	57	1,960	Bright	zS	2,742	-	SupplierStandard	1,482
103105704300249	57	2,160	Galvanized	sZ	2,986	-	SupplierStandard	1,482
103105703300249	57	2,160	Galvanized	zS	2,986	-	SupplierStandard	1,482

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103105704100249	57	2,160	Bright	sZ	2,986	-	SupplierStandard	1,482
103105703100249	57	2,160	Bright	zS	2,986	-	SupplierStandard	1,482
103105804250249	58	1,770	Galvanized	sZ	2,584	-	SupplierStandard	1,535
103105803250249	58	1,770	Galvanized	zS	2,584	-	SupplierStandard	1,535
103105804050249	58	1,770	Bright	sZ	2,584	-	SupplierStandard	1,535
103105803050249	58	1,770	Bright	zS	2,584	-	SupplierStandard	1,535
103105804270249	58	1,960	Galvanized	sZ	2,838	-	SupplierStandard	1,535
103105803270249	58	1,960	Galvanized	zS	2,838	-	SupplierStandard	1,535
103105804070249	58	1,960	Bright	sZ	2,838	-	SupplierStandard	1,535
103105803070249	58	1,960	Bright	zS	2,838	-	SupplierStandard	1,535
103105804300249	58	2,160	Galvanized	sZ	3,091	-	SupplierStandard	1,535
103105803300249	58	2,160	Galvanized	zS	3,091	-	SupplierStandard	1,535
103105804100249	58	2,160	Bright	sZ	3,091	-	SupplierStandard	1,535
103105803100249	58	2,160	Bright	zS	3,091	-	SupplierStandard	1,535
103105904250249	59	1,770	Galvanized	sZ	2,653	-	SupplierStandard	1,588
103105903250249	59	1,770	Galvanized	zS	2,653	-	SupplierStandard	1,588
103105904050249	59	1,770	Bright	sZ	2,653	-	SupplierStandard	1,588
103105903050249	59	1,770	Bright	zS	2,653	-	SupplierStandard	1,588
103105904270249	59	1,960	Galvanized	sZ	2,937	-	SupplierStandard	1,588
103105903270249	59	1,960	Galvanized	zS	2,937	-	SupplierStandard	1,588
103105904070249	59	1,960	Bright	sZ	2,937	-	SupplierStandard	1,588
103105903070249	59	1,960	Bright	zS	2,937	-	SupplierStandard	1,588
103105904300249	59	2,160	Galvanized	sZ	3,199	-	SupplierStandard	1,588
103105903300249	59	2,160	Galvanized	zS	3,199	-	SupplierStandard	1,588
103105904100249	59	2,160	Bright	sZ	3,199	-	SupplierStandard	1,588
103105903100249	59	2,160	Bright	zS	3,199	-	SupplierStandard	1,588
103106004250249	60	1,770	Galvanized	sZ	2,743	-	SupplierStandard	1,642
103106003250249	60	1,770	Galvanized	zS	2,743	-	SupplierStandard	1,642
103106004050249	60	1,770	Bright	sZ	2,743	-	SupplierStandard	1,642
103106003050249	60	1,770	Bright	zS	2,743	-	SupplierStandard	1,642
103106004270249	60	1,960	Galvanized	sZ	3,038	-	SupplierStandard	1,642

## Steel wire rope Diepa PZ299

### Technical data

Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
103106003270249	60	1,960	Galvanized	zS	3,038	-	SupplierStandard	1,642
103106004070249	60	1,960	Bright	sZ	3,038	-	SupplierStandard	1,642
103106003070249	60	1,960	Bright	zS	3,038	-	SupplierStandard	1,642
103106004300249	60	2,160	Galvanized	sZ	3,308	-	SupplierStandard	1,642
103106003300249	60	2,160	Galvanized	zS	3,308	-	SupplierStandard	1,642
103106004100249	60	2,160	Bright	sZ	3,308	-	SupplierStandard	1,642
103106003100249	60	2,160	Bright	zS	3,308	-	SupplierStandard	1,642