
CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Product information



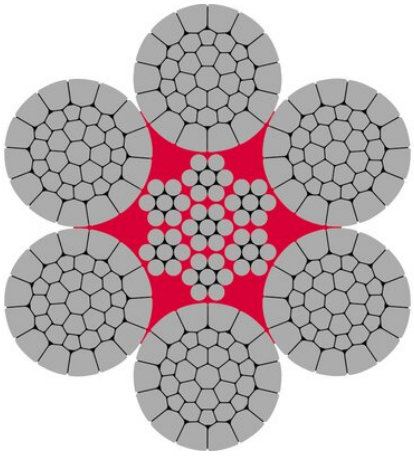

Diepa PZ299 is a non-rotation resistant wire rope with compacted outer strands and plastic insert.
Applications: Universal use for single and multiple layer coiling on the drum.

Lay: Ordinary lay with internal plastic component.
ISO 4309 Rope Category No: 4-6mm **RCN.01**, 7-60mm **RCN.09**

... *Read more*

Marking: According to standard
Finish: Galvanized or bright.
Standard: EN 12385-4
Warning: Not to be used with a swivel.

Fill factor: 0.6526
RCN: 01

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100404250249	4	1,770	Galvanized	sZ	12.2	SupplierStandard	7
103100403250249	4	1,770	Galvanized	zS	12.2	SupplierStandard	7
103100404050249	4	1,770	Bright	sZ	12.2	SupplierStandard	7
103100403050249	4	1,770	Bright	zS	12.2	SupplierStandard	7
103100404270249	4	1,960	Galvanized	sZ	13.5	SupplierStandard	7
103100403270249	4	1,960	Galvanized	zS	13.5	SupplierStandard	7
103100404070249	4	1,960	Bright	sZ	13.5	SupplierStandard	7
103100403070249	4	1,960	Bright	zS	13.5	SupplierStandard	7
103100404300249	4	2,160	Galvanized	sZ	14.7	SupplierStandard	7
103100403300249	4	2,160	Galvanized	zS	14.7	SupplierStandard	7
103100404100249	4	2,160	Bright	sZ	14.7	SupplierStandard	7
103100403100249	4	2,160	Bright	zS	14.7	SupplierStandard	7
103100504250249	5	1,770	Galvanized	sZ	19.1	SupplierStandard	11
103100503250249	5	1,770	Galvanized	zS	19.1	SupplierStandard	11
103100504050249	5	1,770	Bright	sZ	19.1	SupplierStandard	11
103100503050249	5	1,770	Bright	zS	19.1	SupplierStandard	11
103100504270249	5	1,960	Galvanized	sZ	21.1	SupplierStandard	11
103100503270249	5	1,960	Galvanized	zS	21.1	SupplierStandard	11
103100504070249	5	1,960	Bright	sZ	21.1	SupplierStandard	11
103100503070249	5	1,960	Bright	zS	21.1	SupplierStandard	11
103100504300249	5	2,160	Galvanized	sZ	22.9	SupplierStandard	11
103100503300249	5	2,160	Galvanized	zS	22.9	SupplierStandard	11
103100504100249	5	2,160	Bright	sZ	22.9	SupplierStandard	11
103100503100249	5	2,160	Bright	zS	22.9	SupplierStandard	11
103100604250249	6	1,770	Galvanized	sZ	27.5	SupplierStandard	16
103100603250249	6	1,770	Galvanized	zS	27.5	SupplierStandard	16
103100604050249	6	1,770	Bright	sZ	27.5	SupplierStandard	16
103100603050249	6	1,770	Bright	zS	27.5	SupplierStandard	16
103100604270249	6	1,960	Galvanized	sZ	30.5	SupplierStandard	16
103100603270249	6	1,960	Galvanized	zS	30.5	SupplierStandard	16
103100604070249	6	1,960	Bright	sZ	30.5	SupplierStandard	16

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100603070249	6	1,960	Bright	zS	30.5	SupplierStandard	16
103100604300249	6	2,160	Galvanized	sZ	33.2	SupplierStandard	16
103100603300249	6	2,160	Galvanized	zS	33.2	SupplierStandard	16
103100604100249	6	2,160	Bright	sZ	33.2	SupplierStandard	16
103100603100249	6	2,160	Bright	zS	33.2	SupplierStandard	16
103100654250249	6.5	1,770	Galvanized	sZ	32.2	SupplierStandard	19
103100653250249	6.5	1,770	Galvanized	zS	32.2	SupplierStandard	19
103100654050249	6.5	1,770	Bright	sZ	32.2	SupplierStandard	19
103100653050249	6.5	1,770	Bright	zS	32.2	SupplierStandard	19
103100654270249	6.5	1,960	Galvanized	sZ	35.7	SupplierStandard	19
103100653270249	6.5	1,960	Galvanized	zS	35.7	SupplierStandard	19
103100654070249	6.5	1,960	Bright	sZ	35.7	SupplierStandard	19
103100653070249	6.5	1,960	Bright	zS	35.7	SupplierStandard	19
103100654300249	6.5	2,160	Galvanized	sZ	38.8	SupplierStandard	19
103100653300249	6.5	2,160	Galvanized	zS	38.8	SupplierStandard	19
103100654100249	6.5	2,160	Bright	sZ	38.8	SupplierStandard	19
103100653100249	6.5	2,160	Bright	zS	38.8	SupplierStandard	19
103100704250249	7	1,770	Galvanized	sZ	37.3	SupplierStandard	22
103100703250249	7	1,770	Galvanized	zS	37.3	SupplierStandard	22
103100704050249	7	1,770	Bright	sZ	37.3	SupplierStandard	22
103100703050249	7	1,770	Bright	zS	37.3	SupplierStandard	22
103100704270249	7	1,960	Galvanized	sZ	41.3	SupplierStandard	22
103100703270249	7	1,960	Galvanized	zS	41.3	SupplierStandard	22
103100704070249	7	1,960	Bright	sZ	41.3	SupplierStandard	22
103100703070249	7	1,960	Bright	zS	41.3	SupplierStandard	22
103100704300249	7	2,160	Galvanized	sZ	45	SupplierStandard	22
103100703300249	7	2,160	Galvanized	zS	45	SupplierStandard	22
103100704100249	7	2,160	Bright	sZ	45	SupplierStandard	22
103100703100249	7	2,160	Bright	zS	45	SupplierStandard	22
103100754250249	7.5	1,770	Galvanized	sZ	42.9	SupplierStandard	26
103100753250249	7.5	1,770	Galvanized	zS	42.9	SupplierStandard	26

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100754050249	7.5	1,770	Bright	sZ	42.9	SupplierStandard	26
103100753050249	7.5	1,770	Bright	zS	42.9	SupplierStandard	26
103100754270249	7.5	1,960	Galvanized	sZ	47.5	SupplierStandard	26
103100753270249	7.5	1,960	Galvanized	zS	47.5	SupplierStandard	26
103100754070249	7.5	1,960	Bright	sZ	47.5	SupplierStandard	26
103100753070249	7.5	1,960	Bright	zS	47.5	SupplierStandard	26
103100754300249	7.5	2,160	Galvanized	sZ	51.7	SupplierStandard	26
103100753300249	7.5	2,160	Galvanized	zS	51.7	SupplierStandard	26
103100754100249	7.5	2,160	Bright	sZ	51.7	SupplierStandard	26
103100753100249	7.5	2,160	Bright	zS	51.7	SupplierStandard	26
103100804250249	8	1,770	Galvanized	sZ	48.8	SupplierStandard	29
103100803250249	8	1,770	Galvanized	zS	48.8	SupplierStandard	29
103100804050249	8	1,770	Bright	sZ	48.8	SupplierStandard	29
103100803050249	8	1,770	Bright	zS	48.8	SupplierStandard	29
103100804270249	8	1,960	Galvanized	sZ	54	SupplierStandard	29
103100803270249	8	1,960	Galvanized	zS	54	SupplierStandard	29
103100804070249	8	1,960	Bright	sZ	54	SupplierStandard	29
103100803070249	8	1,960	Bright	zS	54	SupplierStandard	29
103100804300249	8	2,160	Galvanized	sZ	58.8	SupplierStandard	29
103100803300249	8	2,160	Galvanized	zS	58.8	SupplierStandard	29
103100804100249	8	2,160	Bright	sZ	58.8	SupplierStandard	29
103100803100249	8	2,160	Bright	zS	58.8	SupplierStandard	29
103100854250249	8.5	1,770	Galvanized	sZ	55.1	SupplierStandard	33
103100853250249	8.5	1,770	Galvanized	zS	55.1	SupplierStandard	33
103100854050249	8.5	1,770	Bright	sZ	55.1	SupplierStandard	33
103100853050249	8.5	1,770	Bright	zS	55.1	SupplierStandard	33
103100854270249	8.5	1,960	Galvanized	sZ	61	SupplierStandard	33
103100853270249	8.5	1,960	Galvanized	zS	61	SupplierStandard	33
103100854070249	8.5	1,960	Bright	sZ	61	SupplierStandard	33
103100853070249	8.5	1,960	Bright	zS	61	SupplierStandard	33
103100854300249	8.5	2,160	Galvanized	sZ	66.4	SupplierStandard	33

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100853300249	8.5	2,160	Galvanized	zS	66.4	SupplierStandard	33
103100854100249	8.5	2,160	Bright	sZ	66.4	SupplierStandard	33
103100853100249	8.5	2,160	Bright	zS	66.4	SupplierStandard	33
103100904250249	9	1,770	Galvanized	sZ	61.7	SupplierStandard	37
103100903250249	9	1,770	Galvanized	zS	61.7	SupplierStandard	37
103100904050249	9	1,770	Bright	sZ	61.7	SupplierStandard	37
103100903050249	9	1,770	Bright	zS	61.7	SupplierStandard	37
103100904270249	9	1,960	Galvanized	sZ	68.3	SupplierStandard	37
103100903270249	9	1,960	Galvanized	zS	68.3	SupplierStandard	37
103100904070249	9	1,960	Bright	sZ	68.3	SupplierStandard	37
103100903070249	9	1,960	Bright	zS	68.3	SupplierStandard	37
103100904300249	9	2,160	Galvanized	sZ	74.4	SupplierStandard	37
103100903300249	9	2,160	Galvanized	zS	74.4	SupplierStandard	37
103100904100249	9	2,160	Bright	sZ	74.4	SupplierStandard	37
103100903100249	9	2,160	Bright	zS	74.4	SupplierStandard	37
103100954250249	9.5	1,770	Galvanized	sZ	68.8	SupplierStandard	41
103100953250249	9.5	1,770	Galvanized	zS	68.8	SupplierStandard	41
103100954050249	9.5	1,770	Bright	sZ	68.8	SupplierStandard	41
103100953050249	9.5	1,770	Bright	zS	68.8	SupplierStandard	41
103100954270249	9.5	1,960	Galvanized	sZ	76.2	SupplierStandard	41
103100953270249	9.5	1,960	Galvanized	zS	76.2	SupplierStandard	41
103100954070249	9.5	1,960	Bright	sZ	76.2	SupplierStandard	41
103100953070249	9.5	1,960	Bright	zS	76.2	SupplierStandard	41
103100954300249	9.5	2,160	Galvanized	sZ	82.9	SupplierStandard	41
103100953300249	9.5	2,160	Galvanized	zS	82.9	SupplierStandard	41
103100954100249	9.5	2,160	Bright	sZ	82.9	SupplierStandard	41
103100953100249	9.5	2,160	Bright	zS	82.9	SupplierStandard	41
103101004250249	10	1,770	Galvanized	sZ	76.2	SupplierStandard	46
103101003250249	10	1,770	Galvanized	zS	76.2	SupplierStandard	46
103101004050249	10	1,770	Bright	sZ	76.2	SupplierStandard	46
103101003050249	10	1,770	Bright	zS	76.2	SupplierStandard	46

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101004270249	10	1,960	Galvanized	sZ	84	SupplierStandard	46
103101003270249	10	1,960	Galvanized	zS	84	SupplierStandard	46
103101004070249	10	1,960	Bright	sZ	84	SupplierStandard	46
103101003070249	10	1,960	Bright	zS	84	SupplierStandard	46
103101004300249	10	2,160	Galvanized	sZ	92.1	SupplierStandard	46
103101003300249	10	2,160	Galvanized	zS	92.1	SupplierStandard	46
103101004100249	10	2,160	Bright	sZ	92.1	SupplierStandard	46
103101003100249	10	2,160	Bright	zS	92.1	SupplierStandard	46
103101104250249	11	1,770	Galvanized	sZ	92.4	SupplierStandard	55
103101103250249	11	1,770	Galvanized	zS	92.4	SupplierStandard	55
103101104050249	11	1,770	Bright	sZ	92.4	SupplierStandard	55
103101103050249	11	1,770	Bright	zS	92.4	SupplierStandard	55
103101104270249	11	1,960	Galvanized	sZ	102	SupplierStandard	55
103101103270249	11	1,960	Galvanized	zS	102	SupplierStandard	55
103101104070249	11	1,960	Bright	sZ	102	SupplierStandard	55
103101103070249	11	1,960	Bright	zS	102	SupplierStandard	55
103101104300249	11	2,160	Galvanized	sZ	111	SupplierStandard	55
103101103300249	11	2,160	Galvanized	zS	111	SupplierStandard	55
103101104100249	11	2,160	Bright	sZ	111	SupplierStandard	55
103101103100249	11	2,160	Bright	zS	111	SupplierStandard	55
103101204250249	12	1,770	Galvanized	sZ	110	SupplierStandard	66
103101203250249	12	1,770	Galvanized	zS	110	SupplierStandard	66
103101204050249	12	1,770	Bright	sZ	110	SupplierStandard	66
103101203050249	12	1,770	Bright	zS	110	SupplierStandard	66
103101204270249	12	1,960	Galvanized	sZ	122	SupplierStandard	66
103101203270249	12	1,960	Galvanized	zS	122	SupplierStandard	66
103101204070249	12	1,960	Bright	sZ	122	SupplierStandard	66
103101203070249	12	1,960	Bright	zS	122	SupplierStandard	66
103101204300249	12	2,160	Galvanized	sZ	132	SupplierStandard	66
103101203300249	12	2,160	Galvanized	zS	132	SupplierStandard	66
103101204100249	12	2,160	Bright	sZ	132	SupplierStandard	66

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101203100249	12	2,160	Bright	zS	132	SupplierStandard	66
103101304250249	13	1,770	Galvanized	sZ	129	SupplierStandard	77
103101303250249	13	1,770	Galvanized	zS	129	SupplierStandard	77
103101304050249	13	1,770	Bright	sZ	129	SupplierStandard	77
103101303050249	13	1,770	Bright	zS	129	SupplierStandard	77
103101304270249	13	1,960	Galvanized	sZ	143	SupplierStandard	77
103101303270249	13	1,960	Galvanized	zS	143	SupplierStandard	77
103101304070249	13	1,960	Bright	sZ	143	SupplierStandard	77
103101303070249	13	1,960	Bright	zS	143	SupplierStandard	77
103101304300249	13	2,160	Galvanized	sZ	155	SupplierStandard	77
103101303300249	13	2,160	Galvanized	zS	155	SupplierStandard	77
103101304100249	13	2,160	Bright	sZ	155	SupplierStandard	77
103101303100249	13	2,160	Bright	zS	155	SupplierStandard	77
103101404250249	14	1,770	Galvanized	sZ	150	SupplierStandard	89
103101403250249	14	1,770	Galvanized	zS	150	SupplierStandard	89
103101404050249	14	1,770	Bright	sZ	150	SupplierStandard	89
103101403050249	14	1,770	Bright	zS	150	SupplierStandard	89
103101404270249	14	1,960	Galvanized	sZ	165	SupplierStandard	89
103101403270249	14	1,960	Galvanized	zS	165	SupplierStandard	89
103101404070249	14	1,960	Bright	sZ	165	SupplierStandard	89
103101403070249	14	1,960	Bright	zS	165	SupplierStandard	89
103101404300249	14	2,160	Galvanized	sZ	180	SupplierStandard	89
103101403300249	14	2,160	Galvanized	zS	180	SupplierStandard	89
103101404100249	14	2,160	Bright	sZ	180	SupplierStandard	89
103101403100249	14	2,160	Bright	zS	180	SupplierStandard	89
103101504250249	15	1,770	Galvanized	sZ	171	SupplierStandard	103
103101503250249	15	1,770	Galvanized	zS	171	SupplierStandard	103
103101504050249	15	1,770	Bright	sZ	171	SupplierStandard	103
103101503050249	15	1,770	Bright	zS	171	SupplierStandard	103
103101504270249	15	1,960	Galvanized	sZ	190	SupplierStandard	103
103101503270249	15	1,960	Galvanized	zS	190	SupplierStandard	103

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101504070249	15	1,960	Bright	sZ	190	SupplierStandard	103
103101503070249	15	1,960	Bright	zS	190	SupplierStandard	103
103101504300249	15	2,160	Galvanized	sZ	207	SupplierStandard	103
103101503300249	15	2,160	Galvanized	zS	207	SupplierStandard	103
103101504100249	15	2,160	Bright	sZ	207	SupplierStandard	103
103101503100249	15	2,160	Bright	zS	207	SupplierStandard	103
103101604250249	16	1,770	Galvanized	sZ	195	SupplierStandard	117
103101603250249	16	1,770	Galvanized	zS	195	SupplierStandard	117
103101604050249	16	1,770	Bright	sZ	195	SupplierStandard	117
103101603050249	16	1,770	Bright	zS	195	SupplierStandard	117
103101604270249	16	1,960	Galvanized	sZ	216	SupplierStandard	117
103101603270249	16	1,960	Galvanized	zS	216	SupplierStandard	117
103101604070249	16	1,960	Bright	sZ	216	SupplierStandard	117
103101603070249	16	1,960	Bright	zS	216	SupplierStandard	117
103101604300249	16	2,160	Galvanized	sZ	235	SupplierStandard	117
103101603300249	16	2,160	Galvanized	zS	235	SupplierStandard	117
103101604100249	16	2,160	Bright	sZ	235	SupplierStandard	117
103101603100249	16	2,160	Bright	zS	235	SupplierStandard	117
103101704250249	17	1,770	Galvanized	sZ	220	SupplierStandard	132
103101703250249	17	1,770	Galvanized	zS	220	SupplierStandard	132
103101704050249	17	1,770	Bright	sZ	220	SupplierStandard	132
103101703050249	17	1,770	Bright	zS	220	SupplierStandard	132
103101704270249	17	1,960	Galvanized	sZ	244	SupplierStandard	132
103101703270249	17	1,960	Galvanized	zS	244	SupplierStandard	132
103101704070249	17	1,960	Bright	sZ	244	SupplierStandard	132
103101703070249	17	1,960	Bright	zS	244	SupplierStandard	132
103101704300249	17	2,160	Galvanized	sZ	266	SupplierStandard	132
103101703300249	17	2,160	Galvanized	zS	266	SupplierStandard	132
103101704100249	17	2,160	Bright	sZ	266	SupplierStandard	132
103101703100249	17	2,160	Bright	zS	266	SupplierStandard	132
103101804250249	18	1,770	Galvanized	sZ	247	SupplierStandard	148

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101803250249	18	1,770	Galvanized	zS	247	SupplierStandard	148
103101804050249	18	1,770	Bright	sZ	247	SupplierStandard	148
103101803050249	18	1,770	Bright	zS	247	SupplierStandard	148
103101804270249	18	1,960	Galvanized	sZ	274	SupplierStandard	148
103101803270249	18	1,960	Galvanized	zS	274	SupplierStandard	148
103101804070249	18	1,960	Bright	sZ	274	SupplierStandard	148
103101803070249	18	1,960	Bright	zS	274	SupplierStandard	148
103101804300249	18	2,160	Galvanized	sZ	298	SupplierStandard	148
103101803300249	18	2,160	Galvanized	zS	298	SupplierStandard	148
103101804100249	18	2,160	Bright	sZ	298	SupplierStandard	148
103101803100249	18	2,160	Bright	zS	298	SupplierStandard	148
103101904250249	19	1,770	Galvanized	sZ	275	SupplierStandard	165
103101903250249	19	1,770	Galvanized	zS	275	SupplierStandard	165
103101904050249	19	1,770	Bright	sZ	275	SupplierStandard	165
103101903050249	19	1,770	Bright	zS	275	SupplierStandard	165
103101904270249	19	1,960	Galvanized	sZ	305	SupplierStandard	165
103101903270249	19	1,960	Galvanized	zS	305	SupplierStandard	165
103101904070249	19	1,960	Bright	sZ	305	SupplierStandard	165
103101903070249	19	1,960	Bright	zS	305	SupplierStandard	165
103101904300249	19	2,160	Galvanized	sZ	332	SupplierStandard	165
103101903300249	19	2,160	Galvanized	zS	332	SupplierStandard	165
103101904100249	19	2,160	Bright	sZ	332	SupplierStandard	165
103101903100249	19	2,160	Bright	zS	332	SupplierStandard	165
103102004250249	20	1,770	Galvanized	sZ	305	SupplierStandard	182
103102003250249	20	1,770	Galvanized	zS	305	SupplierStandard	182
103102004050249	20	1,770	Bright	sZ	305	SupplierStandard	182
103102003050249	20	1,770	Bright	zS	305	SupplierStandard	182
103102004270249	20	1,960	Galvanized	sZ	338	SupplierStandard	182
103102003270249	20	1,960	Galvanized	zS	338	SupplierStandard	182
103102004070249	20	1,960	Bright	sZ	338	SupplierStandard	182
103102003070249	20	1,960	Bright	zS	338	SupplierStandard	182

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102004300249	20	2,160	Galvanized	sZ	369	SupplierStandard	182
103102003300249	20	2,160	Galvanized	zS	369	SupplierStandard	182
103102004100249	20	2,160	Bright	sZ	369	SupplierStandard	182
103102003100249	20	2,160	Bright	zS	369	SupplierStandard	182
103102104250249	21	1,770	Galvanized	sZ	336	SupplierStandard	201
103102103250249	21	1,770	Galvanized	zS	336	SupplierStandard	201
103102104050249	21	1,770	Bright	sZ	336	SupplierStandard	201
103102103050249	21	1,770	Bright	zS	336	SupplierStandard	201
103102104270249	21	1,960	Galvanized	sZ	372	SupplierStandard	201
103102103270249	21	1,960	Galvanized	zS	372	SupplierStandard	201
103102104070249	21	1,960	Bright	sZ	372	SupplierStandard	201
103102103070249	21	1,960	Bright	zS	372	SupplierStandard	201
103102104300249	21	2,160	Galvanized	sZ	405	SupplierStandard	201
103102103300249	21	2,160	Galvanized	zS	405	SupplierStandard	201
103102104100249	21	2,160	Bright	sZ	405	SupplierStandard	201
103102103100249	21	2,160	Bright	zS	405	SupplierStandard	201
103102204250249	22	1,770	Galvanized	sZ	369	SupplierStandard	221
103102203250249	22	1,770	Galvanized	zS	369	SupplierStandard	221
103102204050249	22	1,770	Bright	sZ	369	SupplierStandard	221
103102203050249	22	1,770	Bright	zS	369	SupplierStandard	221
103102204270249	22	1,960	Galvanized	sZ	408	SupplierStandard	221
103102203270249	22	1,960	Galvanized	zS	408	SupplierStandard	221
103102204070249	22	1,960	Bright	sZ	408	SupplierStandard	221
103102203070249	22	1,960	Bright	zS	408	SupplierStandard	221
103102204300249	22	2,160	Galvanized	sZ	445	SupplierStandard	221
103102203300249	22	2,160	Galvanized	zS	445	SupplierStandard	221
103102204100249	22	2,160	Bright	sZ	445	SupplierStandard	221
103102203100249	22	2,160	Bright	zS	445	SupplierStandard	221
103102304250249	23	1,770	Galvanized	sZ	403	SupplierStandard	241
103102303250249	23	1,770	Galvanized	zS	403	SupplierStandard	241
103102304050249	23	1,770	Bright	sZ	403	SupplierStandard	241

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102303050249	23	1,770	Bright	zS	403	SupplierStandard	241
103102304270249	23	1,960	Galvanized	sZ	446	SupplierStandard	241
103102303270249	23	1,960	Galvanized	zS	446	SupplierStandard	241
103102304070249	23	1,960	Bright	sZ	446	SupplierStandard	241
103102303070249	23	1,960	Bright	zS	446	SupplierStandard	241
103102304300249	23	2,160	Galvanized	sZ	486	SupplierStandard	241
103102303300249	23	2,160	Galvanized	zS	486	SupplierStandard	241
103102304100249	23	2,160	Bright	sZ	486	SupplierStandard	241
103102303100249	23	2,160	Bright	zS	486	SupplierStandard	241
103102404250249	24	1,770	Galvanized	sZ	439	SupplierStandard	263
103102403250249	24	1,770	Galvanized	zS	439	SupplierStandard	263
103102404050249	24	1,770	Bright	sZ	439	SupplierStandard	263
103102403050249	24	1,770	Bright	zS	439	SupplierStandard	263
103102404270249	24	1,960	Galvanized	sZ	486	SupplierStandard	263
103102403270249	24	1,960	Galvanized	zS	486	SupplierStandard	263
103102404070249	24	1,960	Bright	sZ	486	SupplierStandard	263
103102403070249	24	1,960	Bright	zS	486	SupplierStandard	263
103102404300249	24	2,160	Galvanized	sZ	530	SupplierStandard	263
103102403300249	24	2,160	Galvanized	zS	530	SupplierStandard	263
103102404100249	24	2,160	Bright	sZ	530	SupplierStandard	263
103102403100249	24	2,160	Bright	zS	530	SupplierStandard	263
103102504250249	25	1,770	Galvanized	sZ	176	SupplierStandard	285
103102503250249	25	1,770	Galvanized	zS	176	SupplierStandard	285
103102504050249	25	1,770	Bright	sZ	176	SupplierStandard	285
103102503050249	25	1,770	Bright	zS	176	SupplierStandard	285
103102504270249	25	1,960	Galvanized	sZ	528	SupplierStandard	285
103102503270249	25	1,960	Galvanized	zS	528	SupplierStandard	285
103102504070249	25	1,960	Bright	sZ	528	SupplierStandard	285
103102503070249	25	1,960	Bright	zS	528	SupplierStandard	285
103102504300249	25	2,160	Galvanized	sZ	574	SupplierStandard	285
103102503300249	25	2,160	Galvanized	zS	574	SupplierStandard	285

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102504100249	25	2,160	Bright	sZ	574	SupplierStandard	285
103102503100249	25	2,160	Bright	zS	574	SupplierStandard	285
103102604250249	26	1,770	Galvanized	sZ	515	SupplierStandard	308
103102603250249	26	1,770	Galvanized	zS	515	SupplierStandard	308
103102604050249	26	1,770	Bright	sZ	515	SupplierStandard	308
103102603050249	26	1,770	Bright	zS	515	SupplierStandard	308
103102604270249	26	1,960	Galvanized	sZ	570	SupplierStandard	308
103102603270249	26	1,960	Galvanized	zS	570	SupplierStandard	308
103102604070249	26	1,960	Bright	sZ	570	SupplierStandard	308
103102603070249	26	1,960	Bright	zS	570	SupplierStandard	308
103102604300249	26	2,160	Galvanized	sZ	621	SupplierStandard	308
103102603300249	26	2,160	Galvanized	zS	621	SupplierStandard	308
103102604100249	26	2,160	Bright	sZ	621	SupplierStandard	308
103102603100249	26	2,160	Bright	zS	621	SupplierStandard	308
103102704250249	27	1,770	Galvanized	sZ	555	SupplierStandard	333
103102703250249	27	1,770	Galvanized	zS	555	SupplierStandard	333
103102704050249	27	1,770	Bright	sZ	555	SupplierStandard	333
103102703050249	27	1,770	Bright	zS	555	SupplierStandard	333
103102704270249	27	1,960	Galvanized	sZ	615	SupplierStandard	333
103102703270249	27	1,960	Galvanized	zS	615	SupplierStandard	333
103102704070249	27	1,960	Bright	sZ	615	SupplierStandard	333
103102703070249	27	1,960	Bright	zS	615	SupplierStandard	333
103102704300249	27	2,160	Galvanized	sZ	670	SupplierStandard	333
103102703300249	27	2,160	Galvanized	zS	670	SupplierStandard	333
103102704100249	27	2,160	Bright	sZ	670	SupplierStandard	333
103102703100249	27	2,160	Bright	zS	670	SupplierStandard	333
103102804250249	28	1,770	Galvanized	sZ	515	SupplierStandard	358
103102803250249	28	1,770	Galvanized	zS	515	SupplierStandard	358
103102804050249	28	1,770	Bright	sZ	515	SupplierStandard	358
103102803050249	28	1,770	Bright	zS	515	SupplierStandard	358
103102804270249	28	1,960	Galvanized	sZ	662	SupplierStandard	358

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102803270249	28	1,960	Galvanized	zS	662	SupplierStandard	358
103102804070249	28	1,960	Bright	sZ	662	SupplierStandard	358
103102803070249	28	1,960	Bright	zS	662	SupplierStandard	358
103102804300249	28	2,160	Galvanized	sZ	720	SupplierStandard	358
103102803300249	28	2,160	Galvanized	zS	720	SupplierStandard	358
103102804100249	28	2,160	Bright	sZ	720	SupplierStandard	358
103102803100249	28	2,160	Bright	zS	720	SupplierStandard	358
103102904250249	29	1,770	Galvanized	sZ	641	SupplierStandard	384
103102903250249	29	1,770	Galvanized	zS	641	SupplierStandard	384
103102904050249	29	1,770	Bright	sZ	641	SupplierStandard	384
103102903050249	29	1,770	Bright	zS	641	SupplierStandard	384
103102904270249	29	1,960	Galvanized	sZ	710	SupplierStandard	384
103102903270249	29	1,960	Galvanized	zS	710	SupplierStandard	384
103102904070249	29	1,960	Bright	sZ	710	SupplierStandard	384
103102903070249	29	1,960	Bright	zS	710	SupplierStandard	384
103102904300249	29	2,160	Galvanized	sZ	773	SupplierStandard	384
103102903300249	29	2,160	Galvanized	zS	773	SupplierStandard	384
103102904100249	29	2,160	Bright	sZ	773	SupplierStandard	384
103102903100249	29	2,160	Bright	zS	773	SupplierStandard	384
103103004250249	30	1,770	Galvanized	sZ	686	SupplierStandard	411
103103003250249	30	1,770	Galvanized	zS	686	SupplierStandard	411
103103004050249	30	1,770	Bright	sZ	686	SupplierStandard	411
103103003050249	30	1,770	Bright	zS	686	SupplierStandard	411
103103004270249	30	1,960	Galvanized	sZ	759	SupplierStandard	411
103103003270249	30	1,960	Galvanized	zS	759	SupplierStandard	411
103103004070249	30	1,960	Bright	sZ	759	SupplierStandard	411
103103003070249	30	1,960	Bright	zS	759	SupplierStandard	411
103103004300249	30	2,160	Galvanized	sZ	827	SupplierStandard	411
103103003300249	30	2,160	Galvanized	zS	827	SupplierStandard	411
103103004100249	30	2,160	Bright	sZ	827	SupplierStandard	411
103103003100249	30	2,160	Bright	zS	827	SupplierStandard	411

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103104250249	31	1,770	Galvanized	sZ	732	SupplierStandard	438
103103103250249	31	1,770	Galvanized	zS	732	SupplierStandard	438
103103104050249	31	1,770	Bright	sZ	732	SupplierStandard	438
103103103050249	31	1,770	Bright	zS	732	SupplierStandard	438
103103104270249	31	1,960	Galvanized	sZ	811	SupplierStandard	438
103103103270249	31	1,960	Galvanized	zS	811	SupplierStandard	438
103103104070249	31	1,960	Bright	sZ	811	SupplierStandard	438
103103103070249	31	1,960	Bright	zS	811	SupplierStandard	438
103103104300249	31	2,160	Galvanized	sZ	883	SupplierStandard	438
103103103300249	31	2,160	Galvanized	zS	883	SupplierStandard	438
103103104100249	31	2,160	Bright	sZ	883	SupplierStandard	438
103103103100249	31	2,160	Bright	zS	883	SupplierStandard	438
103103204250249	32	1,770	Galvanized	sZ	780	SupplierStandard	467
103103203250249	32	1,770	Galvanized	zS	780	SupplierStandard	467
103103204050249	32	1,770	Bright	sZ	780	SupplierStandard	467
103103203050249	32	1,770	Bright	zS	780	SupplierStandard	467
103103204270249	32	1,960	Galvanized	sZ	864	SupplierStandard	467
103103203270249	32	1,960	Galvanized	zS	864	SupplierStandard	467
103103204070249	32	1,960	Bright	sZ	864	SupplierStandard	467
103103203070249	32	1,960	Bright	zS	864	SupplierStandard	467
103103204300249	32	2,160	Galvanized	sZ	941	SupplierStandard	467
103103203300249	32	2,160	Galvanized	zS	941	SupplierStandard	467
103103204100249	32	2,160	Bright	sZ	941	SupplierStandard	467
103103203100249	32	2,160	Bright	zS	941	SupplierStandard	467
103103304250249	33	1,770	Galvanized	sZ	830	SupplierStandard	497
103103303250249	33	1,770	Galvanized	zS	830	SupplierStandard	497
103103304050249	33	1,770	Bright	sZ	830	SupplierStandard	497
103103303050249	33	1,770	Bright	zS	830	SupplierStandard	497
103103304270249	33	1,960	Galvanized	sZ	919	SupplierStandard	497
103103303270249	33	1,960	Galvanized	zS	919	SupplierStandard	497
103103304070249	33	1,960	Bright	sZ	919	SupplierStandard	497

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103303070249	33	1,960	Bright	zS	919	SupplierStandard	497
103103304300249	33	2,160	Galvanized	sZ	1,001	SupplierStandard	497
103103303300249	33	2,160	Galvanized	zS	1,001	SupplierStandard	497
103103304100249	33	2,160	Bright	sZ	1,001	SupplierStandard	497
103103303100249	33	2,160	Bright	zS	1,001	SupplierStandard	497
103103404250249	34	1,770	Galvanized	sZ	881	SupplierStandard	527
103103403250249	34	1,770	Galvanized	zS	881	SupplierStandard	527
103103404050249	34	1,770	Bright	sZ	881	SupplierStandard	527
103103403050249	34	1,770	Bright	zS	881	SupplierStandard	527
103103404270249	34	1,960	Galvanized	sZ	975	SupplierStandard	527
103103403270249	34	1,960	Galvanized	zS	975	SupplierStandard	527
103103404070249	34	1,960	Bright	sZ	975	SupplierStandard	527
103103403070249	34	1,960	Bright	zS	975	SupplierStandard	527
103103404300249	34	2,160	Galvanized	sZ	1,062	SupplierStandard	527
103103403300249	34	2,160	Galvanized	zS	1,062	SupplierStandard	527
103103404100249	34	2,160	Bright	sZ	1,062	SupplierStandard	527
103103403100249	34	2,160	Bright	zS	1,062	SupplierStandard	527
103103504250249	35	1,770	Galvanized	sZ	933	SupplierStandard	559
103103503250249	35	1,770	Galvanized	zS	933	SupplierStandard	559
103103504050249	35	1,770	Bright	sZ	933	SupplierStandard	559
103103503050249	35	1,770	Bright	zS	933	SupplierStandard	559
103103504270249	35	1,960	Galvanized	sZ	1,034	SupplierStandard	559
103103503270249	35	1,960	Galvanized	zS	1,034	SupplierStandard	559
103103504070249	35	1,960	Bright	sZ	1,034	SupplierStandard	559
103103503070249	35	1,960	Bright	zS	1,034	SupplierStandard	559
103103504300249	35	2,160	Galvanized	sZ	1,125	SupplierStandard	559
103103503300249	35	2,160	Galvanized	zS	1,125	SupplierStandard	559
103103504100249	35	2,160	Bright	sZ	1,125	SupplierStandard	559
103103503100249	35	2,160	Bright	zS	1,125	SupplierStandard	559
103103604250249	36	1,770	Galvanized	sZ	988	SupplierStandard	591
103103603250249	36	1,770	Galvanized	zS	988	SupplierStandard	591

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103604050249	36	1,770	Bright	sZ	988	SupplierStandard	591
103103603050249	36	1,770	Bright	zS	988	SupplierStandard	591
103103604270249	36	1,960	Galvanized	sZ	1,094	SupplierStandard	591
103103603270249	36	1,960	Galvanized	zS	1,094	SupplierStandard	591
103103604070249	36	1,960	Bright	sZ	1,094	SupplierStandard	591
103103603070249	36	1,960	Bright	zS	1,094	SupplierStandard	591
103103604300249	36	2,160	Galvanized	sZ	1,191	SupplierStandard	591
103103603300249	36	2,160	Galvanized	zS	1,191	SupplierStandard	591
103103604100249	36	2,160	Bright	sZ	1,191	SupplierStandard	591
103103603100249	36	2,160	Bright	zS	1,191	SupplierStandard	591
103103704250249	37	1,770	Galvanized	sZ	1,043	SupplierStandard	625
103103703250249	37	1,770	Galvanized	zS	1,043	SupplierStandard	625
103103704050249	37	1,770	Bright	sZ	1,043	SupplierStandard	625
103103703050249	37	1,770	Bright	zS	1,043	SupplierStandard	625
103103704270249	37	1,960	Galvanized	sZ	1,155	SupplierStandard	625
103103703270249	37	1,960	Galvanized	zS	1,155	SupplierStandard	625
103103704070249	37	1,960	Bright	sZ	1,155	SupplierStandard	625
103103703070249	37	1,960	Bright	zS	1,155	SupplierStandard	625
103103704300249	37	2,160	Galvanized	sZ	1,258	SupplierStandard	625
103103703300249	37	2,160	Galvanized	zS	1,258	SupplierStandard	625
103103704100249	37	2,160	Bright	sZ	1,258	SupplierStandard	625
103103703100249	37	2,160	Bright	zS	1,258	SupplierStandard	625
103103804250249	38	1,770	Galvanized	sZ	1,100	SupplierStandard	659
103103803250249	38	1,770	Galvanized	zS	1,100	SupplierStandard	659
103103804050249	38	1,770	Bright	sZ	1,100	SupplierStandard	659
103103803050249	38	1,770	Bright	zS	1,100	SupplierStandard	659
103103804270249	38	1,960	Galvanized	sZ	1,219	SupplierStandard	659
103103803270249	38	1,960	Galvanized	zS	1,219	SupplierStandard	659
103103804070249	38	1,960	Bright	sZ	1,219	SupplierStandard	659
103103803070249	38	1,960	Bright	zS	1,219	SupplierStandard	659
103103804300249	38	2,160	Galvanized	sZ	1,327	SupplierStandard	659

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103803300249	38	2,160	Galvanized	zS	1,327	SupplierStandard	659
103103804100249	38	2,160	Bright	sZ	1,327	SupplierStandard	659
103103803100249	38	2,160	Bright	zS	1,327	SupplierStandard	659
103103904250249	39	1,770	Galvanized	sZ	1,159	SupplierStandard	694
103103903250249	39	1,770	Galvanized	zS	1,159	SupplierStandard	694
103103904050249	39	1,770	Bright	sZ	1,159	SupplierStandard	694
103103903050249	39	1,770	Bright	zS	1,159	SupplierStandard	694
103103904270249	39	1,960	Galvanized	sZ	1,284	SupplierStandard	694
103103903270249	39	1,960	Galvanized	zS	1,284	SupplierStandard	694
103103904070249	39	1,960	Bright	sZ	1,284	SupplierStandard	694
103103903070249	39	1,960	Bright	zS	1,284	SupplierStandard	694
103103904300249	39	2,160	Galvanized	sZ	1,398	SupplierStandard	694
103103903300249	39	2,160	Galvanized	zS	1,398	SupplierStandard	694
103103904100249	39	2,160	Bright	sZ	1,398	SupplierStandard	694
103103903100249	39	2,160	Bright	zS	1,398	SupplierStandard	694
103104004250249	40	1,770	Galvanized	sZ	1,220	SupplierStandard	730
103104003250249	40	1,770	Galvanized	zS	1,220	SupplierStandard	730
103104004050249	40	1,770	Bright	sZ	1,220	SupplierStandard	730
103104003050249	40	1,770	Bright	zS	1,220	SupplierStandard	730
103104004270249	40	1,960	Galvanized	sZ	1,350	SupplierStandard	730
103104003270249	40	1,960	Galvanized	zS	1,350	SupplierStandard	730
103104004070249	40	1,960	Bright	sZ	1,350	SupplierStandard	730
103104003070249	40	1,960	Bright	zS	1,350	SupplierStandard	730
103104004300249	40	2,160	Galvanized	sZ	1,470	SupplierStandard	730
103104003300249	40	2,160	Galvanized	zS	1,470	SupplierStandard	730
103104004100249	40	2,160	Bright	sZ	1,470	SupplierStandard	730
103104003100249	40	2,160	Bright	zS	1,470	SupplierStandard	730
103104104250249	41	1,770	Galvanized	sZ	1,281	SupplierStandard	767
103104103250249	41	1,770	Galvanized	zS	1,281	SupplierStandard	767
103104104050249	41	1,770	Bright	sZ	1,281	SupplierStandard	767
103104103050249	41	1,770	Bright	zS	1,281	SupplierStandard	767

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104104270249	41	1,960	Galvanized	sZ	1,419	SupplierStandard	767
103104103270249	41	1,960	Galvanized	zS	1,419	SupplierStandard	767
103104104070249	41	1,960	Bright	sZ	1,419	SupplierStandard	767
103104103070249	41	1,960	Bright	zS	1,419	SupplierStandard	767
103104104300249	41	2,160	Galvanized	sZ	1,545	SupplierStandard	767
103104103300249	41	2,160	Galvanized	zS	1,545	SupplierStandard	767
103104104100249	41	2,160	Bright	sZ	1,545	SupplierStandard	767
103104103100249	41	2,160	Bright	zS	1,545	SupplierStandard	767
103104204250249	42	1,770	Galvanized	sZ	1,344	SupplierStandard	805
103104203250249	42	1,770	Galvanized	zS	1,344	SupplierStandard	805
103104204050249	42	1,770	Bright	sZ	1,344	SupplierStandard	805
103104203050249	42	1,770	Bright	zS	1,344	SupplierStandard	805
103104204270249	42	1,960	Galvanized	sZ	1,488	SupplierStandard	805
103104203270249	42	1,960	Galvanized	zS	1,488	SupplierStandard	805
103104204070249	42	1,960	Bright	sZ	1,488	SupplierStandard	805
103104203070249	42	1,960	Bright	zS	1,488	SupplierStandard	805
103104204300249	42	2,160	Galvanized	sZ	1,621	SupplierStandard	805
103104203300249	42	2,160	Galvanized	zS	1,621	SupplierStandard	805
103104204100249	42	2,160	Bright	sZ	1,621	SupplierStandard	805
103104203100249	42	2,160	Bright	zS	1,621	SupplierStandard	805
103104404250249	44	1,770	Galvanized	sZ	1,475	SupplierStandard	883
103104403250249	44	1,770	Galvanized	zS	1,475	SupplierStandard	883
103104404050249	44	1,770	Bright	sZ	1,475	SupplierStandard	883
103104403050249	44	1,770	Bright	zS	1,475	SupplierStandard	883
103104404270249	44	1,960	Galvanized	sZ	1,634	SupplierStandard	883
103104403270249	44	1,960	Galvanized	zS	1,634	SupplierStandard	883
103104404070249	44	1,960	Bright	sZ	1,634	SupplierStandard	883
103104403070249	44	1,960	Bright	zS	1,634	SupplierStandard	883
103104404300249	44	2,160	Galvanized	sZ	1,779	SupplierStandard	883
103104403300249	44	2,160	Galvanized	zS	1,779	SupplierStandard	883
103104404100249	44	2,160	Bright	sZ	1,779	SupplierStandard	883

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104403100249	44	2,160	Bright	zS	1,779	SupplierStandard	883
103104504250249	45	1,770	Galvanized	sZ	1,543	SupplierStandard	924
103104503250249	45	1,770	Galvanized	zS	1,543	SupplierStandard	924
103104504050249	45	1,770	Bright	sZ	1,543	SupplierStandard	924
103104503050249	45	1,770	Bright	zS	1,543	SupplierStandard	924
103104504270249	45	1,960	Galvanized	sZ	1,709	SupplierStandard	924
103104503270249	45	1,960	Galvanized	zS	1,709	SupplierStandard	924
103104504070249	45	1,960	Bright	sZ	1,709	SupplierStandard	924
103104503070249	45	1,960	Bright	zS	1,709	SupplierStandard	924
103104504300249	45	2,160	Galvanized	sZ	1,861	SupplierStandard	924
103104503300249	45	2,160	Galvanized	zS	1,861	SupplierStandard	924
103104504100249	45	2,160	Bright	sZ	1,861	SupplierStandard	924
103104503100249	45	2,160	Bright	zS	1,861	SupplierStandard	924
103104604250249	46	1,770	Galvanized	sZ	1,613	SupplierStandard	965
103104603250249	46	1,770	Galvanized	zS	1,613	SupplierStandard	965
103104604050249	46	1,770	Bright	sZ	1,613	SupplierStandard	965
103104603050249	46	1,770	Bright	zS	1,613	SupplierStandard	965
103104604270249	46	1,960	Galvanized	sZ	1,786	SupplierStandard	965
103104603270249	46	1,960	Galvanized	zS	1,786	SupplierStandard	965
103104604070249	46	1,960	Bright	sZ	1,786	SupplierStandard	965
103104603070249	46	1,960	Bright	zS	1,786	SupplierStandard	965
103104604300249	46	2,160	Galvanized	sZ	1,945	SupplierStandard	965
103104603300249	46	2,160	Galvanized	zS	1,945	SupplierStandard	965
103104604100249	46	2,160	Bright	sZ	1,945	SupplierStandard	965
103104603100249	46	2,160	Bright	zS	1,945	SupplierStandard	965
103104704250249	47	1,770	Galvanized	sZ	1,683	SupplierStandard	1,008
103104703250249	47	1,770	Galvanized	zS	1,683	SupplierStandard	1,008
103104704050249	47	1,770	Bright	sZ	1,683	SupplierStandard	1,008
103104703050249	47	1,770	Bright	zS	1,683	SupplierStandard	1,008
103104704270249	47	1,960	Galvanized	sZ	1,864	SupplierStandard	1,008
103104703270249	47	1,960	Galvanized	zS	1,864	SupplierStandard	1,008

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104704070249	47	1,960	Bright	sZ	1,864	SupplierStandard	1,008
103104703070249	47	1,960	Bright	zS	1,864	SupplierStandard	1,008
103104704300249	47	2,160	Galvanized	sZ	2,030	SupplierStandard	1,008
103104703300249	47	2,160	Galvanized	zS	2,030	SupplierStandard	1,008
103104704100249	47	2,160	Bright	sZ	2,030	SupplierStandard	1,008
103104703100249	47	2,160	Bright	zS	2,030	SupplierStandard	1,008
103104804250249	48	1,770	Galvanized	sZ	1,756	SupplierStandard	1,051
103104803250249	48	1,770	Galvanized	zS	1,756	SupplierStandard	1,051
103104804050249	48	1,770	Bright	sZ	1,756	SupplierStandard	1,051
103104803050249	48	1,770	Bright	zS	1,756	SupplierStandard	1,051
103104804270249	48	1,960	Galvanized	sZ	1,945	SupplierStandard	1,051
103104803270249	48	1,960	Galvanized	zS	1,945	SupplierStandard	1,051
103104804070249	48	1,960	Bright	sZ	1,945	SupplierStandard	1,051
103104803070249	48	1,960	Bright	zS	1,945	SupplierStandard	1,051
103104804300249	48	2,160	Galvanized	sZ	2,117	SupplierStandard	1,051
103104803300249	48	2,160	Galvanized	zS	2,117	SupplierStandard	1,051
103104804100249	48	2,160	Bright	sZ	2,117	SupplierStandard	1,051
103104803100249	48	2,160	Bright	zS	2,117	SupplierStandard	1,051
103104904250249	49	1,770	Galvanized	sZ	1,830	SupplierStandard	1,095
103104903250249	49	1,770	Galvanized	zS	1,830	SupplierStandard	1,095
103104904050249	49	1,770	Bright	sZ	1,830	SupplierStandard	1,095
103104903050249	49	1,770	Bright	zS	1,830	SupplierStandard	1,095
103104904270249	49	1,960	Galvanized	sZ	2,026	SupplierStandard	1,095
103104903270249	49	1,960	Galvanized	zS	2,026	SupplierStandard	1,095
103104904070249	49	1,960	Bright	sZ	2,026	SupplierStandard	1,095
103104903070249	49	1,960	Bright	zS	2,026	SupplierStandard	1,095
103104904300249	49	2,160	Galvanized	sZ	2,206	SupplierStandard	1,095
103104903300249	49	2,160	Galvanized	zS	2,206	SupplierStandard	1,095
103104904100249	49	2,160	Bright	sZ	2,206	SupplierStandard	1,095
103104903100249	49	2,160	Bright	zS	2,206	SupplierStandard	1,095
103105004250249	50	1,770	Galvanized	sZ	1,905	SupplierStandard	1,140

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105003250249	50	1,770	Galvanized	zS	1,905	SupplierStandard	1,140
103105004050249	50	1,770	Bright	sZ	1,905	SupplierStandard	1,140
103105003050249	50	1,770	Bright	zS	1,905	SupplierStandard	1,140
103105004270249	50	1,960	Galvanized	sZ	2,110	SupplierStandard	1,140
103105003270249	50	1,960	Galvanized	zS	2,110	SupplierStandard	1,140
103105004070249	50	1,960	Bright	sZ	2,110	SupplierStandard	1,140
103105003070249	50	1,960	Bright	zS	2,110	SupplierStandard	1,140
103105004300249	50	2,160	Galvanized	sZ	2,297	SupplierStandard	1,140
103105003300249	50	2,160	Galvanized	zS	2,297	SupplierStandard	1,140
103105004100249	50	2,160	Bright	sZ	2,297	SupplierStandard	1,140
103105003100249	50	2,160	Bright	zS	2,297	SupplierStandard	1,140
103105104250249	51	1,770	Galvanized	sZ	1,982	SupplierStandard	1,187
103105103250249	51	1,770	Galvanized	zS	1,982	SupplierStandard	1,187
103105104050249	51	1,770	Bright	sZ	1,982	SupplierStandard	1,187
103105103050249	51	1,770	Bright	zS	1,982	SupplierStandard	1,187
103105104270249	51	1,960	Galvanized	sZ	2,195	SupplierStandard	1,187
103105103270249	51	1,960	Galvanized	zS	2,195	SupplierStandard	1,187
103105104070249	51	1,960	Bright	sZ	2,195	SupplierStandard	1,187
103105103070249	51	1,960	Bright	zS	2,195	SupplierStandard	1,187
103105104300249	51	2,160	Galvanized	sZ	2,390	SupplierStandard	1,187
103105103300249	51	2,160	Galvanized	zS	2,390	SupplierStandard	1,187
103105104100249	51	2,160	Bright	sZ	2,390	SupplierStandard	1,187
103105103100249	51	2,160	Bright	zS	2,390	SupplierStandard	1,187
103105204250249	52	1,770	Galvanized	sZ	2,061	SupplierStandard	1,233
103105203250249	52	1,770	Galvanized	zS	2,061	SupplierStandard	1,233
103105204050249	52	1,770	Bright	sZ	2,061	SupplierStandard	1,233
103105203050249	52	1,770	Bright	zS	2,061	SupplierStandard	1,233
103105204270249	52	1,960	Galvanized	sZ	2,281	SupplierStandard	1,233
103105203270249	52	1,960	Galvanized	zS	2,281	SupplierStandard	1,233
103105204070249	52	1,960	Bright	sZ	2,281	SupplierStandard	1,233
103105203070249	52	1,960	Bright	zS	2,281	SupplierStandard	1,233

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105204300249	52	2,160	Galvanized	sZ	2,485	SupplierStandard	1,233
103105203300249	52	2,160	Galvanized	zS	2,485	SupplierStandard	1,233
103105204100249	52	2,160	Bright	sZ	2,485	SupplierStandard	1,233
103105203100249	52	2,160	Bright	zS	2,485	SupplierStandard	1,233
103105304250249	53	1,770	Galvanized	sZ	2,140	SupplierStandard	1,281
103105303250249	53	1,770	Galvanized	zS	2,140	SupplierStandard	1,281
103105304050249	53	1,770	Bright	sZ	2,140	SupplierStandard	1,281
103105303050249	53	1,770	Bright	zS	2,140	SupplierStandard	1,281
103105304270249	53	1,960	Galvanized	sZ	2,370	SupplierStandard	1,281
103105303270249	53	1,960	Galvanized	zS	2,370	SupplierStandard	1,281
103105304070249	53	1,960	Bright	sZ	2,370	SupplierStandard	1,281
103105303070249	53	1,960	Bright	zS	2,370	SupplierStandard	1,281
103105304300249	53	2,160	Galvanized	sZ	2,581	SupplierStandard	1,281
103105303300249	53	2,160	Galvanized	zS	2,581	SupplierStandard	1,281
103105304100249	53	2,160	Bright	sZ	2,581	SupplierStandard	1,281
103105303100249	53	2,160	Bright	zS	2,581	SupplierStandard	1,281
103105404250249	54	1,770	Galvanized	sZ	2,222	SupplierStandard	1,330
103105403250249	54	1,770	Galvanized	zS	2,222	SupplierStandard	1,330
103105404050249	54	1,770	Bright	sZ	2,222	SupplierStandard	1,330
103105403050249	54	1,770	Bright	zS	2,222	SupplierStandard	1,330
103105404270249	54	1,960	Galvanized	sZ	2,460	SupplierStandard	1,330
103105403270249	54	1,960	Galvanized	zS	2,460	SupplierStandard	1,330
103105404070249	54	1,960	Bright	sZ	2,460	SupplierStandard	1,330
103105403070249	54	1,960	Bright	zS	2,460	SupplierStandard	1,330
103105404300249	54	2,160	Galvanized	sZ	2,679	SupplierStandard	1,330
103105403300249	54	2,160	Galvanized	zS	2,679	SupplierStandard	1,330
103105404100249	54	2,160	Bright	sZ	2,679	SupplierStandard	1,330
103105403100249	54	2,160	Bright	zS	2,679	SupplierStandard	1,330
103105504250249	55	1,770	Galvanized	sZ	2,305	SupplierStandard	1,380
103105503250249	55	1,770	Galvanized	zS	2,305	SupplierStandard	1,380
103105504050249	55	1,770	Bright	sZ	2,305	SupplierStandard	1,380

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105503050249	55	1,770	Bright	zS	2,305	SupplierStandard	1,380
103105504270249	55	1,960	Galvanized	sZ	2,553	SupplierStandard	1,380
103105503270249	55	1,960	Galvanized	zS	2,553	SupplierStandard	1,380
103105504070249	55	1,960	Bright	sZ	2,553	SupplierStandard	1,380
103105503070249	55	1,960	Bright	zS	2,553	SupplierStandard	1,380
103105504300249	55	2,160	Galvanized	sZ	2,780	SupplierStandard	1,380
103105503300249	55	2,160	Galvanized	zS	2,780	SupplierStandard	1,380
103105504100249	55	2,160	Bright	sZ	2,780	SupplierStandard	1,380
103105503100249	55	2,160	Bright	zS	2,780	SupplierStandard	1,380
103105604250249	56	1,770	Galvanized	sZ	2,390	SupplierStandard	1,431
103105603250249	56	1,770	Galvanized	zS	2,390	SupplierStandard	1,431
103105604050249	56	1,770	Bright	sZ	2,390	SupplierStandard	1,431
103105603050249	56	1,770	Bright	zS	2,390	SupplierStandard	1,431
103105604270249	56	1,960	Galvanized	sZ	2,647	SupplierStandard	1,431
103105603270249	56	1,960	Galvanized	zS	2,647	SupplierStandard	1,431
103105604070249	56	1,960	Bright	sZ	2,647	SupplierStandard	1,431
103105603070249	56	1,960	Bright	zS	2,647	SupplierStandard	1,431
103105604300249	56	2,160	Galvanized	sZ	2,882	SupplierStandard	1,431
103105603300249	56	2,160	Galvanized	zS	2,882	SupplierStandard	1,431
103105604100249	56	2,160	Bright	sZ	2,882	SupplierStandard	1,431
103105603100249	56	2,160	Bright	zS	2,882	SupplierStandard	1,431
103105704250249	57	1,770	Galvanized	sZ	2,476	SupplierStandard	1,482
103105703250249	57	1,770	Galvanized	zS	2,476	SupplierStandard	1,482
103105704050249	57	1,770	Bright	sZ	2,476	SupplierStandard	1,482
103105703050249	57	1,770	Bright	zS	2,476	SupplierStandard	1,482
103105704270249	57	1,960	Galvanized	sZ	2,742	SupplierStandard	1,482
103105703270249	57	1,960	Galvanized	zS	2,742	SupplierStandard	1,482
103105704070249	57	1,960	Bright	sZ	2,742	SupplierStandard	1,482
103105703070249	57	1,960	Bright	zS	2,742	SupplierStandard	1,482
103105704300249	57	2,160	Galvanized	sZ	2,986	SupplierStandard	1,482
103105703300249	57	2,160	Galvanized	zS	2,986	SupplierStandard	1,482

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105704100249	57	2,160	Bright	sZ	2,986	SupplierStandard	1,482
103105703100249	57	2,160	Bright	zS	2,986	SupplierStandard	1,482
103105804250249	58	1,770	Galvanized	sZ	2,584	SupplierStandard	1,535
103105803250249	58	1,770	Galvanized	zS	2,584	SupplierStandard	1,535
103105804050249	58	1,770	Bright	sZ	2,584	SupplierStandard	1,535
103105803050249	58	1,770	Bright	zS	2,584	SupplierStandard	1,535
103105804270249	58	1,960	Galvanized	sZ	2,838	SupplierStandard	1,535
103105803270249	58	1,960	Galvanized	zS	2,838	SupplierStandard	1,535
103105804070249	58	1,960	Bright	sZ	2,838	SupplierStandard	1,535
103105803070249	58	1,960	Bright	zS	2,838	SupplierStandard	1,535
103105804300249	58	2,160	Galvanized	sZ	3,091	SupplierStandard	1,535
103105803300249	58	2,160	Galvanized	zS	3,091	SupplierStandard	1,535
103105804100249	58	2,160	Bright	sZ	3,091	SupplierStandard	1,535
103105803100249	58	2,160	Bright	zS	3,091	SupplierStandard	1,535
103105904250249	59	1,770	Galvanized	sZ	2,653	SupplierStandard	1,588
103105903250249	59	1,770	Galvanized	zS	2,653	SupplierStandard	1,588
103105904050249	59	1,770	Bright	sZ	2,653	SupplierStandard	1,588
103105903050249	59	1,770	Bright	zS	2,653	SupplierStandard	1,588
103105904270249	59	1,960	Galvanized	sZ	2,937	SupplierStandard	1,588
103105903270249	59	1,960	Galvanized	zS	2,937	SupplierStandard	1,588
103105904070249	59	1,960	Bright	sZ	2,937	SupplierStandard	1,588
103105903070249	59	1,960	Bright	zS	2,937	SupplierStandard	1,588
103105904300249	59	2,160	Galvanized	sZ	3,199	SupplierStandard	1,588
103105903300249	59	2,160	Galvanized	zS	3,199	SupplierStandard	1,588
103105904100249	59	2,160	Bright	sZ	3,199	SupplierStandard	1,588
103105903100249	59	2,160	Bright	zS	3,199	SupplierStandard	1,588
103106004250249	60	1,770	Galvanized	sZ	2,743	SupplierStandard	1,642
103106003250249	60	1,770	Galvanized	zS	2,743	SupplierStandard	1,642
103106004050249	60	1,770	Bright	sZ	2,743	SupplierStandard	1,642
103106003050249	60	1,770	Bright	zS	2,743	SupplierStandard	1,642
103106004270249	60	1,960	Galvanized	sZ	3,038	SupplierStandard	1,642

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa PZ299

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106003270249	60	1,960	Galvanized	zS	3,038	SupplierStandard	1,642
103106004070249	60	1,960	Bright	sZ	3,038	SupplierStandard	1,642
103106003070249	60	1,960	Bright	zS	3,038	SupplierStandard	1,642
103106004300249	60	2,160	Galvanized	sZ	3,308	SupplierStandard	1,642
103106003300249	60	2,160	Galvanized	zS	3,308	SupplierStandard	1,642
103106004100249	60	2,160	Bright	sZ	3,308	SupplierStandard	1,642
103106003100249	60	2,160	Bright	zS	3,308	SupplierStandard	1,642

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved