
CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Product information

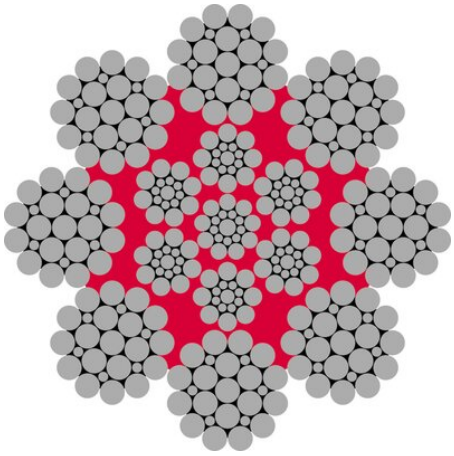

Diepa X43 is a non-rotation resistant, 8 strand wire rope with platsic insert.

Applications: For all different types of cranes where rotation resistant steel wire rope is not required, for example overhead travel cranes, floating dredges, mill's work cranes. For single-layer coiling on the drum.

Lay: Ordinary lay with internal plastic component.
Total number of wires: 4-14mm 201, 15-49mm 321, 50-69mm 409, 70-100mm 580.
ISO 4309 Rope Category No: 4-49mm **RCN.06**, 50-100mm **RCN.13**

... *Read more*

Marking: According to standard
Finish: Galvanized or bright.
Standard: EN 12385-4
Warning: Not to be used with a swivel.

Fill factor: 0.6226
RCN: 06

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100404250259	4	1,770	Galvanized	sZ	11.7	SupplierStandard	7
103100403250259	4	1,770	Galvanized	zS	11.7	SupplierStandard	7
103100404050259	4	1,770	Bright	sZ	11.7	SupplierStandard	7
103100403050259	4	1,770	Bright	zS	11.7	SupplierStandard	7
103100404270259	4	1,960	Galvanized	sZ	13	SupplierStandard	7
103100403270259	4	1,960	Galvanized	zS	13	SupplierStandard	7
103100404070259	4	1,960	Bright	sZ	13	SupplierStandard	7
103100403070259	4	1,960	Bright	zS	13	SupplierStandard	7
103100404300259	4	2,160	Galvanized	sZ	14.1	SupplierStandard	7
103100403300259	4	2,160	Galvanized	zS	14.1	SupplierStandard	7
103100404100259	4	2,160	Bright	sZ	14.1	SupplierStandard	7
103100403100259	4	2,160	Bright	zS	14.1	SupplierStandard	7
103100504250259	5	1,770	Galvanized	sZ	18.3	SupplierStandard	11
103100503250259	5	1,770	Galvanized	zS	18.3	SupplierStandard	11
103100504050259	5	1,770	Bright	sZ	18.3	SupplierStandard	11
103100503050259	5	1,770	Bright	zS	18.3	SupplierStandard	11
103100504270259	5	1,960	Galvanized	sZ	20.2	SupplierStandard	11
103100503270259	5	1,960	Galvanized	zS	20.2	SupplierStandard	11
103100504070259	5	1,960	Bright	sZ	20.2	SupplierStandard	11
103100503070259	5	1,960	Bright	zS	20.2	SupplierStandard	11
103100504300259	5	2,160	Galvanized	sZ	22	SupplierStandard	11
103100503300259	5	2,160	Galvanized	zS	22	SupplierStandard	11
103100504100259	5	2,160	Bright	sZ	22	SupplierStandard	11
103100503100259	5	2,160	Bright	zS	22	SupplierStandard	11
103100604250259	6	1,770	Galvanized	sZ	26.3	SupplierStandard	16
103100603250259	6	1,770	Galvanized	zS	26.3	SupplierStandard	16
103100604050259	6	1,770	Bright	sZ	26.3	SupplierStandard	16
103100603050259	6	1,770	Bright	zS	26.3	SupplierStandard	16
103100604270259	6	1,960	Galvanized	sZ	29.2	SupplierStandard	16
103100603270259	6	1,960	Galvanized	zS	29.2	SupplierStandard	16
103100604070259	6	1,960	Bright	sZ	29.2	SupplierStandard	16

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100603070259	6	1,960	Bright	zS	29.2	SupplierStandard	16
103100604300259	6	2,160	Galvanized	sZ	31.7	SupplierStandard	16
103100603300259	6	2,160	Galvanized	zS	31.7	SupplierStandard	16
103100604100259	6	2,160	Bright	sZ	31.7	SupplierStandard	16
103100603100259	6	2,160	Bright	zS	31.7	SupplierStandard	16
103100654250259	6.5	1,770	Galvanized	sZ	30.9	SupplierStandard	19
103100653250259	6.5	1,770	Galvanized	zS	30.9	SupplierStandard	19
103100654050259	6.5	1,770	Bright	sZ	30.9	SupplierStandard	19
103100653050259	6.5	1,770	Bright	zS	30.9	SupplierStandard	19
103100654270259	6.5	1,960	Galvanized	sZ	34.2	SupplierStandard	19
103100653270259	6.5	1,960	Galvanized	zS	34.2	SupplierStandard	19
103100654070259	6.5	1,960	Bright	sZ	34.2	SupplierStandard	19
103100653070259	6.5	1,960	Bright	zS	34.2	SupplierStandard	19
103100654300259	6.5	2,160	Galvanized	sZ	37.3	SupplierStandard	19
103100653300259	6.5	2,160	Galvanized	zS	37.3	SupplierStandard	19
103100654100259	6.5	2,160	Bright	sZ	37.3	SupplierStandard	19
103100653100259	6.5	2,160	Bright	zS	37.3	SupplierStandard	19
103100704250259	7	1,770	Galvanized	sZ	35.8	SupplierStandard	22
103100703250259	7	1,770	Galvanized	zS	35.8	SupplierStandard	22
103100704050259	7	1,770	Bright	sZ	35.8	SupplierStandard	22
103100703050259	7	1,770	Bright	zS	35.8	SupplierStandard	22
103100704270259	7	1,960	Galvanized	sZ	39.7	SupplierStandard	22
103100703270259	7	1,960	Galvanized	zS	39.7	SupplierStandard	22
103100704070259	7	1,960	Bright	sZ	39.7	SupplierStandard	22
103100703070259	7	1,960	Bright	zS	39.7	SupplierStandard	22
103100704300259	7	2,160	Galvanized	sZ	43.2	SupplierStandard	22
103100703300259	7	2,160	Galvanized	zS	43.2	SupplierStandard	22
103100704100259	7	2,160	Bright	sZ	43.2	SupplierStandard	22
103100703100259	7	2,160	Bright	zS	43.2	SupplierStandard	22
103100754250259	7.5	1,770	Galvanized	sZ	41.1	SupplierStandard	25
103100753250259	7.5	1,770	Galvanized	zS	41.1	SupplierStandard	25

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100754050259	7.5	1,770	Bright	sZ	41.1	SupplierStandard	25
103100753050259	7.5	1,770	Bright	zS	41.1	SupplierStandard	25
103100754270259	7.5	1,960	Galvanized	sZ	45.6	SupplierStandard	25
103100753270259	7.5	1,960	Galvanized	zS	45.6	SupplierStandard	25
103100754070259	7.5	1,960	Bright	sZ	45.6	SupplierStandard	25
103100753070259	7.5	1,960	Bright	zS	45.6	SupplierStandard	25
103100754300259	7.5	2,160	Galvanized	sZ	49.6	SupplierStandard	25
103100753300259	7.5	2,160	Galvanized	zS	49.6	SupplierStandard	25
103100754100259	7.5	2,160	Bright	sZ	49.6	SupplierStandard	25
103100753100259	7.5	2,160	Bright	zS	49.6	SupplierStandard	25
103100804250259	8	1,770	Galvanized	sZ	43.7	SupplierStandard	27
103100803250259	8	1,770	Galvanized	zS	43.7	SupplierStandard	27
103100804050259	8	1,770	Bright	sZ	43.7	SupplierStandard	27
103100803050259	8	1,770	Bright	zS	43.7	SupplierStandard	27
103100804270259	8	1,960	Galvanized	sZ	48.6	SupplierStandard	27
103100803270259	8	1,960	Galvanized	zS	48.6	SupplierStandard	27
103100804070259	8	1,960	Bright	sZ	48.6	SupplierStandard	27
103100803070259	8	1,960	Bright	zS	48.6	SupplierStandard	27
103100804300259	8	2,160	Galvanized	sZ	53.4	SupplierStandard	27
103100803300259	8	2,160	Galvanized	zS	53.4	SupplierStandard	27
103100804100259	8	2,160	Bright	sZ	53.4	SupplierStandard	27
103100803100259	8	2,160	Bright	zS	53.4	SupplierStandard	27
103100854250259	8.5	1,770	Galvanized	sZ	52.8	SupplierStandard	33
103100853250259	8.5	1,770	Galvanized	zS	52.8	SupplierStandard	33
103100854050259	8.5	1,770	Bright	sZ	52.8	SupplierStandard	33
103100853050259	8.5	1,770	Bright	zS	52.8	SupplierStandard	33
103100854270259	8.5	1,960	Galvanized	sZ	58.5	SupplierStandard	33
103100853270259	8.5	1,960	Galvanized	zS	58.5	SupplierStandard	33
103100854070259	8.5	1,960	Bright	sZ	58.5	SupplierStandard	33
103100853070259	8.5	1,960	Bright	zS	58.5	SupplierStandard	33
103100854300259	8.5	2,160	Galvanized	sZ	63.7	SupplierStandard	33

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100853300259	8.5	2,160	Galvanized	zS	63.7	SupplierStandard	33
103100854100259	8.5	2,160	Bright	sZ	63.7	SupplierStandard	33
103100853100259	8.5	2,160	Bright	zS	63.7	SupplierStandard	33
103100904250259	9	1,770	Galvanized	sZ	56.9	SupplierStandard	35
103100903250259	9	1,770	Galvanized	zS	56.9	SupplierStandard	35
103100904050259	9	1,770	Bright	sZ	56.9	SupplierStandard	35
103100903050259	9	1,770	Bright	zS	56.9	SupplierStandard	35
103100904270259	9	1,960	Galvanized	sZ	63.3	SupplierStandard	35
103100903270259	9	1,960	Galvanized	zS	63.3	SupplierStandard	35
103100904070259	9	1,960	Bright	sZ	63.3	SupplierStandard	35
103100903070259	9	1,960	Bright	zS	63.3	SupplierStandard	35
103100904300259	9	2,160	Galvanized	sZ	69.3	SupplierStandard	35
103100903300259	9	2,160	Galvanized	zS	69.3	SupplierStandard	35
103100904100259	9	2,160	Bright	sZ	69.3	SupplierStandard	35
103100903100259	9	2,160	Bright	zS	69.3	SupplierStandard	35
103100954250259	9.5	1,770	Galvanized	sZ	66	SupplierStandard	41
103100953250259	9.5	1,770	Galvanized	zS	66	SupplierStandard	41
103100954050259	9.5	1,770	Bright	sZ	66	SupplierStandard	41
103100953050259	9.5	1,770	Bright	zS	66	SupplierStandard	41
103100954270259	9.5	1,960	Galvanized	sZ	73.1	SupplierStandard	41
103100953270259	9.5	1,960	Galvanized	zS	73.1	SupplierStandard	41
103100954070259	9.5	1,960	Bright	sZ	73.1	SupplierStandard	41
103100953070259	9.5	1,960	Bright	zS	73.1	SupplierStandard	41
103100954300259	9.5	2,160	Galvanized	sZ	79.6	SupplierStandard	41
103100953300259	9.5	2,160	Galvanized	zS	79.6	SupplierStandard	41
103100954100259	9.5	2,160	Bright	sZ	79.6	SupplierStandard	41
103100953100259	9.5	2,160	Bright	zS	79.6	SupplierStandard	41
103101004250259	10	1,770	Galvanized	sZ	68.2	SupplierStandard	42
103101003250259	10	1,770	Galvanized	zS	68.2	SupplierStandard	42
103101004050259	10	1,770	Bright	sZ	68.2	SupplierStandard	42
103101003050259	10	1,770	Bright	zS	68.2	SupplierStandard	42

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101004270259	10	1,960	Galvanized	sZ	76	SupplierStandard	42
103101003270259	10	1,960	Galvanized	zS	76	SupplierStandard	42
103101004070259	10	1,960	Bright	sZ	76	SupplierStandard	42
103101003070259	10	1,960	Bright	zS	76	SupplierStandard	42
103101004300259	10	2,160	Galvanized	sZ	83	SupplierStandard	42
103101003300259	10	2,160	Galvanized	zS	83	SupplierStandard	42
103101004100259	10	2,160	Bright	sZ	83	SupplierStandard	42
103101003100259	10	2,160	Bright	zS	83	SupplierStandard	42
103101104250259	11	1,770	Galvanized	sZ	86.3	SupplierStandard	54
103101103250259	11	1,770	Galvanized	zS	86.3	SupplierStandard	54
103101104050259	11	1,770	Bright	sZ	86.3	SupplierStandard	54
103101103050259	11	1,770	Bright	zS	86.3	SupplierStandard	54
103101104270259	11	1,960	Galvanized	sZ	96.1	SupplierStandard	54
103101103270259	11	1,960	Galvanized	zS	96.1	SupplierStandard	54
103101104070259	11	1,960	Bright	sZ	96.1	SupplierStandard	54
103101103070259	11	1,960	Bright	zS	96.1	SupplierStandard	54
103101104300259	11	2,160	Galvanized	sZ	105	SupplierStandard	54
103101103300259	11	2,160	Galvanized	zS	105	SupplierStandard	54
103101104100259	11	2,160	Bright	sZ	105	SupplierStandard	54
103101103100259	11	2,160	Bright	zS	105	SupplierStandard	54
103101204250259	12	1,770	Galvanized	sZ	106	SupplierStandard	65
103101203250259	12	1,770	Galvanized	zS	106	SupplierStandard	65
103101204050259	12	1,770	Bright	sZ	106	SupplierStandard	65
103101203050259	12	1,770	Bright	zS	106	SupplierStandard	65
103101204270259	12	1,960	Galvanized	sZ	118	SupplierStandard	65
103101203270259	12	1,960	Galvanized	zS	118	SupplierStandard	65
103101204070259	12	1,960	Bright	sZ	118	SupplierStandard	65
103101203070259	12	1,960	Bright	zS	118	SupplierStandard	65
103101204300259	12	2,160	Galvanized	sZ	129	SupplierStandard	65
103101203300259	12	2,160	Galvanized	zS	129	SupplierStandard	65
103101204100259	12	2,160	Bright	sZ	129	SupplierStandard	65

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101203100259	12	2,160	Bright	zS	129	SupplierStandard	65
103101304250259	13	1,770	Galvanized	sZ	122	SupplierStandard	76
103101303250259	13	1,770	Galvanized	zS	122	SupplierStandard	76
103101304050259	13	1,770	Bright	sZ	122	SupplierStandard	76
103101303050259	13	1,770	Bright	zS	122	SupplierStandard	76
103101304270259	13	1,960	Galvanized	sZ	136	SupplierStandard	76
103101303270259	13	1,960	Galvanized	zS	136	SupplierStandard	76
103101304070259	13	1,960	Bright	sZ	136	SupplierStandard	76
103101303070259	13	1,960	Bright	zS	136	SupplierStandard	76
103101304300259	13	2,160	Galvanized	sZ	148	SupplierStandard	76
103101303300259	13	2,160	Galvanized	zS	148	SupplierStandard	76
103101304100259	13	2,160	Bright	sZ	148	SupplierStandard	76
103101303100259	13	2,160	Bright	zS	148	SupplierStandard	76
103101404250259	14	1,770	Galvanized	sZ	137	SupplierStandard	85
103101403250259	14	1,770	Galvanized	zS	137	SupplierStandard	85
103101404050259	14	1,770	Bright	sZ	137	SupplierStandard	85
103101403050259	14	1,770	Bright	zS	137	SupplierStandard	85
103101404270259	14	1,960	Galvanized	sZ	152	SupplierStandard	85
103101403270259	14	1,960	Galvanized	zS	152	SupplierStandard	85
103101404070259	14	1,960	Bright	sZ	152	SupplierStandard	85
103101403070259	14	1,960	Bright	zS	152	SupplierStandard	85
103101404300259	14	2,160	Galvanized	sZ	166	SupplierStandard	85
103101403300259	14	2,160	Galvanized	zS	166	SupplierStandard	85
103101404100259	14	2,160	Bright	sZ	166	SupplierStandard	85
103101403100259	14	2,160	Bright	zS	166	SupplierStandard	85
103101504250259	15	1,770	Galvanized	sZ	166	SupplierStandard	103
103101503250259	15	1,770	Galvanized	zS	166	SupplierStandard	103
103101504050259	15	1,770	Bright	sZ	166	SupplierStandard	103
103101503050259	15	1,770	Bright	zS	166	SupplierStandard	103
103101504270259	15	1,960	Galvanized	sZ	184	SupplierStandard	103
103101503270259	15	1,960	Galvanized	zS	184	SupplierStandard	103

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101504070259	15	1,960	Bright	sZ	184	SupplierStandard	103
103101503070259	15	1,960	Bright	zS	184	SupplierStandard	103
103101504300259	15	2,160	Galvanized	sZ	201	SupplierStandard	103
103101503300259	15	2,160	Galvanized	zS	201	SupplierStandard	103
103101504100259	15	2,160	Bright	sZ	201	SupplierStandard	103
103101503100259	15	2,160	Bright	zS	201	SupplierStandard	103
103101604250259	16	1,770	Galvanized	sZ	187	SupplierStandard	116
103101603250259	16	1,770	Galvanized	zS	187	SupplierStandard	116
103101604050259	16	1,770	Bright	sZ	187	SupplierStandard	116
103101603050259	16	1,770	Bright	zS	187	SupplierStandard	116
103101604270259	16	1,960	Galvanized	sZ	208	SupplierStandard	116
103101603270259	16	1,960	Galvanized	zS	208	SupplierStandard	116
103101604070259	16	1,960	Bright	sZ	208	SupplierStandard	116
103101603070259	16	1,960	Bright	zS	208	SupplierStandard	116
103101604300259	16	2,160	Galvanized	sZ	227	SupplierStandard	116
103101603300259	16	2,160	Galvanized	zS	227	SupplierStandard	116
103101604100259	16	2,160	Bright	sZ	227	SupplierStandard	116
103101603100259	16	2,160	Bright	zS	227	SupplierStandard	116
103101704250259	17	1,770	Galvanized	sZ	210	SupplierStandard	130
103101703250259	17	1,770	Galvanized	zS	210	SupplierStandard	130
103101704050259	17	1,770	Bright	sZ	210	SupplierStandard	130
103101703050259	17	1,770	Bright	zS	210	SupplierStandard	130
103101704270259	17	1,960	Galvanized	sZ	233	SupplierStandard	130
103101703270259	17	1,960	Galvanized	zS	233	SupplierStandard	130
103101704070259	17	1,960	Bright	sZ	233	SupplierStandard	130
103101703070259	17	1,960	Bright	zS	233	SupplierStandard	130
103101704300259	17	2,160	Galvanized	sZ	254	SupplierStandard	130
103101703300259	17	2,160	Galvanized	zS	254	SupplierStandard	130
103101704100259	17	2,160	Bright	sZ	254	SupplierStandard	130
103101703100259	17	2,160	Bright	zS	254	SupplierStandard	130
103101804250259	18	1,770	Galvanized	sZ	236	SupplierStandard	146

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101803250259	18	1,770	Galvanized	zS	236	SupplierStandard	146
103101804050259	18	1,770	Bright	sZ	236	SupplierStandard	146
103101803050259	18	1,770	Bright	zS	236	SupplierStandard	146
103101804270259	18	1,960	Galvanized	sZ	262	SupplierStandard	146
103101803270259	18	1,960	Galvanized	zS	262	SupplierStandard	146
103101804070259	18	1,960	Bright	sZ	262	SupplierStandard	146
103101803070259	18	1,960	Bright	zS	262	SupplierStandard	146
103101804300259	18	2,160	Galvanized	sZ	286	SupplierStandard	146
103101803300259	18	2,160	Galvanized	zS	286	SupplierStandard	146
103101804100259	18	2,160	Bright	sZ	286	SupplierStandard	146
103101803100259	18	2,160	Bright	zS	286	SupplierStandard	146
103101904250259	19	1,770	Galvanized	sZ	260	SupplierStandard	161
103101903250259	19	1,770	Galvanized	zS	260	SupplierStandard	161
103101904050259	19	1,770	Bright	sZ	260	SupplierStandard	161
103101903050259	19	1,770	Bright	zS	260	SupplierStandard	161
103101904270259	19	1,960	Galvanized	sZ	289	SupplierStandard	161
103101903270259	19	1,960	Galvanized	zS	289	SupplierStandard	161
103101904070259	19	1,960	Bright	sZ	289	SupplierStandard	161
103101903070259	19	1,960	Bright	zS	289	SupplierStandard	161
103101904300259	19	2,160	Galvanized	sZ	316	SupplierStandard	161
103101903300259	19	2,160	Galvanized	zS	316	SupplierStandard	161
103101904100259	19	2,160	Bright	sZ	316	SupplierStandard	161
103101903100259	19	2,160	Bright	zS	316	SupplierStandard	161
103102004250259	20	1,770	Galvanized	sZ	288	SupplierStandard	178
103102003250259	20	1,770	Galvanized	zS	288	SupplierStandard	178
103102004050259	20	1,770	Bright	sZ	288	SupplierStandard	178
103102003050259	20	1,770	Bright	zS	288	SupplierStandard	178
103102004270259	20	1,960	Galvanized	sZ	320	SupplierStandard	178
103102003270259	20	1,960	Galvanized	zS	320	SupplierStandard	178
103102004070259	20	1,960	Bright	sZ	320	SupplierStandard	178
103102003070259	20	1,960	Bright	zS	320	SupplierStandard	178

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102004300259	20	2,160	Galvanized	sZ	348	SupplierStandard	178
103102003300259	20	2,160	Galvanized	zS	348	SupplierStandard	178
103102004100259	20	2,160	Bright	sZ	348	SupplierStandard	178
103102003100259	20	2,160	Bright	zS	348	SupplierStandard	178
103102104250259	21	1,770	Galvanized	sZ	315	SupplierStandard	195
103102103250259	21	1,770	Galvanized	zS	315	SupplierStandard	195
103102104050259	21	1,770	Bright	sZ	315	SupplierStandard	195
103102103050259	21	1,770	Bright	zS	315	SupplierStandard	195
103102104270259	21	1,960	Galvanized	sZ	351	SupplierStandard	195
103102103270259	21	1,960	Galvanized	zS	351	SupplierStandard	195
103102104070259	21	1,960	Bright	sZ	351	SupplierStandard	195
103102103070259	21	1,960	Bright	zS	351	SupplierStandard	195
103102104300259	21	2,160	Galvanized	sZ	382	SupplierStandard	195
103102103300259	21	2,160	Galvanized	zS	382	SupplierStandard	195
103102104100259	21	2,160	Bright	sZ	382	SupplierStandard	195
103102103100259	21	2,160	Bright	zS	382	SupplierStandard	195
103102204250259	22	1,770	Galvanized	sZ	361	SupplierStandard	223
103102203250259	22	1,770	Galvanized	zS	361	SupplierStandard	223
103102204050259	22	1,770	Bright	sZ	361	SupplierStandard	223
103102203050259	22	1,770	Bright	zS	361	SupplierStandard	223
103102204270259	22	1,960	Galvanized	sZ	401	SupplierStandard	223
103102203270259	22	1,960	Galvanized	zS	401	SupplierStandard	223
103102204070259	22	1,960	Bright	sZ	401	SupplierStandard	223
103102203070259	22	1,960	Bright	zS	401	SupplierStandard	223
103102204300259	22	2,160	Galvanized	sZ	437	SupplierStandard	223
103102203300259	22	2,160	Galvanized	zS	437	SupplierStandard	223
103102204100259	22	2,160	Bright	sZ	437	SupplierStandard	223
103102203100259	22	2,160	Bright	zS	437	SupplierStandard	223
103102304250259	23	1,770	Galvanized	sZ	390	SupplierStandard	241
103102303250259	23	1,770	Galvanized	zS	390	SupplierStandard	241
103102304050259	23	1,770	Bright	sZ	390	SupplierStandard	241

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102303050259	23	1,770	Bright	zS	390	SupplierStandard	241
103102304270259	23	1,960	Galvanized	sZ	434	SupplierStandard	241
103102303270259	23	1,960	Galvanized	zS	434	SupplierStandard	241
103102304070259	23	1,960	Bright	sZ	434	SupplierStandard	241
103102303070259	23	1,960	Bright	zS	434	SupplierStandard	241
103102304300259	23	2,160	Galvanized	sZ	473	SupplierStandard	241
103102303300259	23	2,160	Galvanized	zS	473	SupplierStandard	241
103102304100259	23	2,160	Bright	sZ	473	SupplierStandard	241
103102303100259	23	2,160	Bright	zS	473	SupplierStandard	241
103102404250259	24	1,770	Galvanized	sZ	422	SupplierStandard	261
103102403250259	24	1,770	Galvanized	zS	422	SupplierStandard	261
103102404050259	24	1,770	Bright	sZ	422	SupplierStandard	261
103102403050259	24	1,770	Bright	zS	422	SupplierStandard	261
103102404270259	24	1,960	Galvanized	sZ	469	SupplierStandard	261
103102403270259	24	1,960	Galvanized	zS	469	SupplierStandard	261
103102404070259	24	1,960	Bright	sZ	469	SupplierStandard	261
103102403070259	24	1,960	Bright	zS	469	SupplierStandard	261
103102404300259	24	2,160	Galvanized	sZ	511	SupplierStandard	261
103102403300259	24	2,160	Galvanized	zS	511	SupplierStandard	261
103102404100259	24	2,160	Bright	sZ	511	SupplierStandard	261
103102403100259	24	2,160	Bright	zS	511	SupplierStandard	261
103102504250259	25	1,770	Galvanized	sZ	462	SupplierStandard	285
103102503250259	25	1,770	Galvanized	zS	462	SupplierStandard	285
103102504050259	25	1,770	Bright	sZ	462	SupplierStandard	285
103102503050259	25	1,770	Bright	zS	462	SupplierStandard	285
103102504270259	25	1,960	Galvanized	sZ	513	SupplierStandard	285
103102503270259	25	1,960	Galvanized	zS	513	SupplierStandard	285
103102504070259	25	1,960	Bright	sZ	513	SupplierStandard	285
103102503070259	25	1,960	Bright	zS	513	SupplierStandard	285
103102504300259	25	2,160	Galvanized	sZ	559	SupplierStandard	285
103102503300259	25	2,160	Galvanized	zS	559	SupplierStandard	285

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102504100259	25	2,160	Bright	sZ	559	SupplierStandard	285
103102503100259	25	2,160	Bright	zS	559	SupplierStandard	285
103102604250259	26	1,770	Galvanized	sZ	497	SupplierStandard	307
103102603250259	26	1,770	Galvanized	zS	497	SupplierStandard	307
103102604050259	26	1,770	Bright	sZ	497	SupplierStandard	307
103102603050259	26	1,770	Bright	zS	497	SupplierStandard	307
103102604270259	26	1,960	Galvanized	sZ	552	SupplierStandard	307
103102603270259	26	1,960	Galvanized	zS	552	SupplierStandard	307
103102604070259	26	1,960	Bright	sZ	552	SupplierStandard	307
103102603070259	26	1,960	Bright	zS	552	SupplierStandard	307
103102604300259	26	2,160	Galvanized	sZ	601	SupplierStandard	307
103102603300259	26	2,160	Galvanized	zS	601	SupplierStandard	307
103102604100259	26	2,160	Bright	sZ	601	SupplierStandard	307
103102603100259	26	2,160	Bright	zS	601	SupplierStandard	307
103102704250259	27	1,770	Galvanized	sZ	528	SupplierStandard	326
103102703250259	27	1,770	Galvanized	zS	528	SupplierStandard	326
103102704050259	27	1,770	Bright	sZ	528	SupplierStandard	326
103102703050259	27	1,770	Bright	zS	528	SupplierStandard	326
103102704270259	27	1,960	Galvanized	sZ	587	SupplierStandard	326
103102703270259	27	1,960	Galvanized	zS	587	SupplierStandard	326
103102704070259	27	1,960	Bright	sZ	587	SupplierStandard	326
103102703070259	27	1,960	Bright	zS	587	SupplierStandard	326
103102704300259	27	2,160	Galvanized	sZ	640	SupplierStandard	326
103102703300259	27	2,160	Galvanized	zS	640	SupplierStandard	326
103102704100259	27	2,160	Bright	sZ	640	SupplierStandard	326
103102703100259	27	2,160	Bright	zS	640	SupplierStandard	326
103102804250259	28	1,770	Galvanized	sZ	580	SupplierStandard	358
103102803250259	28	1,770	Galvanized	zS	580	SupplierStandard	358
103102804050259	28	1,770	Bright	sZ	580	SupplierStandard	358
103102803050259	28	1,770	Bright	zS	580	SupplierStandard	358
103102804270259	28	1,960	Galvanized	sZ	645	SupplierStandard	358

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102803270259	28	1,960	Galvanized	zS	645	SupplierStandard	358
103102804070259	28	1,960	Bright	sZ	645	SupplierStandard	358
103102803070259	28	1,960	Bright	zS	645	SupplierStandard	358
103102804300259	28	2,160	Galvanized	sZ	701	SupplierStandard	358
103102803300259	28	2,160	Galvanized	zS	701	SupplierStandard	358
103102804100259	28	2,160	Bright	sZ	701	SupplierStandard	358
103102803100259	28	2,160	Bright	zS	701	SupplierStandard	358
103102904250259	29	1,770	Galvanized	sZ	620	SupplierStandard	382
103102903250259	29	1,770	Galvanized	zS	620	SupplierStandard	382
103102904050259	29	1,770	Bright	sZ	620	SupplierStandard	382
103102903050259	29	1,770	Bright	zS	620	SupplierStandard	382
103102904270259	29	1,960	Galvanized	sZ	689	SupplierStandard	382
103102903270259	29	1,960	Galvanized	zS	689	SupplierStandard	382
103102904070259	29	1,960	Bright	sZ	689	SupplierStandard	382
103102903070259	29	1,960	Bright	zS	689	SupplierStandard	382
103102904300259	29	2,160	Galvanized	sZ	749	SupplierStandard	382
103102903300259	29	2,160	Galvanized	zS	749	SupplierStandard	382
103102904100259	29	2,160	Bright	sZ	749	SupplierStandard	382
103102903100259	29	2,160	Bright	zS	749	SupplierStandard	382
103103004250259	30	1,770	Galvanized	sZ	663	SupplierStandard	409
103103003250259	30	1,770	Galvanized	zS	663	SupplierStandard	409
103103004050259	30	1,770	Bright	sZ	663	SupplierStandard	409
103103003050259	30	1,770	Bright	zS	663	SupplierStandard	409
103103004270259	30	1,960	Galvanized	sZ	736	SupplierStandard	409
103103003270259	30	1,960	Galvanized	zS	736	SupplierStandard	409
103103004070259	30	1,960	Bright	sZ	736	SupplierStandard	409
103103003070259	30	1,960	Bright	zS	736	SupplierStandard	409
103103004300259	30	2,160	Galvanized	sZ	802	SupplierStandard	409
103103003300259	30	2,160	Galvanized	zS	802	SupplierStandard	409
103103004100259	30	2,160	Bright	sZ	802	SupplierStandard	409
103103003100259	30	2,160	Bright	zS	802	SupplierStandard	409

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103104250259	31	1,770	Galvanized	sZ	703	SupplierStandard	434
103103103250259	31	1,770	Galvanized	zS	703	SupplierStandard	434
103103104050259	31	1,770	Bright	sZ	703	SupplierStandard	434
103103103050259	31	1,770	Bright	zS	703	SupplierStandard	434
103103104270259	31	1,960	Galvanized	sZ	781	SupplierStandard	434
103103103270259	31	1,960	Galvanized	zS	781	SupplierStandard	434
103103104070259	31	1,960	Bright	sZ	781	SupplierStandard	434
103103103070259	31	1,960	Bright	zS	781	SupplierStandard	434
103103104300259	31	2,160	Galvanized	sZ	850	SupplierStandard	434
103103103300259	31	2,160	Galvanized	zS	850	SupplierStandard	434
103103104100259	31	2,160	Bright	sZ	850	SupplierStandard	434
103103103100259	31	2,160	Bright	zS	850	SupplierStandard	434
103103204250259	32	1,770	Galvanized	sZ	745	SupplierStandard	459
103103203250259	32	1,770	Galvanized	zS	745	SupplierStandard	459
103103204050259	32	1,770	Bright	sZ	745	SupplierStandard	459
103103203050259	32	1,770	Bright	zS	745	SupplierStandard	459
103103204270259	32	1,960	Galvanized	sZ	827	SupplierStandard	459
103103203270259	32	1,960	Galvanized	zS	827	SupplierStandard	459
103103204070259	32	1,960	Bright	sZ	827	SupplierStandard	459
103103203070259	32	1,960	Bright	zS	827	SupplierStandard	459
103103204300259	32	2,160	Galvanized	sZ	901	SupplierStandard	459
103103203300259	32	2,160	Galvanized	zS	901	SupplierStandard	459
103103204100259	32	2,160	Bright	sZ	901	SupplierStandard	459
103103203100259	32	2,160	Bright	zS	901	SupplierStandard	459
103103304250259	33	1,770	Galvanized	sZ	806	SupplierStandard	497
103103303250259	33	1,770	Galvanized	zS	806	SupplierStandard	497
103103304050259	33	1,770	Bright	sZ	806	SupplierStandard	497
103103303050259	33	1,770	Bright	zS	806	SupplierStandard	497
103103304270259	33	1,960	Galvanized	sZ	896	SupplierStandard	497
103103303270259	33	1,960	Galvanized	zS	896	SupplierStandard	497
103103304070259	33	1,960	Bright	sZ	896	SupplierStandard	497

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103303070259	33	1,960	Bright	zS	896	SupplierStandard	497
103103304300259	33	2,160	Galvanized	sZ	975	SupplierStandard	497
103103303300259	33	2,160	Galvanized	zS	975	SupplierStandard	497
103103304100259	33	2,160	Bright	sZ	975	SupplierStandard	497
103103303100259	33	2,160	Bright	zS	975	SupplierStandard	497
103103404250259	34	1,770	Galvanized	sZ	855	SupplierStandard	528
103103403250259	34	1,770	Galvanized	zS	855	SupplierStandard	528
103103404050259	34	1,770	Bright	sZ	855	SupplierStandard	528
103103403050259	34	1,770	Bright	zS	855	SupplierStandard	528
103103404270259	34	1,960	Galvanized	sZ	951	SupplierStandard	528
103103403270259	34	1,960	Galvanized	zS	951	SupplierStandard	528
103103404070259	34	1,960	Bright	sZ	951	SupplierStandard	528
103103403070259	34	1,960	Bright	zS	951	SupplierStandard	528
103103404300259	34	2,160	Galvanized	sZ	1,035	SupplierStandard	528
103103403300259	34	2,160	Galvanized	zS	1,035	SupplierStandard	528
103103404100259	34	2,160	Bright	sZ	1,035	SupplierStandard	528
103103403100259	34	2,160	Bright	zS	1,035	SupplierStandard	528
103103504250259	35	1,770	Galvanized	sZ	884	SupplierStandard	549
103103503250259	35	1,770	Galvanized	zS	884	SupplierStandard	549
103103504050259	35	1,770	Bright	sZ	884	SupplierStandard	549
103103503050259	35	1,770	Bright	zS	884	SupplierStandard	549
103103504270259	35	1,960	Galvanized	sZ	982	SupplierStandard	549
103103503270259	35	1,960	Galvanized	zS	982	SupplierStandard	549
103103504070259	35	1,960	Bright	sZ	982	SupplierStandard	549
103103503070259	35	1,960	Bright	zS	982	SupplierStandard	549
103103504300259	35	2,160	Galvanized	sZ	1,069	SupplierStandard	549
103103503300259	35	2,160	Galvanized	zS	1,069	SupplierStandard	549
103103504100259	35	2,160	Bright	sZ	1,069	SupplierStandard	549
103103503100259	35	2,160	Bright	zS	1,069	SupplierStandard	549
103103604250259	36	1,770	Galvanized	sZ	953	SupplierStandard	588
103103603250259	36	1,770	Galvanized	zS	953	SupplierStandard	588

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103604050259	36	1,770	Bright	sZ	953	SupplierStandard	588
103103603050259	36	1,770	Bright	zS	953	SupplierStandard	588
103103604270259	36	1,960	Galvanized	sZ	1,058	SupplierStandard	588
103103603270259	36	1,960	Galvanized	zS	1,058	SupplierStandard	588
103103604070259	36	1,960	Bright	sZ	1,058	SupplierStandard	588
103103603070259	36	1,960	Bright	zS	1,058	SupplierStandard	588
103103604300259	36	2,160	Galvanized	sZ	1,152	SupplierStandard	588
103103603300259	36	2,160	Galvanized	zS	1,152	SupplierStandard	588
103103604100259	36	2,160	Bright	sZ	1,152	SupplierStandard	588
103103603100259	36	2,160	Bright	zS	1,152	SupplierStandard	588
103103704250259	37	1,770	Galvanized	sZ	1,002	SupplierStandard	618
103103703250259	37	1,770	Galvanized	zS	1,002	SupplierStandard	618
103103704050259	37	1,770	Bright	sZ	1,002	SupplierStandard	618
103103703050259	37	1,770	Bright	zS	1,002	SupplierStandard	618
103103704270259	37	1,960	Galvanized	sZ	1,113	SupplierStandard	618
103103703270259	37	1,960	Galvanized	zS	1,113	SupplierStandard	618
103103704070259	37	1,960	Bright	sZ	1,113	SupplierStandard	618
103103703070259	37	1,960	Bright	zS	1,113	SupplierStandard	618
103103704300259	37	2,160	Galvanized	sZ	1,212	SupplierStandard	618
103103703300259	37	2,160	Galvanized	zS	1,212	SupplierStandard	618
103103704100259	37	2,160	Bright	sZ	1,212	SupplierStandard	618
103103703100259	37	2,160	Bright	zS	1,212	SupplierStandard	618
103103804250259	38	1,770	Galvanized	sZ	1,069	SupplierStandard	653
103103803250259	38	1,770	Galvanized	zS	1,069	SupplierStandard	653
103103804050259	38	1,770	Bright	sZ	1,069	SupplierStandard	653
103103803050259	38	1,770	Bright	zS	1,069	SupplierStandard	653
103103804270259	38	1,960	Galvanized	sZ	1,188	SupplierStandard	653
103103803270259	38	1,960	Galvanized	zS	1,188	SupplierStandard	653
103103804070259	38	1,960	Bright	sZ	1,188	SupplierStandard	653
103103803070259	38	1,960	Bright	zS	1,188	SupplierStandard	653
103103804300259	38	2,160	Galvanized	sZ	1,293	SupplierStandard	653

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103803300259	38	2,160	Galvanized	zS	1,293	SupplierStandard	653
103103804100259	38	2,160	Bright	sZ	1,293	SupplierStandard	653
103103803100259	38	2,160	Bright	zS	1,293	SupplierStandard	653
103103904250259	39	1,770	Galvanized	sZ	1,120	SupplierStandard	691
103103903250259	39	1,770	Galvanized	zS	1,120	SupplierStandard	691
103103904050259	39	1,770	Bright	sZ	1,120	SupplierStandard	691
103103903050259	39	1,770	Bright	zS	1,120	SupplierStandard	691
103103904270259	39	1,960	Galvanized	sZ	1,244	SupplierStandard	691
103103903270259	39	1,960	Galvanized	zS	1,244	SupplierStandard	691
103103904070259	39	1,960	Bright	sZ	1,244	SupplierStandard	691
103103903070259	39	1,960	Bright	zS	1,244	SupplierStandard	691
103103904300259	39	2,160	Galvanized	sZ	1,354	SupplierStandard	691
103103903300259	39	2,160	Galvanized	zS	1,354	SupplierStandard	691
103103904100259	39	2,160	Bright	sZ	1,354	SupplierStandard	691
103103903100259	39	2,160	Bright	zS	1,354	SupplierStandard	691
103104004250259	40	1,770	Galvanized	sZ	1,180	SupplierStandard	728
103104003250259	40	1,770	Galvanized	zS	1,180	SupplierStandard	728
103104004050259	40	1,770	Bright	sZ	1,180	SupplierStandard	728
103104003050259	40	1,770	Bright	zS	1,180	SupplierStandard	728
103104004270259	40	1,960	Galvanized	sZ	1,311	SupplierStandard	728
103104003270259	40	1,960	Galvanized	zS	1,311	SupplierStandard	728
103104004070259	40	1,960	Bright	sZ	1,311	SupplierStandard	728
103104003070259	40	1,960	Bright	zS	1,311	SupplierStandard	728
103104004300259	40	2,160	Galvanized	sZ	1,427	SupplierStandard	728
103104003300259	40	2,160	Galvanized	zS	1,427	SupplierStandard	728
103104004100259	40	2,160	Bright	sZ	1,427	SupplierStandard	728
103104003100259	40	2,160	Bright	zS	1,427	SupplierStandard	728
103104104250259	41	1,770	Galvanized	sZ	1,232	SupplierStandard	760
103104103250259	41	1,770	Galvanized	zS	1,232	SupplierStandard	760
103104104050259	41	1,770	Bright	sZ	1,232	SupplierStandard	760
103104103050259	41	1,770	Bright	zS	1,232	SupplierStandard	760

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104104270259	41	1,960	Galvanized	sZ	1,369	SupplierStandard	760
103104103270259	41	1,960	Galvanized	zS	1,369	SupplierStandard	760
103104104070259	41	1,960	Bright	sZ	1,369	SupplierStandard	760
103104103070259	41	1,960	Bright	zS	1,369	SupplierStandard	760
103104104300259	41	2,160	Galvanized	sZ	1,490	SupplierStandard	760
103104103300259	41	2,160	Galvanized	zS	1,490	SupplierStandard	760
103104104100259	41	2,160	Bright	sZ	1,490	SupplierStandard	760
103104103100259	41	2,160	Bright	zS	1,490	SupplierStandard	760
103104204250259	42	1,770	Galvanized	sZ	1,307	SupplierStandard	806
103104203250259	42	1,770	Galvanized	zS	1,307	SupplierStandard	806
103104204050259	42	1,770	Bright	sZ	1,307	SupplierStandard	806
103104203050259	42	1,770	Bright	zS	1,307	SupplierStandard	806
103104204270259	42	1,960	Galvanized	sZ	1,452	SupplierStandard	806
103104203270259	42	1,960	Galvanized	zS	1,452	SupplierStandard	806
103104204070259	42	1,960	Bright	sZ	1,452	SupplierStandard	806
103104203070259	42	1,960	Bright	zS	1,452	SupplierStandard	806
103104204300259	42	2,160	Galvanized	sZ	1,581	SupplierStandard	806
103104203300259	42	2,160	Galvanized	zS	1,581	SupplierStandard	806
103104204100259	42	2,160	Bright	sZ	1,581	SupplierStandard	806
103104203100259	42	2,160	Bright	zS	1,581	SupplierStandard	806
103104304250259	43	1,770	Galvanized	sZ	1,368	SupplierStandard	844
103104303250259	43	1,770	Galvanized	zS	1,368	SupplierStandard	844
103104304050259	43	1,770	Bright	sZ	1,368	SupplierStandard	844
103104303050259	43	1,770	Bright	zS	1,368	SupplierStandard	844
103104304270259	43	1,960	Galvanized	sZ	1,520	SupplierStandard	844
103104303270259	43	1,960	Galvanized	zS	1,520	SupplierStandard	844
103104304070259	43	1,960	Bright	sZ	1,520	SupplierStandard	844
103104303070259	43	1,960	Bright	zS	1,520	SupplierStandard	844
103104304300259	43	2,160	Galvanized	sZ	1,654	SupplierStandard	844
103104303300259	43	2,160	Galvanized	zS	1,654	SupplierStandard	844
103104304100259	43	2,160	Bright	sZ	1,654	SupplierStandard	844

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104303100259	43	2,160	Bright	zS	1,654	SupplierStandard	844
103104404250259	44	1,770	Galvanized	sZ	1,434	SupplierStandard	885
103104403250259	44	1,770	Galvanized	zS	1,434	SupplierStandard	885
103104404050259	44	1,770	Bright	sZ	1,434	SupplierStandard	885
103104403050259	44	1,770	Bright	zS	1,434	SupplierStandard	885
103104404270259	44	1,960	Galvanized	sZ	1,594	SupplierStandard	885
103104403270259	44	1,960	Galvanized	zS	1,594	SupplierStandard	885
103104404070259	44	1,960	Bright	sZ	1,594	SupplierStandard	885
103104403070259	44	1,960	Bright	zS	1,594	SupplierStandard	885
103104404300259	44	2,160	Galvanized	sZ	1,734	SupplierStandard	885
103104403300259	44	2,160	Galvanized	zS	1,734	SupplierStandard	885
103104404100259	44	2,160	Bright	sZ	1,734	SupplierStandard	885
103104403100259	44	2,160	Bright	zS	1,734	SupplierStandard	885
103104504250259	45	1,770	Galvanized	sZ	1,481	SupplierStandard	911
103104503250259	45	1,770	Galvanized	zS	1,481	SupplierStandard	911
103104504050259	45	1,770	Bright	sZ	1,481	SupplierStandard	911
103104503050259	45	1,770	Bright	zS	1,481	SupplierStandard	911
103104504270259	45	1,960	Galvanized	sZ	1,640	SupplierStandard	911
103104503270259	45	1,960	Galvanized	zS	1,640	SupplierStandard	911
103104504070259	45	1,960	Bright	sZ	1,640	SupplierStandard	911
103104503070259	45	1,960	Bright	zS	1,640	SupplierStandard	911
103104504300259	45	2,160	Galvanized	sZ	1,786	SupplierStandard	911
103104503300259	45	2,160	Galvanized	zS	1,786	SupplierStandard	911
103104504100259	45	2,160	Bright	sZ	1,786	SupplierStandard	911
103104503100259	45	2,160	Bright	zS	1,786	SupplierStandard	911
103104604250259	46	1,770	Galvanized	sZ	1,550	SupplierStandard	956
103104603250259	46	1,770	Galvanized	zS	1,550	SupplierStandard	956
103104604050259	46	1,770	Bright	sZ	1,550	SupplierStandard	956
103104603050259	46	1,770	Bright	zS	1,550	SupplierStandard	956
103104604270259	46	1,960	Galvanized	sZ	1,723	SupplierStandard	956
103104603270259	46	1,960	Galvanized	zS	1,723	SupplierStandard	956

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104604070259	46	1,960	Bright	sZ	1,723	SupplierStandard	956
103104603070259	46	1,960	Bright	zS	1,723	SupplierStandard	956
103104604300259	46	2,160	Galvanized	sZ	1,875	SupplierStandard	956
103104603300259	46	2,160	Galvanized	zS	1,875	SupplierStandard	956
103104604100259	46	2,160	Bright	sZ	1,875	SupplierStandard	956
103104603100259	46	2,160	Bright	zS	1,875	SupplierStandard	956
103104704250259	47	1,770	Galvanized	sZ	1,616	SupplierStandard	994
103104703250259	47	1,770	Galvanized	zS	1,616	SupplierStandard	994
103104704050259	47	1,770	Bright	sZ	1,616	SupplierStandard	994
103104703050259	47	1,770	Bright	zS	1,616	SupplierStandard	994
103104704270259	47	1,960	Galvanized	sZ	1,789	SupplierStandard	994
103104703270259	47	1,960	Galvanized	zS	1,789	SupplierStandard	994
103104704070259	47	1,960	Bright	sZ	1,789	SupplierStandard	994
103104703070259	47	1,960	Bright	zS	1,789	SupplierStandard	994
103104704300259	47	2,160	Galvanized	sZ	1,948	SupplierStandard	994
103104703300259	47	2,160	Galvanized	zS	1,948	SupplierStandard	994
103104704100259	47	2,160	Bright	sZ	1,948	SupplierStandard	994
103104703100259	47	2,160	Bright	zS	1,948	SupplierStandard	994
103104804250259	48	1,770	Galvanized	sZ	1,678	SupplierStandard	1,035
103104803250259	48	1,770	Galvanized	zS	1,678	SupplierStandard	1,035
103104804050259	48	1,770	Bright	sZ	1,678	SupplierStandard	1,035
103104803050259	48	1,770	Bright	zS	1,678	SupplierStandard	1,035
103104804270259	48	1,960	Galvanized	sZ	1,864	SupplierStandard	1,035
103104803270259	48	1,960	Galvanized	zS	1,864	SupplierStandard	1,035
103104804070259	48	1,960	Bright	sZ	1,864	SupplierStandard	1,035
103104803070259	48	1,960	Bright	zS	1,864	SupplierStandard	1,035
103104804300259	48	2,160	Galvanized	sZ	2,029	SupplierStandard	1,035
103104803300259	48	2,160	Galvanized	zS	2,029	SupplierStandard	1,035
103104804100259	48	2,160	Bright	sZ	2,029	SupplierStandard	1,035
103104803100259	48	2,160	Bright	zS	2,029	SupplierStandard	1,035
103104904250259	49	1,770	Galvanized	sZ	1,756	SupplierStandard	1,080

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104903250259	49	1,770	Galvanized	zS	1,756	SupplierStandard	1,080
103104904050259	49	1,770	Bright	sZ	1,756	SupplierStandard	1,080
103104903050259	49	1,770	Bright	zS	1,756	SupplierStandard	1,080
103104904270259	49	1,960	Galvanized	sZ	1,944	SupplierStandard	1,080
103104903270259	49	1,960	Galvanized	zS	1,944	SupplierStandard	1,080
103104904070259	49	1,960	Bright	sZ	1,944	SupplierStandard	1,080
103104903070259	49	1,960	Bright	zS	1,944	SupplierStandard	1,080
103104904300259	49	2,160	Galvanized	sZ	2,118	SupplierStandard	1,080
103104903300259	49	2,160	Galvanized	zS	2,118	SupplierStandard	1,080
103104904100259	49	2,160	Bright	sZ	2,118	SupplierStandard	1,080
103104903100259	49	2,160	Bright	zS	2,118	SupplierStandard	1,080
103105004250259	50	1,770	Galvanized	sZ	1,824	SupplierStandard	1,125
103105003250259	50	1,770	Galvanized	zS	1,824	SupplierStandard	1,125
103105004050259	50	1,770	Bright	sZ	1,824	SupplierStandard	1,125
103105003050259	50	1,770	Bright	zS	1,824	SupplierStandard	1,125
103105004270259	50	1,960	Galvanized	sZ	2,027	SupplierStandard	1,125
103105003270259	50	1,960	Galvanized	zS	2,027	SupplierStandard	1,125
103105004070259	50	1,960	Bright	sZ	2,027	SupplierStandard	1,125
103105003070259	50	1,960	Bright	zS	2,027	SupplierStandard	1,125
103105004300259	50	2,160	Galvanized	sZ	2,206	SupplierStandard	1,125
103105003300259	50	2,160	Galvanized	zS	2,206	SupplierStandard	1,125
103105004100259	50	2,160	Bright	sZ	2,206	SupplierStandard	1,125
103105003100259	50	2,160	Bright	zS	2,206	SupplierStandard	1,125
103105104250259	51	1,770	Galvanized	sZ	1,902	SupplierStandard	1,170
103105103250259	51	1,770	Galvanized	zS	1,902	SupplierStandard	1,170
103105104050259	51	1,770	Bright	sZ	1,902	SupplierStandard	1,170
103105103050259	51	1,770	Bright	zS	1,902	SupplierStandard	1,170
103105104270259	51	1,960	Galvanized	sZ	2,107	SupplierStandard	1,170
103105103270259	51	1,960	Galvanized	zS	2,107	SupplierStandard	1,170
103105104070259	51	1,960	Bright	sZ	2,107	SupplierStandard	1,170
103105103070259	51	1,960	Bright	zS	2,107	SupplierStandard	1,170

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105104300259	51	2,160	Galvanized	sZ	2,294	SupplierStandard	1,170
103105103300259	51	2,160	Galvanized	zS	2,294	SupplierStandard	1,170
103105104100259	51	2,160	Bright	sZ	2,294	SupplierStandard	1,170
103105103100259	51	2,160	Bright	zS	2,294	SupplierStandard	1,170
103105204250259	52	1,770	Galvanized	sZ	1,951	SupplierStandard	1,203
103105203250259	52	1,770	Galvanized	zS	1,951	SupplierStandard	1,203
103105204050259	52	1,770	Bright	sZ	1,951	SupplierStandard	1,203
103105203050259	52	1,770	Bright	zS	1,951	SupplierStandard	1,203
103105204270259	52	1,960	Galvanized	sZ	2,168	SupplierStandard	1,203
103105203270259	52	1,960	Galvanized	zS	2,168	SupplierStandard	1,203
103105204070259	52	1,960	Bright	sZ	2,168	SupplierStandard	1,203
103105203070259	52	1,960	Bright	zS	2,168	SupplierStandard	1,203
103105204300259	52	2,160	Galvanized	sZ	2,359	SupplierStandard	1,203
103105203300259	52	2,160	Galvanized	zS	2,359	SupplierStandard	1,203
103105204100259	52	2,160	Bright	sZ	2,359	SupplierStandard	1,203
103105203100259	52	2,160	Bright	zS	2,359	SupplierStandard	1,203
103105304250259	53	1,770	Galvanized	sZ	2,054	SupplierStandard	1,264
103105303250259	53	1,770	Galvanized	zS	2,054	SupplierStandard	1,264
103105304050259	53	1,770	Bright	sZ	2,054	SupplierStandard	1,264
103105303050259	53	1,770	Bright	zS	2,054	SupplierStandard	1,264
103105304270259	53	1,960	Galvanized	sZ	2,275	SupplierStandard	1,264
103105303270259	53	1,960	Galvanized	zS	2,275	SupplierStandard	1,264
103105304070259	53	1,960	Bright	sZ	2,275	SupplierStandard	1,264
103105303070259	53	1,960	Bright	zS	2,275	SupplierStandard	1,264
103105304300259	53	2,160	Galvanized	sZ	2,477	SupplierStandard	1,264
103105303300259	53	2,160	Galvanized	zS	2,477	SupplierStandard	1,264
103105304100259	53	2,160	Bright	sZ	2,477	SupplierStandard	1,264
103105303100259	53	2,160	Bright	zS	2,477	SupplierStandard	1,264
103105404250259	54	1,770	Galvanized	sZ	2,133	SupplierStandard	1,315
103105403250259	54	1,770	Galvanized	zS	2,133	SupplierStandard	1,315
103105404050259	54	1,770	Bright	sZ	2,133	SupplierStandard	1,315

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105403050259	54	1,770	Bright	zS	2,133	SupplierStandard	1,315
103105404270259	54	1,960	Galvanized	sZ	2,369	SupplierStandard	1,315
103105403270259	54	1,960	Galvanized	zS	2,369	SupplierStandard	1,315
103105404070259	54	1,960	Bright	sZ	2,369	SupplierStandard	1,315
103105403070259	54	1,960	Bright	zS	2,369	SupplierStandard	1,315
103105404300259	54	2,160	Galvanized	sZ	2,578	SupplierStandard	1,315
103105403300259	54	2,160	Galvanized	zS	2,578	SupplierStandard	1,315
103105404100259	54	2,160	Bright	sZ	2,578	SupplierStandard	1,315
103105403100259	54	2,160	Bright	zS	2,578	SupplierStandard	1,315
103105504250259	55	1,770	Galvanized	sZ	2,212	SupplierStandard	1,361
103105503250259	55	1,770	Galvanized	zS	2,212	SupplierStandard	1,361
103105504050259	55	1,770	Bright	sZ	2,212	SupplierStandard	1,361
103105503050259	55	1,770	Bright	zS	2,212	SupplierStandard	1,361
103105504270259	55	1,960	Galvanized	sZ	2,450	SupplierStandard	1,361
103105503270259	55	1,960	Galvanized	zS	2,450	SupplierStandard	1,361
103105504070259	55	1,960	Bright	sZ	2,450	SupplierStandard	1,361
103105503070259	55	1,960	Bright	zS	2,450	SupplierStandard	1,361
103105504300259	55	2,160	Galvanized	sZ	2,668	SupplierStandard	1,361
103105503300259	55	2,160	Galvanized	zS	2,668	SupplierStandard	1,361
103105504100259	55	2,160	Bright	sZ	2,668	SupplierStandard	1,361
103105503100259	55	2,160	Bright	zS	2,668	SupplierStandard	1,361
103105604250259	56	1,770	Galvanized	sZ	2,323	SupplierStandard	1,432
103105603250259	56	1,770	Galvanized	zS	2,323	SupplierStandard	1,432
103105604050259	56	1,770	Bright	sZ	2,323	SupplierStandard	1,432
103105603050259	56	1,770	Bright	zS	2,323	SupplierStandard	1,432
103105604270259	56	1,960	Galvanized	sZ	2,581	SupplierStandard	1,432
103105603270259	56	1,960	Galvanized	zS	2,581	SupplierStandard	1,432
103105604070259	56	1,960	Bright	sZ	2,581	SupplierStandard	1,432
103105603070259	56	1,960	Bright	zS	2,581	SupplierStandard	1,432
103105604300259	56	2,160	Galvanized	sZ	2,808	SupplierStandard	1,432
103105603300259	56	2,160	Galvanized	zS	2,808	SupplierStandard	1,432

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105604100259	56	2,160	Bright	sZ	2,808	SupplierStandard	1,432
103105603100259	56	2,160	Bright	zS	2,808	SupplierStandard	1,432
103105704250259	57	1,770	Galvanized	sZ	2,376	SupplierStandard	1,462
103105703250259	57	1,770	Galvanized	zS	2,376	SupplierStandard	1,462
103105704050259	57	1,770	Bright	sZ	2,376	SupplierStandard	1,462
103105703050259	57	1,770	Bright	zS	2,376	SupplierStandard	1,462
103105704270259	57	1,960	Galvanized	sZ	2,631	SupplierStandard	1,462
103105703270259	57	1,960	Galvanized	zS	2,631	SupplierStandard	1,462
103105704070259	57	1,960	Bright	sZ	2,631	SupplierStandard	1,462
103105703070259	57	1,960	Bright	zS	2,631	SupplierStandard	1,462
103105704300259	57	2,160	Galvanized	sZ	2,866	SupplierStandard	1,462
103105703300259	57	2,160	Galvanized	zS	2,866	SupplierStandard	1,462
103105704100259	57	2,160	Bright	sZ	2,866	SupplierStandard	1,462
103105703100259	57	2,160	Bright	zS	2,866	SupplierStandard	1,462
103105804250259	58	1,770	Galvanized	sZ	2,482	SupplierStandard	1,531
103105803250259	58	1,770	Galvanized	zS	2,482	SupplierStandard	1,531
103105804050259	58	1,770	Bright	sZ	2,482	SupplierStandard	1,531
103105803050259	58	1,770	Bright	zS	2,482	SupplierStandard	1,531
103105804270259	58	1,960	Galvanized	sZ	2,758	SupplierStandard	1,531
103105803270259	58	1,960	Galvanized	zS	2,758	SupplierStandard	1,531
103105804070259	58	1,960	Bright	sZ	2,758	SupplierStandard	1,531
103105803070259	58	1,960	Bright	zS	2,758	SupplierStandard	1,531
103105804300259	58	2,160	Galvanized	sZ	3,001	SupplierStandard	1,531
103105803300259	58	2,160	Galvanized	zS	3,001	SupplierStandard	1,531
103105804100259	58	2,160	Bright	sZ	3,001	SupplierStandard	1,531
103105803100259	58	2,160	Bright	zS	3,001	SupplierStandard	1,531
103105904250259	59	1,770	Galvanized	sZ	2,546	SupplierStandard	1,566
103105903250259	59	1,770	Galvanized	zS	2,546	SupplierStandard	1,566
103105904050259	59	1,770	Bright	sZ	2,546	SupplierStandard	1,566
103105903050259	59	1,770	Bright	zS	2,546	SupplierStandard	1,566
103105904270259	59	1,960	Galvanized	sZ	2,819	SupplierStandard	1,566

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105903270259	59	1,960	Galvanized	zS	2,819	SupplierStandard	1,566
103105904070259	59	1,960	Bright	sZ	2,819	SupplierStandard	1,566
103105903070259	59	1,960	Bright	zS	2,819	SupplierStandard	1,566
103105904300259	59	2,160	Galvanized	sZ	3,070	SupplierStandard	1,566
103105903300259	59	2,160	Galvanized	zS	3,070	SupplierStandard	1,566
103105904100259	59	2,160	Bright	sZ	3,070	SupplierStandard	1,566
103105903100259	59	2,160	Bright	zS	3,070	SupplierStandard	1,566
103106004250259	60	1,770	Galvanized	sZ	2,659	SupplierStandard	1,640
103106003250259	60	1,770	Galvanized	zS	2,659	SupplierStandard	1,640
103106004050259	60	1,770	Bright	sZ	2,659	SupplierStandard	1,640
103106003050259	60	1,770	Bright	zS	2,659	SupplierStandard	1,640
103106004270259	60	1,960	Galvanized	sZ	2,954	SupplierStandard	1,640
103106003270259	60	1,960	Galvanized	zS	2,954	SupplierStandard	1,640
103106004070259	60	1,960	Bright	sZ	2,954	SupplierStandard	1,640
103106003070259	60	1,960	Bright	zS	2,954	SupplierStandard	1,640
103106004300259	60	2,160	Galvanized	sZ	3,214	SupplierStandard	1,640
103106003300259	60	2,160	Galvanized	zS	3,214	SupplierStandard	1,640
103106004100259	60	2,160	Bright	sZ	3,214	SupplierStandard	1,640
103106003100259	60	2,160	Bright	zS	3,214	SupplierStandard	1,640
103106104250259	61	1,770	Galvanized	sZ	2,722	SupplierStandard	1,674
103106103250259	61	1,770	Galvanized	zS	2,722	SupplierStandard	1,674
103106104050259	61	1,770	Bright	sZ	2,722	SupplierStandard	1,674
103106103050259	61	1,770	Bright	zS	2,722	SupplierStandard	1,674
103106104270259	61	1,960	Galvanized	sZ	3,013	SupplierStandard	1,674
103106103270259	61	1,960	Galvanized	zS	3,013	SupplierStandard	1,674
103106104070259	61	1,960	Bright	sZ	3,013	SupplierStandard	1,674
103106103070259	61	1,960	Bright	zS	3,013	SupplierStandard	1,674
103106104300259	61	2,160	Galvanized	sZ	3,282	SupplierStandard	1,674
103106103300259	61	2,160	Galvanized	zS	3,282	SupplierStandard	1,674
103106104100259	61	2,160	Bright	sZ	3,282	SupplierStandard	1,674
103106103100259	61	2,160	Bright	zS	3,282	SupplierStandard	1,674

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106204250259	62	1,770	Galvanized	sZ	2,811	SupplierStandard	1,729
103106203250259	62	1,770	Galvanized	zS	2,811	SupplierStandard	1,729
103106204050259	62	1,770	Bright	sZ	2,811	SupplierStandard	1,729
103106203050259	62	1,770	Bright	zS	2,811	SupplierStandard	1,729
103106204270259	62	1,960	Galvanized	sZ	3,113	SupplierStandard	1,729
103106203270259	62	1,960	Galvanized	zS	3,113	SupplierStandard	1,729
103106204070259	62	1,960	Bright	sZ	3,113	SupplierStandard	1,729
103106203070259	62	1,960	Bright	zS	3,113	SupplierStandard	1,729
103106204300259	62	2,160	Galvanized	sZ	3,390	SupplierStandard	1,729
103106203300259	62	2,160	Galvanized	zS	3,390	SupplierStandard	1,729
103106204100259	62	2,160	Bright	sZ	3,390	SupplierStandard	1,729
103106203100259	62	2,160	Bright	zS	3,390	SupplierStandard	1,729
103106304250259	63	1,770	Galvanized	sZ	2,903	SupplierStandard	1,786
103106303250259	63	1,770	Galvanized	zS	2,903	SupplierStandard	1,786
103106304050259	63	1,770	Bright	sZ	2,903	SupplierStandard	1,786
103106303050259	63	1,770	Bright	zS	2,903	SupplierStandard	1,786
103106304270259	63	1,960	Galvanized	sZ	3,214	SupplierStandard	1,786
103106303270259	63	1,960	Galvanized	zS	3,214	SupplierStandard	1,786
103106304070259	63	1,960	Bright	sZ	3,214	SupplierStandard	1,786
103106303070259	63	1,960	Bright	zS	3,214	SupplierStandard	1,786
103106304300259	63	2,160	Galvanized	sZ	3,500	SupplierStandard	1,786
103106303300259	63	2,160	Galvanized	zS	3,500	SupplierStandard	1,786
103106304100259	63	2,160	Bright	sZ	3,500	SupplierStandard	1,786
103106303100259	63	2,160	Bright	zS	3,500	SupplierStandard	1,786
103106404250259	64	1,770	Galvanized	sZ	2,996	SupplierStandard	1,843
103106403250259	64	1,770	Galvanized	zS	2,996	SupplierStandard	1,843
103106404050259	64	1,770	Bright	sZ	2,996	SupplierStandard	1,843
103106403050259	64	1,770	Bright	zS	2,996	SupplierStandard	1,843
103106404270259	64	1,960	Galvanized	sZ	3,317	SupplierStandard	1,843
103106403270259	64	1,960	Galvanized	zS	3,317	SupplierStandard	1,843
103106404070259	64	1,960	Bright	sZ	3,317	SupplierStandard	1,843

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106403070259	64	1,960	Bright	zS	3,317	SupplierStandard	1,843
103106404300259	64	2,160	Galvanized	sZ	3,612	SupplierStandard	1,843
103106403300259	64	2,160	Galvanized	zS	3,612	SupplierStandard	1,843
103106404100259	64	2,160	Bright	sZ	3,612	SupplierStandard	1,843
103106403100259	64	2,160	Bright	zS	3,612	SupplierStandard	1,843
103106504250259	65	1,770	Galvanized	sZ	3,090	SupplierStandard	1,901
103106503250259	65	1,770	Galvanized	zS	3,090	SupplierStandard	1,901
103106504050259	65	1,770	Bright	sZ	3,090	SupplierStandard	1,901
103106503050259	65	1,770	Bright	zS	3,090	SupplierStandard	1,901
103106504270259	65	1,960	Galvanized	sZ	3,421	SupplierStandard	1,901
103106503270259	65	1,960	Galvanized	zS	3,421	SupplierStandard	1,901
103106504070259	65	1,960	Bright	sZ	3,421	SupplierStandard	1,901
103106503070259	65	1,960	Bright	zS	3,421	SupplierStandard	1,901
103106504300259	65	2,160	Galvanized	sZ	3,727	SupplierStandard	1,901
103106503300259	65	2,160	Galvanized	zS	3,727	SupplierStandard	1,901
103106504100259	65	2,160	Bright	sZ	3,727	SupplierStandard	1,901
103106503100259	65	2,160	Bright	zS	3,727	SupplierStandard	1,901
103106604250259	66	1,770	Galvanized	sZ	3,186	SupplierStandard	1,960
103106603250259	66	1,770	Galvanized	zS	3,186	SupplierStandard	1,960
103106604050259	66	1,770	Bright	sZ	3,186	SupplierStandard	1,960
103106603050259	66	1,770	Bright	zS	3,186	SupplierStandard	1,960
103106604270259	66	1,960	Galvanized	sZ	3,528	SupplierStandard	1,960
103106603270259	66	1,960	Galvanized	zS	3,528	SupplierStandard	1,960
103106604070259	66	1,960	Bright	sZ	3,528	SupplierStandard	1,960
103106603070259	66	1,960	Bright	zS	3,528	SupplierStandard	1,960
103106604300259	66	2,160	Galvanized	sZ	3,842	SupplierStandard	1,960
103106603300259	66	2,160	Galvanized	zS	3,842	SupplierStandard	1,960
103106604100259	66	2,160	Bright	sZ	3,842	SupplierStandard	1,960
103106603100259	66	2,160	Bright	zS	3,842	SupplierStandard	1,960
103106704250259	67	1,770	Galvanized	sZ	3,283	SupplierStandard	2,019
103106703250259	67	1,770	Galvanized	zS	3,283	SupplierStandard	2,019

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106704050259	67	1,770	Bright	sZ	3,283	SupplierStandard	2,019
103106703050259	67	1,770	Bright	zS	3,283	SupplierStandard	2,019
103106704270259	67	1,960	Galvanized	sZ	3,635	SupplierStandard	2,019
103106703270259	67	1,960	Galvanized	zS	3,635	SupplierStandard	2,019
103106704070259	67	1,960	Bright	sZ	3,635	SupplierStandard	2,019
103106703070259	67	1,960	Bright	zS	3,635	SupplierStandard	2,019
103106704300259	67	2,160	Galvanized	sZ	3,959	SupplierStandard	2,019
103106703300259	67	2,160	Galvanized	zS	3,959	SupplierStandard	2,019
103106704100259	67	2,160	Bright	sZ	3,959	SupplierStandard	2,019
103106703100259	67	2,160	Bright	zS	3,959	SupplierStandard	2,019
103106804250259	68	1,770	Galvanized	sZ	3,382	SupplierStandard	2,080
103106803250259	68	1,770	Galvanized	zS	3,382	SupplierStandard	2,080
103106804050259	68	1,770	Bright	sZ	3,382	SupplierStandard	2,080
103106803050259	68	1,770	Bright	zS	3,382	SupplierStandard	2,080
103106804270259	68	1,960	Galvanized	sZ	3,745	SupplierStandard	2,080
103106803270259	68	1,960	Galvanized	zS	3,745	SupplierStandard	2,080
103106804070259	68	1,960	Bright	sZ	3,745	SupplierStandard	2,080
103106803070259	68	1,960	Bright	zS	3,745	SupplierStandard	2,080
103106804300259	68	2,160	Galvanized	sZ	4,078	SupplierStandard	2,080
103106803300259	68	2,160	Galvanized	zS	4,078	SupplierStandard	2,080
103106804100259	68	2,160	Bright	sZ	4,078	SupplierStandard	2,080
103106803100259	68	2,160	Bright	zS	4,078	SupplierStandard	2,080
103106904250259	69	1,770	Galvanized	sZ	3,482	SupplierStandard	2,142
103106903250259	69	1,770	Galvanized	zS	3,482	SupplierStandard	2,142
103106904050259	69	1,770	Bright	sZ	3,482	SupplierStandard	2,142
103106903050259	69	1,770	Bright	zS	3,482	SupplierStandard	2,142
103106904270259	69	1,960	Galvanized	sZ	3,856	SupplierStandard	2,142
103106903270259	69	1,960	Galvanized	zS	3,856	SupplierStandard	2,142
103106904070259	69	1,960	Bright	sZ	3,856	SupplierStandard	2,142
103106903070259	69	1,960	Bright	zS	3,856	SupplierStandard	2,142
103106904300259	69	2,160	Galvanized	sZ	4,199	SupplierStandard	2,142

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106903300259	69	2,160	Galvanized	zS	4,199	SupplierStandard	2,142
103106904100259	69	2,160	Bright	sZ	4,199	SupplierStandard	2,142
103106903100259	69	2,160	Bright	zS	4,199	SupplierStandard	2,142
103107004250259	70	1,770	Galvanized	sZ	3,584	SupplierStandard	2,204
103107003250259	70	1,770	Galvanized	zS	3,584	SupplierStandard	2,204
103107004050259	70	1,770	Bright	sZ	3,584	SupplierStandard	2,204
103107003050259	70	1,770	Bright	zS	3,584	SupplierStandard	2,204
103107004270259	70	1,960	Galvanized	sZ	3,968	SupplierStandard	2,204
103107003270259	70	1,960	Galvanized	zS	3,968	SupplierStandard	2,204
103107004070259	70	1,960	Bright	sZ	3,968	SupplierStandard	2,204
103107003070259	70	1,960	Bright	zS	3,968	SupplierStandard	2,204
103107004300259	70	2,160	Galvanized	sZ	4,321	SupplierStandard	2,204
103107003300259	70	2,160	Galvanized	zS	4,321	SupplierStandard	2,204
103107004100259	70	2,160	Bright	sZ	4,321	SupplierStandard	2,204
103107003100259	70	2,160	Bright	zS	4,321	SupplierStandard	2,204
103107104250259	71	1,770	Galvanized	sZ	3,687	SupplierStandard	2,268
103107103250259	71	1,770	Galvanized	zS	3,687	SupplierStandard	2,268
103107104050259	71	1,770	Bright	sZ	3,687	SupplierStandard	2,268
103107103050259	71	1,770	Bright	zS	3,687	SupplierStandard	2,268
103107104270259	71	1,960	Galvanized	sZ	4,082	SupplierStandard	2,268
103107103270259	71	1,960	Galvanized	zS	4,082	SupplierStandard	2,268
103107104070259	71	1,960	Bright	sZ	4,082	SupplierStandard	2,268
103107103070259	71	1,960	Bright	zS	4,082	SupplierStandard	2,268
103107104300259	71	2,160	Galvanized	sZ	4,446	SupplierStandard	2,268
103107103300259	71	2,160	Galvanized	zS	4,446	SupplierStandard	2,268
103107104100259	71	2,160	Bright	sZ	4,446	SupplierStandard	2,268
103107103100259	71	2,160	Bright	zS	4,446	SupplierStandard	2,268
103107204250259	72	1,770	Galvanized	sZ	3,792	SupplierStandard	2,332
103107203250259	72	1,770	Galvanized	zS	3,792	SupplierStandard	2,332
103107204050259	72	1,770	Bright	sZ	3,792	SupplierStandard	2,332
103107203050259	72	1,770	Bright	zS	3,792	SupplierStandard	2,332

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103107204270259	72	1,960	Galvanized	sZ	4,198	SupplierStandard	2,332
103107203270259	72	1,960	Galvanized	zS	4,198	SupplierStandard	2,332
103107204070259	72	1,960	Bright	sZ	4,198	SupplierStandard	2,332
103107203070259	72	1,960	Bright	zS	4,198	SupplierStandard	2,332
103107204300259	72	2,160	Galvanized	sZ	4,572	SupplierStandard	2,332
103107203300259	72	2,160	Galvanized	zS	4,572	SupplierStandard	2,332
103107204100259	72	2,160	Bright	sZ	4,572	SupplierStandard	2,332
103107203100259	72	2,160	Bright	zS	4,572	SupplierStandard	2,332
103107304250259	73	1,770	Galvanized	sZ	3,897	SupplierStandard	2,397
103107303250259	73	1,770	Galvanized	zS	3,897	SupplierStandard	2,397
103107304050259	73	1,770	Bright	sZ	3,897	SupplierStandard	2,397
103107303050259	73	1,770	Bright	zS	3,897	SupplierStandard	2,397
103107304270259	73	1,960	Galvanized	sZ	4,315	SupplierStandard	2,397
103107303270259	73	1,960	Galvanized	zS	4,315	SupplierStandard	2,397
103107304070259	73	1,960	Bright	sZ	4,315	SupplierStandard	2,397
103107303070259	73	1,960	Bright	zS	4,315	SupplierStandard	2,397
103107304300259	73	2,160	Galvanized	sZ	4,700	SupplierStandard	2,397
103107303300259	73	2,160	Galvanized	zS	4,700	SupplierStandard	2,397
103107304100259	73	2,160	Bright	sZ	4,700	SupplierStandard	2,397
103107303100259	73	2,160	Bright	zS	4,700	SupplierStandard	2,397
103107404250259	74	1,770	Galvanized	sZ	4,005	SupplierStandard	2,463
103107403250259	74	1,770	Galvanized	zS	4,005	SupplierStandard	2,463
103107404050259	74	1,770	Bright	sZ	4,005	SupplierStandard	2,463
103107403050259	74	1,770	Bright	zS	4,005	SupplierStandard	2,463
103107404270259	74	1,960	Galvanized	sZ	4,435	SupplierStandard	2,463
103107403270259	74	1,960	Galvanized	zS	4,435	SupplierStandard	2,463
103107404070259	74	1,960	Bright	sZ	4,435	SupplierStandard	2,463
103107403070259	74	1,960	Bright	zS	4,435	SupplierStandard	2,463
103107404300259	74	2,160	Galvanized	sZ	4,830	SupplierStandard	2,463
103107403300259	74	2,160	Galvanized	zS	4,830	SupplierStandard	2,463
103107404100259	74	2,160	Bright	sZ	4,830	SupplierStandard	2,463

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X43

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103107403100259	74	2,160	Bright	zS	4,830	SupplierStandard	2,463
103107504250259	75	1,770	Galvanized	sZ	4,114	SupplierStandard	2,531
103107503250259	75	1,770	Galvanized	zS	4,114	SupplierStandard	2,531
103107504050259	75	1,770	Bright	sZ	4,114	SupplierStandard	2,531
103107503050259	75	1,770	Bright	zS	4,114	SupplierStandard	2,531
103107504270259	75	1,960	Galvanized	sZ	4,555	SupplierStandard	2,531
103107503270259	75	1,960	Galvanized	zS	4,555	SupplierStandard	2,531
103107504070259	75	1,960	Bright	sZ	4,555	SupplierStandard	2,531
103107503070259	75	1,960	Bright	zS	4,555	SupplierStandard	2,531
103107504300259	75	2,160	Galvanized	sZ	4,961	SupplierStandard	2,531
103107503300259	75	2,160	Galvanized	zS	4,961	SupplierStandard	2,531
103107504100259	75	2,160	Bright	sZ	4,961	SupplierStandard	2,531
103107503100259	75	2,160	Bright	zS	4,961	SupplierStandard	2,531

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved