


## Steel wire rope Diepa X43

### Product information

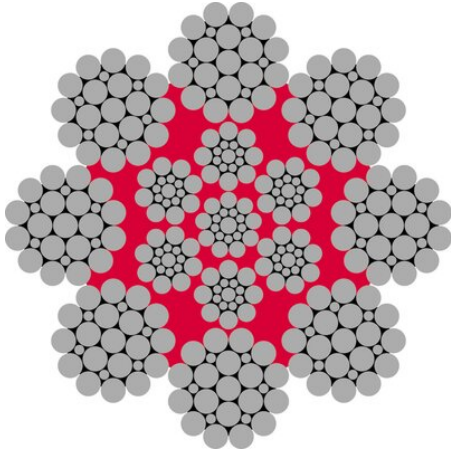

Diepa X43 is a non-rotation resistant, 8 strand wire rope with plastic insert.

**Applications:** For all different types of cranes where rotation resistant steel wire rope is not required, for example overhead travel cranes, floating dredges, mill's work cranes. For single-layer coiling on the drum.

**Lay:** Ordinary lay with internal plastic component.

**Total number of wires:** 4-14mm 201, 15-49mm 321, 50-69mm 409, 70-100mm 580.

**ISO 4309 Rope Category No:** 4-49mm **RCN.06**, 50-100mm **RCN.13**

[... Read more](#)

**Marking:** According to standard

**Finish:** Galvanized or bright.

**Standard:** EN 12385-4

**Warning:** Not to be used with a swivel.

**Fill factor:** 0.6226

**RCN:** 06

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103100404250259 | 4                   | 1,770                                 | Galvanized | sZ       | 11.7                      | -                             | SupplierStandard | 7                 |
| 103100403250259 | 4                   | 1,770                                 | Galvanized | zS       | 11.7                      | -                             | SupplierStandard | 7                 |
| 103100404050259 | 4                   | 1,770                                 | Bright     | sZ       | 11.7                      | -                             | SupplierStandard | 7                 |
| 103100403050259 | 4                   | 1,770                                 | Bright     | zS       | 11.7                      | -                             | SupplierStandard | 7                 |
| 103100404270259 | 4                   | 1,960                                 | Galvanized | sZ       | 13                        | -                             | SupplierStandard | 7                 |
| 103100403270259 | 4                   | 1,960                                 | Galvanized | zS       | 13                        | -                             | SupplierStandard | 7                 |
| 103100404070259 | 4                   | 1,960                                 | Bright     | sZ       | 13                        | -                             | SupplierStandard | 7                 |
| 103100403070259 | 4                   | 1,960                                 | Bright     | zS       | 13                        | -                             | SupplierStandard | 7                 |
| 103100404300259 | 4                   | 2,160                                 | Galvanized | sZ       | 14.1                      | -                             | SupplierStandard | 7                 |
| 103100403300259 | 4                   | 2,160                                 | Galvanized | zS       | 14.1                      | -                             | SupplierStandard | 7                 |
| 103100404100259 | 4                   | 2,160                                 | Bright     | sZ       | 14.1                      | -                             | SupplierStandard | 7                 |
| 103100403100259 | 4                   | 2,160                                 | Bright     | zS       | 14.1                      | -                             | SupplierStandard | 7                 |
| 103100504250259 | 5                   | 1,770                                 | Galvanized | sZ       | 18.3                      | -                             | SupplierStandard | 11                |
| 103100503250259 | 5                   | 1,770                                 | Galvanized | zS       | 18.3                      | -                             | SupplierStandard | 11                |
| 103100504050259 | 5                   | 1,770                                 | Bright     | sZ       | 18.3                      | -                             | SupplierStandard | 11                |
| 103100503050259 | 5                   | 1,770                                 | Bright     | zS       | 18.3                      | -                             | SupplierStandard | 11                |
| 103100504270259 | 5                   | 1,960                                 | Galvanized | sZ       | 20.2                      | -                             | SupplierStandard | 11                |
| 103100503270259 | 5                   | 1,960                                 | Galvanized | zS       | 20.2                      | -                             | SupplierStandard | 11                |
| 103100504070259 | 5                   | 1,960                                 | Bright     | sZ       | 20.2                      | -                             | SupplierStandard | 11                |
| 103100503070259 | 5                   | 1,960                                 | Bright     | zS       | 20.2                      | -                             | SupplierStandard | 11                |
| 103100504300259 | 5                   | 2,160                                 | Galvanized | sZ       | 22                        | -                             | SupplierStandard | 11                |
| 103100503300259 | 5                   | 2,160                                 | Galvanized | zS       | 22                        | -                             | SupplierStandard | 11                |
| 103100504100259 | 5                   | 2,160                                 | Bright     | sZ       | 22                        | -                             | SupplierStandard | 11                |
| 103100503100259 | 5                   | 2,160                                 | Bright     | zS       | 22                        | -                             | SupplierStandard | 11                |
| 103100604250259 | 6                   | 1,770                                 | Galvanized | sZ       | 26.3                      | -                             | SupplierStandard | 16                |
| 103100603250259 | 6                   | 1,770                                 | Galvanized | zS       | 26.3                      | -                             | SupplierStandard | 16                |
| 103100604050259 | 6                   | 1,770                                 | Bright     | sZ       | 26.3                      | -                             | SupplierStandard | 16                |
| 103100603050259 | 6                   | 1,770                                 | Bright     | zS       | 26.3                      | -                             | SupplierStandard | 16                |
| 103100604270259 | 6                   | 1,960                                 | Galvanized | sZ       | 29.2                      | -                             | SupplierStandard | 16                |
| 103100603270259 | 6                   | 1,960                                 | Galvanized | zS       | 29.2                      | -                             | SupplierStandard | 16                |
| 103100604070259 | 6                   | 1,960                                 | Bright     | sZ       | 29.2                      | -                             | SupplierStandard | 16                |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103100603070259 | 6                   | 1,960                                 | Bright     | zS       | 29.2                      | -                             | SupplierStandard | 16                |
| 103100604300259 | 6                   | 2,160                                 | Galvanized | sZ       | 31.7                      | -                             | SupplierStandard | 16                |
| 103100603300259 | 6                   | 2,160                                 | Galvanized | zS       | 31.7                      | -                             | SupplierStandard | 16                |
| 103100604100259 | 6                   | 2,160                                 | Bright     | sZ       | 31.7                      | -                             | SupplierStandard | 16                |
| 103100603100259 | 6                   | 2,160                                 | Bright     | zS       | 31.7                      | -                             | SupplierStandard | 16                |
| 103100654250259 | 6.5                 | 1,770                                 | Galvanized | sZ       | 30.9                      | -                             | SupplierStandard | 19                |
| 103100653250259 | 6.5                 | 1,770                                 | Galvanized | zS       | 30.9                      | -                             | SupplierStandard | 19                |
| 103100654050259 | 6.5                 | 1,770                                 | Bright     | sZ       | 30.9                      | -                             | SupplierStandard | 19                |
| 103100653050259 | 6.5                 | 1,770                                 | Bright     | zS       | 30.9                      | -                             | SupplierStandard | 19                |
| 103100654270259 | 6.5                 | 1,960                                 | Galvanized | sZ       | 34.2                      | -                             | SupplierStandard | 19                |
| 103100653270259 | 6.5                 | 1,960                                 | Galvanized | zS       | 34.2                      | -                             | SupplierStandard | 19                |
| 103100654070259 | 6.5                 | 1,960                                 | Bright     | sZ       | 34.2                      | -                             | SupplierStandard | 19                |
| 103100653070259 | 6.5                 | 1,960                                 | Bright     | zS       | 34.2                      | -                             | SupplierStandard | 19                |
| 103100654300259 | 6.5                 | 2,160                                 | Galvanized | sZ       | 37.3                      | -                             | SupplierStandard | 19                |
| 103100653300259 | 6.5                 | 2,160                                 | Galvanized | zS       | 37.3                      | -                             | SupplierStandard | 19                |
| 103100654100259 | 6.5                 | 2,160                                 | Bright     | sZ       | 37.3                      | -                             | SupplierStandard | 19                |
| 103100653100259 | 6.5                 | 2,160                                 | Bright     | zS       | 37.3                      | -                             | SupplierStandard | 19                |
| 103100704250259 | 7                   | 1,770                                 | Galvanized | sZ       | 35.8                      | -                             | SupplierStandard | 22                |
| 103100703250259 | 7                   | 1,770                                 | Galvanized | zS       | 35.8                      | -                             | SupplierStandard | 22                |
| 103100704050259 | 7                   | 1,770                                 | Bright     | sZ       | 35.8                      | -                             | SupplierStandard | 22                |
| 103100703050259 | 7                   | 1,770                                 | Bright     | zS       | 35.8                      | -                             | SupplierStandard | 22                |
| 103100704270259 | 7                   | 1,960                                 | Galvanized | sZ       | 39.7                      | -                             | SupplierStandard | 22                |
| 103100703270259 | 7                   | 1,960                                 | Galvanized | zS       | 39.7                      | -                             | SupplierStandard | 22                |
| 103100704070259 | 7                   | 1,960                                 | Bright     | sZ       | 39.7                      | -                             | SupplierStandard | 22                |
| 103100703070259 | 7                   | 1,960                                 | Bright     | zS       | 39.7                      | -                             | SupplierStandard | 22                |
| 103100704300259 | 7                   | 2,160                                 | Galvanized | sZ       | 43.2                      | -                             | SupplierStandard | 22                |
| 103100703300259 | 7                   | 2,160                                 | Galvanized | zS       | 43.2                      | -                             | SupplierStandard | 22                |
| 103100704100259 | 7                   | 2,160                                 | Bright     | sZ       | 43.2                      | -                             | SupplierStandard | 22                |
| 103100703100259 | 7                   | 2,160                                 | Bright     | zS       | 43.2                      | -                             | SupplierStandard | 22                |
| 103100754250259 | 7.5                 | 1,770                                 | Galvanized | sZ       | 41.1                      | -                             | SupplierStandard | 25                |
| 103100753250259 | 7.5                 | 1,770                                 | Galvanized | zS       | 41.1                      | -                             | SupplierStandard | 25                |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103100754050259 | 7.5                 | 1,770                                 | Bright     | sZ       | 41.1                      | -                             | SupplierStandard | 25                |
| 103100753050259 | 7.5                 | 1,770                                 | Bright     | zS       | 41.1                      | -                             | SupplierStandard | 25                |
| 103100754270259 | 7.5                 | 1,960                                 | Galvanized | sZ       | 45.6                      | -                             | SupplierStandard | 25                |
| 103100753270259 | 7.5                 | 1,960                                 | Galvanized | zS       | 45.6                      | -                             | SupplierStandard | 25                |
| 103100754070259 | 7.5                 | 1,960                                 | Bright     | sZ       | 45.6                      | -                             | SupplierStandard | 25                |
| 103100753070259 | 7.5                 | 1,960                                 | Bright     | zS       | 45.6                      | -                             | SupplierStandard | 25                |
| 103100754300259 | 7.5                 | 2,160                                 | Galvanized | sZ       | 49.6                      | -                             | SupplierStandard | 25                |
| 103100753300259 | 7.5                 | 2,160                                 | Galvanized | zS       | 49.6                      | -                             | SupplierStandard | 25                |
| 103100754100259 | 7.5                 | 2,160                                 | Bright     | sZ       | 49.6                      | -                             | SupplierStandard | 25                |
| 103100753100259 | 7.5                 | 2,160                                 | Bright     | zS       | 49.6                      | -                             | SupplierStandard | 25                |
| 103100804250259 | 8                   | 1,770                                 | Galvanized | sZ       | 43.7                      | -                             | SupplierStandard | 27                |
| 103100803250259 | 8                   | 1,770                                 | Galvanized | zS       | 43.7                      | -                             | SupplierStandard | 27                |
| 103100804050259 | 8                   | 1,770                                 | Bright     | sZ       | 43.7                      | -                             | SupplierStandard | 27                |
| 103100803050259 | 8                   | 1,770                                 | Bright     | zS       | 43.7                      | -                             | SupplierStandard | 27                |
| 103100804270259 | 8                   | 1,960                                 | Galvanized | sZ       | 48.6                      | -                             | SupplierStandard | 27                |
| 103100803270259 | 8                   | 1,960                                 | Galvanized | zS       | 48.6                      | -                             | SupplierStandard | 27                |
| 103100804070259 | 8                   | 1,960                                 | Bright     | sZ       | 48.6                      | -                             | SupplierStandard | 27                |
| 103100803070259 | 8                   | 1,960                                 | Bright     | zS       | 48.6                      | -                             | SupplierStandard | 27                |
| 103100804300259 | 8                   | 2,160                                 | Galvanized | sZ       | 53.4                      | -                             | SupplierStandard | 27                |
| 103100803300259 | 8                   | 2,160                                 | Galvanized | zS       | 53.4                      | -                             | SupplierStandard | 27                |
| 103100804100259 | 8                   | 2,160                                 | Bright     | sZ       | 53.4                      | -                             | SupplierStandard | 27                |
| 103100803100259 | 8                   | 2,160                                 | Bright     | zS       | 53.4                      | -                             | SupplierStandard | 27                |
| 103100854250259 | 8.5                 | 1,770                                 | Galvanized | sZ       | 52.8                      | -                             | SupplierStandard | 33                |
| 103100853250259 | 8.5                 | 1,770                                 | Galvanized | zS       | 52.8                      | -                             | SupplierStandard | 33                |
| 103100854050259 | 8.5                 | 1,770                                 | Bright     | sZ       | 52.8                      | -                             | SupplierStandard | 33                |
| 103100853050259 | 8.5                 | 1,770                                 | Bright     | zS       | 52.8                      | -                             | SupplierStandard | 33                |
| 103100854270259 | 8.5                 | 1,960                                 | Galvanized | sZ       | 58.5                      | -                             | SupplierStandard | 33                |
| 103100853270259 | 8.5                 | 1,960                                 | Galvanized | zS       | 58.5                      | -                             | SupplierStandard | 33                |
| 103100854070259 | 8.5                 | 1,960                                 | Bright     | sZ       | 58.5                      | -                             | SupplierStandard | 33                |
| 103100853070259 | 8.5                 | 1,960                                 | Bright     | zS       | 58.5                      | -                             | SupplierStandard | 33                |
| 103100854300259 | 8.5                 | 2,160                                 | Galvanized | sZ       | 63.7                      | -                             | SupplierStandard | 33                |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103100853300259 | 8.5                 | 2,160                                 | Galvanized | zS       | 63.7                      | -                             | SupplierStandard | 33                |
| 103100854100259 | 8.5                 | 2,160                                 | Bright     | sZ       | 63.7                      | -                             | SupplierStandard | 33                |
| 103100853100259 | 8.5                 | 2,160                                 | Bright     | zS       | 63.7                      | -                             | SupplierStandard | 33                |
| 103100904250259 | 9                   | 1,770                                 | Galvanized | sZ       | 56.9                      | -                             | SupplierStandard | 35                |
| 103100903250259 | 9                   | 1,770                                 | Galvanized | zS       | 56.9                      | -                             | SupplierStandard | 35                |
| 103100904050259 | 9                   | 1,770                                 | Bright     | sZ       | 56.9                      | -                             | SupplierStandard | 35                |
| 103100903050259 | 9                   | 1,770                                 | Bright     | zS       | 56.9                      | -                             | SupplierStandard | 35                |
| 103100904270259 | 9                   | 1,960                                 | Galvanized | sZ       | 63.3                      | -                             | SupplierStandard | 35                |
| 103100903270259 | 9                   | 1,960                                 | Galvanized | zS       | 63.3                      | -                             | SupplierStandard | 35                |
| 103100904070259 | 9                   | 1,960                                 | Bright     | sZ       | 63.3                      | -                             | SupplierStandard | 35                |
| 103100903070259 | 9                   | 1,960                                 | Bright     | zS       | 63.3                      | -                             | SupplierStandard | 35                |
| 103100904300259 | 9                   | 2,160                                 | Galvanized | sZ       | 69.3                      | -                             | SupplierStandard | 35                |
| 103100903300259 | 9                   | 2,160                                 | Galvanized | zS       | 69.3                      | -                             | SupplierStandard | 35                |
| 103100904100259 | 9                   | 2,160                                 | Bright     | sZ       | 69.3                      | -                             | SupplierStandard | 35                |
| 103100903100259 | 9                   | 2,160                                 | Bright     | zS       | 69.3                      | -                             | SupplierStandard | 35                |
| 103100954250259 | 9.5                 | 1,770                                 | Galvanized | sZ       | 66                        | -                             | SupplierStandard | 41                |
| 103100953250259 | 9.5                 | 1,770                                 | Galvanized | zS       | 66                        | -                             | SupplierStandard | 41                |
| 103100954050259 | 9.5                 | 1,770                                 | Bright     | sZ       | 66                        | -                             | SupplierStandard | 41                |
| 103100953050259 | 9.5                 | 1,770                                 | Bright     | zS       | 66                        | -                             | SupplierStandard | 41                |
| 103100954270259 | 9.5                 | 1,960                                 | Galvanized | sZ       | 73.1                      | -                             | SupplierStandard | 41                |
| 103100953270259 | 9.5                 | 1,960                                 | Galvanized | zS       | 73.1                      | -                             | SupplierStandard | 41                |
| 103100954070259 | 9.5                 | 1,960                                 | Bright     | sZ       | 73.1                      | -                             | SupplierStandard | 41                |
| 103100953070259 | 9.5                 | 1,960                                 | Bright     | zS       | 73.1                      | -                             | SupplierStandard | 41                |
| 103100954300259 | 9.5                 | 2,160                                 | Galvanized | sZ       | 79.6                      | -                             | SupplierStandard | 41                |
| 103100953300259 | 9.5                 | 2,160                                 | Galvanized | zS       | 79.6                      | -                             | SupplierStandard | 41                |
| 103100954100259 | 9.5                 | 2,160                                 | Bright     | sZ       | 79.6                      | -                             | SupplierStandard | 41                |
| 103100953100259 | 9.5                 | 2,160                                 | Bright     | zS       | 79.6                      | -                             | SupplierStandard | 41                |
| 103101004250259 | 10                  | 1,770                                 | Galvanized | sZ       | 68.2                      | -                             | SupplierStandard | 42                |
| 103101003250259 | 10                  | 1,770                                 | Galvanized | zS       | 68.2                      | -                             | SupplierStandard | 42                |
| 103101004050259 | 10                  | 1,770                                 | Bright     | sZ       | 68.2                      | -                             | SupplierStandard | 42                |
| 103101003050259 | 10                  | 1,770                                 | Bright     | zS       | 68.2                      | -                             | SupplierStandard | 42                |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103101004270259 | 10                  | 1,960                                 | Galvanized | sZ       | 76                        | -                             | SupplierStandard | 42                |
| 103101003270259 | 10                  | 1,960                                 | Galvanized | zS       | 76                        | -                             | SupplierStandard | 42                |
| 103101004070259 | 10                  | 1,960                                 | Bright     | sZ       | 76                        | -                             | SupplierStandard | 42                |
| 103101003070259 | 10                  | 1,960                                 | Bright     | zS       | 76                        | -                             | SupplierStandard | 42                |
| 103101004300259 | 10                  | 2,160                                 | Galvanized | sZ       | 83                        | -                             | SupplierStandard | 42                |
| 103101003300259 | 10                  | 2,160                                 | Galvanized | zS       | 83                        | -                             | SupplierStandard | 42                |
| 103101004100259 | 10                  | 2,160                                 | Bright     | sZ       | 83                        | -                             | SupplierStandard | 42                |
| 103101003100259 | 10                  | 2,160                                 | Bright     | zS       | 83                        | -                             | SupplierStandard | 42                |
| 103101104250259 | 11                  | 1,770                                 | Galvanized | sZ       | 86.3                      | -                             | SupplierStandard | 54                |
| 103101103250259 | 11                  | 1,770                                 | Galvanized | zS       | 86.3                      | -                             | SupplierStandard | 54                |
| 103101104050259 | 11                  | 1,770                                 | Bright     | sZ       | 86.3                      | -                             | SupplierStandard | 54                |
| 103101103050259 | 11                  | 1,770                                 | Bright     | zS       | 86.3                      | -                             | SupplierStandard | 54                |
| 103101104270259 | 11                  | 1,960                                 | Galvanized | sZ       | 96.1                      | -                             | SupplierStandard | 54                |
| 103101103270259 | 11                  | 1,960                                 | Galvanized | zS       | 96.1                      | -                             | SupplierStandard | 54                |
| 103101104070259 | 11                  | 1,960                                 | Bright     | sZ       | 96.1                      | -                             | SupplierStandard | 54                |
| 103101103070259 | 11                  | 1,960                                 | Bright     | zS       | 96.1                      | -                             | SupplierStandard | 54                |
| 103101104300259 | 11                  | 2,160                                 | Galvanized | sZ       | 105                       | -                             | SupplierStandard | 54                |
| 103101103300259 | 11                  | 2,160                                 | Galvanized | zS       | 105                       | -                             | SupplierStandard | 54                |
| 103101104100259 | 11                  | 2,160                                 | Bright     | sZ       | 105                       | -                             | SupplierStandard | 54                |
| 103101103100259 | 11                  | 2,160                                 | Bright     | zS       | 105                       | -                             | SupplierStandard | 54                |
| 103101204250259 | 12                  | 1,770                                 | Galvanized | sZ       | 106                       | -                             | SupplierStandard | 65                |
| 103101203250259 | 12                  | 1,770                                 | Galvanized | zS       | 106                       | -                             | SupplierStandard | 65                |
| 103101204050259 | 12                  | 1,770                                 | Bright     | sZ       | 106                       | -                             | SupplierStandard | 65                |
| 103101203050259 | 12                  | 1,770                                 | Bright     | zS       | 106                       | -                             | SupplierStandard | 65                |
| 103101204270259 | 12                  | 1,960                                 | Galvanized | sZ       | 118                       | -                             | SupplierStandard | 65                |
| 103101203270259 | 12                  | 1,960                                 | Galvanized | zS       | 118                       | -                             | SupplierStandard | 65                |
| 103101204070259 | 12                  | 1,960                                 | Bright     | sZ       | 118                       | -                             | SupplierStandard | 65                |
| 103101203070259 | 12                  | 1,960                                 | Bright     | zS       | 118                       | -                             | SupplierStandard | 65                |
| 103101204300259 | 12                  | 2,160                                 | Galvanized | sZ       | 129                       | -                             | SupplierStandard | 65                |
| 103101203300259 | 12                  | 2,160                                 | Galvanized | zS       | 129                       | -                             | SupplierStandard | 65                |
| 103101204100259 | 12                  | 2,160                                 | Bright     | sZ       | 129                       | -                             | SupplierStandard | 65                |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103101203100259 | 12                  | 2,160                                 | Bright     | zS       | 129                       | -                             | SupplierStandard | 65                |
| 103101304250259 | 13                  | 1,770                                 | Galvanized | sZ       | 122                       | -                             | SupplierStandard | 76                |
| 103101303250259 | 13                  | 1,770                                 | Galvanized | zS       | 122                       | -                             | SupplierStandard | 76                |
| 103101304050259 | 13                  | 1,770                                 | Bright     | sZ       | 122                       | -                             | SupplierStandard | 76                |
| 103101303050259 | 13                  | 1,770                                 | Bright     | zS       | 122                       | -                             | SupplierStandard | 76                |
| 103101304270259 | 13                  | 1,960                                 | Galvanized | sZ       | 136                       | -                             | SupplierStandard | 76                |
| 103101303270259 | 13                  | 1,960                                 | Galvanized | zS       | 136                       | -                             | SupplierStandard | 76                |
| 103101304070259 | 13                  | 1,960                                 | Bright     | sZ       | 136                       | -                             | SupplierStandard | 76                |
| 103101303070259 | 13                  | 1,960                                 | Bright     | zS       | 136                       | -                             | SupplierStandard | 76                |
| 103101304300259 | 13                  | 2,160                                 | Galvanized | sZ       | 148                       | -                             | SupplierStandard | 76                |
| 103101303300259 | 13                  | 2,160                                 | Galvanized | zS       | 148                       | -                             | SupplierStandard | 76                |
| 103101304100259 | 13                  | 2,160                                 | Bright     | sZ       | 148                       | -                             | SupplierStandard | 76                |
| 103101303100259 | 13                  | 2,160                                 | Bright     | zS       | 148                       | -                             | SupplierStandard | 76                |
| 103101404250259 | 14                  | 1,770                                 | Galvanized | sZ       | 137                       | -                             | SupplierStandard | 85                |
| 103101403250259 | 14                  | 1,770                                 | Galvanized | zS       | 137                       | -                             | SupplierStandard | 85                |
| 103101404050259 | 14                  | 1,770                                 | Bright     | sZ       | 137                       | -                             | SupplierStandard | 85                |
| 103101403050259 | 14                  | 1,770                                 | Bright     | zS       | 137                       | -                             | SupplierStandard | 85                |
| 103101404270259 | 14                  | 1,960                                 | Galvanized | sZ       | 152                       | -                             | SupplierStandard | 85                |
| 103101403270259 | 14                  | 1,960                                 | Galvanized | zS       | 152                       | -                             | SupplierStandard | 85                |
| 103101404070259 | 14                  | 1,960                                 | Bright     | sZ       | 152                       | -                             | SupplierStandard | 85                |
| 103101403070259 | 14                  | 1,960                                 | Bright     | zS       | 152                       | -                             | SupplierStandard | 85                |
| 103101404300259 | 14                  | 2,160                                 | Galvanized | sZ       | 166                       | -                             | SupplierStandard | 85                |
| 103101403300259 | 14                  | 2,160                                 | Galvanized | zS       | 166                       | -                             | SupplierStandard | 85                |
| 103101404100259 | 14                  | 2,160                                 | Bright     | sZ       | 166                       | -                             | SupplierStandard | 85                |
| 103101403100259 | 14                  | 2,160                                 | Bright     | zS       | 166                       | -                             | SupplierStandard | 85                |
| 103101504250259 | 15                  | 1,770                                 | Galvanized | sZ       | 166                       | -                             | SupplierStandard | 103               |
| 103101503250259 | 15                  | 1,770                                 | Galvanized | zS       | 166                       | -                             | SupplierStandard | 103               |
| 103101504050259 | 15                  | 1,770                                 | Bright     | sZ       | 166                       | -                             | SupplierStandard | 103               |
| 103101503050259 | 15                  | 1,770                                 | Bright     | zS       | 166                       | -                             | SupplierStandard | 103               |
| 103101504270259 | 15                  | 1,960                                 | Galvanized | sZ       | 184                       | -                             | SupplierStandard | 103               |
| 103101503270259 | 15                  | 1,960                                 | Galvanized | zS       | 184                       | -                             | SupplierStandard | 103               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103101504070259 | 15                  | 1,960                                 | Bright     | sZ       | 184                       | -                             | SupplierStandard | 103               |
| 103101503070259 | 15                  | 1,960                                 | Bright     | zS       | 184                       | -                             | SupplierStandard | 103               |
| 103101504300259 | 15                  | 2,160                                 | Galvanized | sZ       | 201                       | -                             | SupplierStandard | 103               |
| 103101503300259 | 15                  | 2,160                                 | Galvanized | zS       | 201                       | -                             | SupplierStandard | 103               |
| 103101504100259 | 15                  | 2,160                                 | Bright     | sZ       | 201                       | -                             | SupplierStandard | 103               |
| 103101503100259 | 15                  | 2,160                                 | Bright     | zS       | 201                       | -                             | SupplierStandard | 103               |
| 103101604250259 | 16                  | 1,770                                 | Galvanized | sZ       | 187                       | -                             | SupplierStandard | 116               |
| 103101603250259 | 16                  | 1,770                                 | Galvanized | zS       | 187                       | -                             | SupplierStandard | 116               |
| 103101604050259 | 16                  | 1,770                                 | Bright     | sZ       | 187                       | -                             | SupplierStandard | 116               |
| 103101603050259 | 16                  | 1,770                                 | Bright     | zS       | 187                       | -                             | SupplierStandard | 116               |
| 103101604270259 | 16                  | 1,960                                 | Galvanized | sZ       | 208                       | -                             | SupplierStandard | 116               |
| 103101603270259 | 16                  | 1,960                                 | Galvanized | zS       | 208                       | -                             | SupplierStandard | 116               |
| 103101604070259 | 16                  | 1,960                                 | Bright     | sZ       | 208                       | -                             | SupplierStandard | 116               |
| 103101603070259 | 16                  | 1,960                                 | Bright     | zS       | 208                       | -                             | SupplierStandard | 116               |
| 103101604300259 | 16                  | 2,160                                 | Galvanized | sZ       | 227                       | -                             | SupplierStandard | 116               |
| 103101603300259 | 16                  | 2,160                                 | Galvanized | zS       | 227                       | -                             | SupplierStandard | 116               |
| 103101604100259 | 16                  | 2,160                                 | Bright     | sZ       | 227                       | -                             | SupplierStandard | 116               |
| 103101603100259 | 16                  | 2,160                                 | Bright     | zS       | 227                       | -                             | SupplierStandard | 116               |
| 103101704250259 | 17                  | 1,770                                 | Galvanized | sZ       | 210                       | -                             | SupplierStandard | 130               |
| 103101703250259 | 17                  | 1,770                                 | Galvanized | zS       | 210                       | -                             | SupplierStandard | 130               |
| 103101704050259 | 17                  | 1,770                                 | Bright     | sZ       | 210                       | -                             | SupplierStandard | 130               |
| 103101703050259 | 17                  | 1,770                                 | Bright     | zS       | 210                       | -                             | SupplierStandard | 130               |
| 103101704270259 | 17                  | 1,960                                 | Galvanized | sZ       | 233                       | -                             | SupplierStandard | 130               |
| 103101703270259 | 17                  | 1,960                                 | Galvanized | zS       | 233                       | -                             | SupplierStandard | 130               |
| 103101704070259 | 17                  | 1,960                                 | Bright     | sZ       | 233                       | -                             | SupplierStandard | 130               |
| 103101703070259 | 17                  | 1,960                                 | Bright     | zS       | 233                       | -                             | SupplierStandard | 130               |
| 103101704300259 | 17                  | 2,160                                 | Galvanized | sZ       | 254                       | -                             | SupplierStandard | 130               |
| 103101703300259 | 17                  | 2,160                                 | Galvanized | zS       | 254                       | -                             | SupplierStandard | 130               |
| 103101704100259 | 17                  | 2,160                                 | Bright     | sZ       | 254                       | -                             | SupplierStandard | 130               |
| 103101703100259 | 17                  | 2,160                                 | Bright     | zS       | 254                       | -                             | SupplierStandard | 130               |
| 103101804250259 | 18                  | 1,770                                 | Galvanized | sZ       | 236                       | -                             | SupplierStandard | 146               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103101803250259 | 18                  | 1,770                                 | Galvanized | zS       | 236                       | -                             | SupplierStandard | 146               |
| 103101804050259 | 18                  | 1,770                                 | Bright     | sZ       | 236                       | -                             | SupplierStandard | 146               |
| 103101803050259 | 18                  | 1,770                                 | Bright     | zS       | 236                       | -                             | SupplierStandard | 146               |
| 103101804270259 | 18                  | 1,960                                 | Galvanized | sZ       | 262                       | -                             | SupplierStandard | 146               |
| 103101803270259 | 18                  | 1,960                                 | Galvanized | zS       | 262                       | -                             | SupplierStandard | 146               |
| 103101804070259 | 18                  | 1,960                                 | Bright     | sZ       | 262                       | -                             | SupplierStandard | 146               |
| 103101803070259 | 18                  | 1,960                                 | Bright     | zS       | 262                       | -                             | SupplierStandard | 146               |
| 103101804300259 | 18                  | 2,160                                 | Galvanized | sZ       | 286                       | -                             | SupplierStandard | 146               |
| 103101803300259 | 18                  | 2,160                                 | Galvanized | zS       | 286                       | -                             | SupplierStandard | 146               |
| 103101804100259 | 18                  | 2,160                                 | Bright     | sZ       | 286                       | -                             | SupplierStandard | 146               |
| 103101803100259 | 18                  | 2,160                                 | Bright     | zS       | 286                       | -                             | SupplierStandard | 146               |
| 103101904250259 | 19                  | 1,770                                 | Galvanized | sZ       | 260                       | -                             | SupplierStandard | 161               |
| 103101903250259 | 19                  | 1,770                                 | Galvanized | zS       | 260                       | -                             | SupplierStandard | 161               |
| 103101904050259 | 19                  | 1,770                                 | Bright     | sZ       | 260                       | -                             | SupplierStandard | 161               |
| 103101903050259 | 19                  | 1,770                                 | Bright     | zS       | 260                       | -                             | SupplierStandard | 161               |
| 103101904270259 | 19                  | 1,960                                 | Galvanized | sZ       | 289                       | -                             | SupplierStandard | 161               |
| 103101903270259 | 19                  | 1,960                                 | Galvanized | zS       | 289                       | -                             | SupplierStandard | 161               |
| 103101904070259 | 19                  | 1,960                                 | Bright     | sZ       | 289                       | -                             | SupplierStandard | 161               |
| 103101903070259 | 19                  | 1,960                                 | Bright     | zS       | 289                       | -                             | SupplierStandard | 161               |
| 103101904300259 | 19                  | 2,160                                 | Galvanized | sZ       | 316                       | -                             | SupplierStandard | 161               |
| 103101903300259 | 19                  | 2,160                                 | Galvanized | zS       | 316                       | -                             | SupplierStandard | 161               |
| 103101904100259 | 19                  | 2,160                                 | Bright     | sZ       | 316                       | -                             | SupplierStandard | 161               |
| 103101903100259 | 19                  | 2,160                                 | Bright     | zS       | 316                       | -                             | SupplierStandard | 161               |
| 103102004250259 | 20                  | 1,770                                 | Galvanized | sZ       | 288                       | -                             | SupplierStandard | 178               |
| 103102003250259 | 20                  | 1,770                                 | Galvanized | zS       | 288                       | -                             | SupplierStandard | 178               |
| 103102004050259 | 20                  | 1,770                                 | Bright     | sZ       | 288                       | -                             | SupplierStandard | 178               |
| 103102003050259 | 20                  | 1,770                                 | Bright     | zS       | 288                       | -                             | SupplierStandard | 178               |
| 103102004270259 | 20                  | 1,960                                 | Galvanized | sZ       | 320                       | -                             | SupplierStandard | 178               |
| 103102003270259 | 20                  | 1,960                                 | Galvanized | zS       | 320                       | -                             | SupplierStandard | 178               |
| 103102004070259 | 20                  | 1,960                                 | Bright     | sZ       | 320                       | -                             | SupplierStandard | 178               |
| 103102003070259 | 20                  | 1,960                                 | Bright     | zS       | 320                       | -                             | SupplierStandard | 178               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103102004300259 | 20                  | 2,160                                 | Galvanized | sZ       | 348                       | -                             | SupplierStandard | 178               |
| 103102003300259 | 20                  | 2,160                                 | Galvanized | zS       | 348                       | -                             | SupplierStandard | 178               |
| 103102004100259 | 20                  | 2,160                                 | Bright     | sZ       | 348                       | -                             | SupplierStandard | 178               |
| 103102003100259 | 20                  | 2,160                                 | Bright     | zS       | 348                       | -                             | SupplierStandard | 178               |
| 103102104250259 | 21                  | 1,770                                 | Galvanized | sZ       | 315                       | -                             | SupplierStandard | 195               |
| 103102103250259 | 21                  | 1,770                                 | Galvanized | zS       | 315                       | -                             | SupplierStandard | 195               |
| 103102104050259 | 21                  | 1,770                                 | Bright     | sZ       | 315                       | -                             | SupplierStandard | 195               |
| 103102103050259 | 21                  | 1,770                                 | Bright     | zS       | 315                       | -                             | SupplierStandard | 195               |
| 103102104270259 | 21                  | 1,960                                 | Galvanized | sZ       | 351                       | -                             | SupplierStandard | 195               |
| 103102103270259 | 21                  | 1,960                                 | Galvanized | zS       | 351                       | -                             | SupplierStandard | 195               |
| 103102104070259 | 21                  | 1,960                                 | Bright     | sZ       | 351                       | -                             | SupplierStandard | 195               |
| 103102103070259 | 21                  | 1,960                                 | Bright     | zS       | 351                       | -                             | SupplierStandard | 195               |
| 103102104300259 | 21                  | 2,160                                 | Galvanized | sZ       | 382                       | -                             | SupplierStandard | 195               |
| 103102103300259 | 21                  | 2,160                                 | Galvanized | zS       | 382                       | -                             | SupplierStandard | 195               |
| 103102104100259 | 21                  | 2,160                                 | Bright     | sZ       | 382                       | -                             | SupplierStandard | 195               |
| 103102103100259 | 21                  | 2,160                                 | Bright     | zS       | 382                       | -                             | SupplierStandard | 195               |
| 103102204250259 | 22                  | 1,770                                 | Galvanized | sZ       | 361                       | -                             | SupplierStandard | 223               |
| 103102203250259 | 22                  | 1,770                                 | Galvanized | zS       | 361                       | -                             | SupplierStandard | 223               |
| 103102204050259 | 22                  | 1,770                                 | Bright     | sZ       | 361                       | -                             | SupplierStandard | 223               |
| 103102203050259 | 22                  | 1,770                                 | Bright     | zS       | 361                       | -                             | SupplierStandard | 223               |
| 103102204270259 | 22                  | 1,960                                 | Galvanized | sZ       | 401                       | -                             | SupplierStandard | 223               |
| 103102203270259 | 22                  | 1,960                                 | Galvanized | zS       | 401                       | -                             | SupplierStandard | 223               |
| 103102204070259 | 22                  | 1,960                                 | Bright     | sZ       | 401                       | -                             | SupplierStandard | 223               |
| 103102203070259 | 22                  | 1,960                                 | Bright     | zS       | 401                       | -                             | SupplierStandard | 223               |
| 103102204300259 | 22                  | 2,160                                 | Galvanized | sZ       | 437                       | -                             | SupplierStandard | 223               |
| 103102203300259 | 22                  | 2,160                                 | Galvanized | zS       | 437                       | -                             | SupplierStandard | 223               |
| 103102204100259 | 22                  | 2,160                                 | Bright     | sZ       | 437                       | -                             | SupplierStandard | 223               |
| 103102203100259 | 22                  | 2,160                                 | Bright     | zS       | 437                       | -                             | SupplierStandard | 223               |
| 103102304250259 | 23                  | 1,770                                 | Galvanized | sZ       | 390                       | -                             | SupplierStandard | 241               |
| 103102303250259 | 23                  | 1,770                                 | Galvanized | zS       | 390                       | -                             | SupplierStandard | 241               |
| 103102304050259 | 23                  | 1,770                                 | Bright     | sZ       | 390                       | -                             | SupplierStandard | 241               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103102303050259 | 23                  | 1,770                                 | Bright     | zS       | 390                       | -                             | SupplierStandard | 241               |
| 103102304270259 | 23                  | 1,960                                 | Galvanized | sZ       | 434                       | -                             | SupplierStandard | 241               |
| 103102303270259 | 23                  | 1,960                                 | Galvanized | zS       | 434                       | -                             | SupplierStandard | 241               |
| 103102304070259 | 23                  | 1,960                                 | Bright     | sZ       | 434                       | -                             | SupplierStandard | 241               |
| 103102303070259 | 23                  | 1,960                                 | Bright     | zS       | 434                       | -                             | SupplierStandard | 241               |
| 103102304300259 | 23                  | 2,160                                 | Galvanized | sZ       | 473                       | -                             | SupplierStandard | 241               |
| 103102303300259 | 23                  | 2,160                                 | Galvanized | zS       | 473                       | -                             | SupplierStandard | 241               |
| 103102304100259 | 23                  | 2,160                                 | Bright     | sZ       | 473                       | -                             | SupplierStandard | 241               |
| 103102303100259 | 23                  | 2,160                                 | Bright     | zS       | 473                       | -                             | SupplierStandard | 241               |
| 103102404250259 | 24                  | 1,770                                 | Galvanized | sZ       | 422                       | -                             | SupplierStandard | 261               |
| 103102403250259 | 24                  | 1,770                                 | Galvanized | zS       | 422                       | -                             | SupplierStandard | 261               |
| 103102404050259 | 24                  | 1,770                                 | Bright     | sZ       | 422                       | -                             | SupplierStandard | 261               |
| 103102403050259 | 24                  | 1,770                                 | Bright     | zS       | 422                       | -                             | SupplierStandard | 261               |
| 103102404270259 | 24                  | 1,960                                 | Galvanized | sZ       | 469                       | -                             | SupplierStandard | 261               |
| 103102403270259 | 24                  | 1,960                                 | Galvanized | zS       | 469                       | -                             | SupplierStandard | 261               |
| 103102404070259 | 24                  | 1,960                                 | Bright     | sZ       | 469                       | -                             | SupplierStandard | 261               |
| 103102403070259 | 24                  | 1,960                                 | Bright     | zS       | 469                       | -                             | SupplierStandard | 261               |
| 103102404300259 | 24                  | 2,160                                 | Galvanized | sZ       | 511                       | -                             | SupplierStandard | 261               |
| 103102403300259 | 24                  | 2,160                                 | Galvanized | zS       | 511                       | -                             | SupplierStandard | 261               |
| 103102404100259 | 24                  | 2,160                                 | Bright     | sZ       | 511                       | -                             | SupplierStandard | 261               |
| 103102403100259 | 24                  | 2,160                                 | Bright     | zS       | 511                       | -                             | SupplierStandard | 261               |
| 103102504250259 | 25                  | 1,770                                 | Galvanized | sZ       | 462                       | -                             | SupplierStandard | 285               |
| 103102503250259 | 25                  | 1,770                                 | Galvanized | zS       | 462                       | -                             | SupplierStandard | 285               |
| 103102504050259 | 25                  | 1,770                                 | Bright     | sZ       | 462                       | -                             | SupplierStandard | 285               |
| 103102503050259 | 25                  | 1,770                                 | Bright     | zS       | 462                       | -                             | SupplierStandard | 285               |
| 103102504270259 | 25                  | 1,960                                 | Galvanized | sZ       | 513                       | -                             | SupplierStandard | 285               |
| 103102503270259 | 25                  | 1,960                                 | Galvanized | zS       | 513                       | -                             | SupplierStandard | 285               |
| 103102504070259 | 25                  | 1,960                                 | Bright     | sZ       | 513                       | -                             | SupplierStandard | 285               |
| 103102503070259 | 25                  | 1,960                                 | Bright     | zS       | 513                       | -                             | SupplierStandard | 285               |
| 103102504300259 | 25                  | 2,160                                 | Galvanized | sZ       | 559                       | -                             | SupplierStandard | 285               |
| 103102503300259 | 25                  | 2,160                                 | Galvanized | zS       | 559                       | -                             | SupplierStandard | 285               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103102504100259 | 25                  | 2,160                                 | Bright     | sZ       | 559                       | -                             | SupplierStandard | 285               |
| 103102503100259 | 25                  | 2,160                                 | Bright     | zS       | 559                       | -                             | SupplierStandard | 285               |
| 103102604250259 | 26                  | 1,770                                 | Galvanized | sZ       | 497                       | -                             | SupplierStandard | 307               |
| 103102603250259 | 26                  | 1,770                                 | Galvanized | zS       | 497                       | -                             | SupplierStandard | 307               |
| 103102604050259 | 26                  | 1,770                                 | Bright     | sZ       | 497                       | -                             | SupplierStandard | 307               |
| 103102603050259 | 26                  | 1,770                                 | Bright     | zS       | 497                       | -                             | SupplierStandard | 307               |
| 103102604270259 | 26                  | 1,960                                 | Galvanized | sZ       | 552                       | -                             | SupplierStandard | 307               |
| 103102603270259 | 26                  | 1,960                                 | Galvanized | zS       | 552                       | -                             | SupplierStandard | 307               |
| 103102604070259 | 26                  | 1,960                                 | Bright     | sZ       | 552                       | -                             | SupplierStandard | 307               |
| 103102603070259 | 26                  | 1,960                                 | Bright     | zS       | 552                       | -                             | SupplierStandard | 307               |
| 103102604300259 | 26                  | 2,160                                 | Galvanized | sZ       | 601                       | -                             | SupplierStandard | 307               |
| 103102603300259 | 26                  | 2,160                                 | Galvanized | zS       | 601                       | -                             | SupplierStandard | 307               |
| 103102604100259 | 26                  | 2,160                                 | Bright     | sZ       | 601                       | -                             | SupplierStandard | 307               |
| 103102603100259 | 26                  | 2,160                                 | Bright     | zS       | 601                       | -                             | SupplierStandard | 307               |
| 103102704250259 | 27                  | 1,770                                 | Galvanized | sZ       | 528                       | -                             | SupplierStandard | 326               |
| 103102703250259 | 27                  | 1,770                                 | Galvanized | zS       | 528                       | -                             | SupplierStandard | 326               |
| 103102704050259 | 27                  | 1,770                                 | Bright     | sZ       | 528                       | -                             | SupplierStandard | 326               |
| 103102703050259 | 27                  | 1,770                                 | Bright     | zS       | 528                       | -                             | SupplierStandard | 326               |
| 103102704270259 | 27                  | 1,960                                 | Galvanized | sZ       | 587                       | -                             | SupplierStandard | 326               |
| 103102703270259 | 27                  | 1,960                                 | Galvanized | zS       | 587                       | -                             | SupplierStandard | 326               |
| 103102704070259 | 27                  | 1,960                                 | Bright     | sZ       | 587                       | -                             | SupplierStandard | 326               |
| 103102703070259 | 27                  | 1,960                                 | Bright     | zS       | 587                       | -                             | SupplierStandard | 326               |
| 103102704300259 | 27                  | 2,160                                 | Galvanized | sZ       | 640                       | -                             | SupplierStandard | 326               |
| 103102703300259 | 27                  | 2,160                                 | Galvanized | zS       | 640                       | -                             | SupplierStandard | 326               |
| 103102704100259 | 27                  | 2,160                                 | Bright     | sZ       | 640                       | -                             | SupplierStandard | 326               |
| 103102703100259 | 27                  | 2,160                                 | Bright     | zS       | 640                       | -                             | SupplierStandard | 326               |
| 103102804250259 | 28                  | 1,770                                 | Galvanized | sZ       | 580                       | -                             | SupplierStandard | 358               |
| 103102803250259 | 28                  | 1,770                                 | Galvanized | zS       | 580                       | -                             | SupplierStandard | 358               |
| 103102804050259 | 28                  | 1,770                                 | Bright     | sZ       | 580                       | -                             | SupplierStandard | 358               |
| 103102803050259 | 28                  | 1,770                                 | Bright     | zS       | 580                       | -                             | SupplierStandard | 358               |
| 103102804270259 | 28                  | 1,960                                 | Galvanized | sZ       | 645                       | -                             | SupplierStandard | 358               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103102803270259 | 28                  | 1,960                                 | Galvanized | zS       | 645                       | -                             | SupplierStandard | 358               |
| 103102804070259 | 28                  | 1,960                                 | Bright     | sZ       | 645                       | -                             | SupplierStandard | 358               |
| 103102803070259 | 28                  | 1,960                                 | Bright     | zS       | 645                       | -                             | SupplierStandard | 358               |
| 103102804300259 | 28                  | 2,160                                 | Galvanized | sZ       | 701                       | -                             | SupplierStandard | 358               |
| 103102803300259 | 28                  | 2,160                                 | Galvanized | zS       | 701                       | -                             | SupplierStandard | 358               |
| 103102804100259 | 28                  | 2,160                                 | Bright     | sZ       | 701                       | -                             | SupplierStandard | 358               |
| 103102803100259 | 28                  | 2,160                                 | Bright     | zS       | 701                       | -                             | SupplierStandard | 358               |
| 103102904250259 | 29                  | 1,770                                 | Galvanized | sZ       | 620                       | -                             | SupplierStandard | 382               |
| 103102903250259 | 29                  | 1,770                                 | Galvanized | zS       | 620                       | -                             | SupplierStandard | 382               |
| 103102904050259 | 29                  | 1,770                                 | Bright     | sZ       | 620                       | -                             | SupplierStandard | 382               |
| 103102903050259 | 29                  | 1,770                                 | Bright     | zS       | 620                       | -                             | SupplierStandard | 382               |
| 103102904270259 | 29                  | 1,960                                 | Galvanized | sZ       | 689                       | -                             | SupplierStandard | 382               |
| 103102903270259 | 29                  | 1,960                                 | Galvanized | zS       | 689                       | -                             | SupplierStandard | 382               |
| 103102904070259 | 29                  | 1,960                                 | Bright     | sZ       | 689                       | -                             | SupplierStandard | 382               |
| 103102903070259 | 29                  | 1,960                                 | Bright     | zS       | 689                       | -                             | SupplierStandard | 382               |
| 103102904300259 | 29                  | 2,160                                 | Galvanized | sZ       | 749                       | -                             | SupplierStandard | 382               |
| 103102903300259 | 29                  | 2,160                                 | Galvanized | zS       | 749                       | -                             | SupplierStandard | 382               |
| 103102904100259 | 29                  | 2,160                                 | Bright     | sZ       | 749                       | -                             | SupplierStandard | 382               |
| 103102903100259 | 29                  | 2,160                                 | Bright     | zS       | 749                       | -                             | SupplierStandard | 382               |
| 103103004250259 | 30                  | 1,770                                 | Galvanized | sZ       | 663                       | -                             | SupplierStandard | 409               |
| 103103003250259 | 30                  | 1,770                                 | Galvanized | zS       | 663                       | -                             | SupplierStandard | 409               |
| 103103004050259 | 30                  | 1,770                                 | Bright     | sZ       | 663                       | -                             | SupplierStandard | 409               |
| 103103003050259 | 30                  | 1,770                                 | Bright     | zS       | 663                       | -                             | SupplierStandard | 409               |
| 103103004270259 | 30                  | 1,960                                 | Galvanized | sZ       | 736                       | -                             | SupplierStandard | 409               |
| 103103003270259 | 30                  | 1,960                                 | Galvanized | zS       | 736                       | -                             | SupplierStandard | 409               |
| 103103004070259 | 30                  | 1,960                                 | Bright     | sZ       | 736                       | -                             | SupplierStandard | 409               |
| 103103003070259 | 30                  | 1,960                                 | Bright     | zS       | 736                       | -                             | SupplierStandard | 409               |
| 103103004300259 | 30                  | 2,160                                 | Galvanized | sZ       | 802                       | -                             | SupplierStandard | 409               |
| 103103003300259 | 30                  | 2,160                                 | Galvanized | zS       | 802                       | -                             | SupplierStandard | 409               |
| 103103004100259 | 30                  | 2,160                                 | Bright     | sZ       | 802                       | -                             | SupplierStandard | 409               |
| 103103003100259 | 30                  | 2,160                                 | Bright     | zS       | 802                       | -                             | SupplierStandard | 409               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103103104250259 | 31                  | 1,770                                 | Galvanized | sZ       | 703                       | -                             | SupplierStandard | 434               |
| 103103103250259 | 31                  | 1,770                                 | Galvanized | zS       | 703                       | -                             | SupplierStandard | 434               |
| 103103104050259 | 31                  | 1,770                                 | Bright     | sZ       | 703                       | -                             | SupplierStandard | 434               |
| 103103103050259 | 31                  | 1,770                                 | Bright     | zS       | 703                       | -                             | SupplierStandard | 434               |
| 103103104270259 | 31                  | 1,960                                 | Galvanized | sZ       | 781                       | -                             | SupplierStandard | 434               |
| 103103103270259 | 31                  | 1,960                                 | Galvanized | zS       | 781                       | -                             | SupplierStandard | 434               |
| 103103104070259 | 31                  | 1,960                                 | Bright     | sZ       | 781                       | -                             | SupplierStandard | 434               |
| 103103103070259 | 31                  | 1,960                                 | Bright     | zS       | 781                       | -                             | SupplierStandard | 434               |
| 103103104300259 | 31                  | 2,160                                 | Galvanized | sZ       | 850                       | -                             | SupplierStandard | 434               |
| 103103103300259 | 31                  | 2,160                                 | Galvanized | zS       | 850                       | -                             | SupplierStandard | 434               |
| 103103104100259 | 31                  | 2,160                                 | Bright     | sZ       | 850                       | -                             | SupplierStandard | 434               |
| 103103103100259 | 31                  | 2,160                                 | Bright     | zS       | 850                       | -                             | SupplierStandard | 434               |
| 103103204250259 | 32                  | 1,770                                 | Galvanized | sZ       | 745                       | -                             | SupplierStandard | 459               |
| 103103203250259 | 32                  | 1,770                                 | Galvanized | zS       | 745                       | -                             | SupplierStandard | 459               |
| 103103204050259 | 32                  | 1,770                                 | Bright     | sZ       | 745                       | -                             | SupplierStandard | 459               |
| 103103203050259 | 32                  | 1,770                                 | Bright     | zS       | 745                       | -                             | SupplierStandard | 459               |
| 103103204270259 | 32                  | 1,960                                 | Galvanized | sZ       | 827                       | -                             | SupplierStandard | 459               |
| 103103203270259 | 32                  | 1,960                                 | Galvanized | zS       | 827                       | -                             | SupplierStandard | 459               |
| 103103204070259 | 32                  | 1,960                                 | Bright     | sZ       | 827                       | -                             | SupplierStandard | 459               |
| 103103203070259 | 32                  | 1,960                                 | Bright     | zS       | 827                       | -                             | SupplierStandard | 459               |
| 103103204300259 | 32                  | 2,160                                 | Galvanized | sZ       | 901                       | -                             | SupplierStandard | 459               |
| 103103203300259 | 32                  | 2,160                                 | Galvanized | zS       | 901                       | -                             | SupplierStandard | 459               |
| 103103204100259 | 32                  | 2,160                                 | Bright     | sZ       | 901                       | -                             | SupplierStandard | 459               |
| 103103203100259 | 32                  | 2,160                                 | Bright     | zS       | 901                       | -                             | SupplierStandard | 459               |
| 103103304250259 | 33                  | 1,770                                 | Galvanized | sZ       | 806                       | -                             | SupplierStandard | 497               |
| 103103303250259 | 33                  | 1,770                                 | Galvanized | zS       | 806                       | -                             | SupplierStandard | 497               |
| 103103304050259 | 33                  | 1,770                                 | Bright     | sZ       | 806                       | -                             | SupplierStandard | 497               |
| 103103303050259 | 33                  | 1,770                                 | Bright     | zS       | 806                       | -                             | SupplierStandard | 497               |
| 103103304270259 | 33                  | 1,960                                 | Galvanized | sZ       | 896                       | -                             | SupplierStandard | 497               |
| 103103303270259 | 33                  | 1,960                                 | Galvanized | zS       | 896                       | -                             | SupplierStandard | 497               |
| 103103304070259 | 33                  | 1,960                                 | Bright     | sZ       | 896                       | -                             | SupplierStandard | 497               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103103303070259 | 33                  | 1,960                                 | Bright     | zS       | 896                       | -                             | SupplierStandard | 497               |
| 103103304300259 | 33                  | 2,160                                 | Galvanized | sZ       | 975                       | -                             | SupplierStandard | 497               |
| 103103303300259 | 33                  | 2,160                                 | Galvanized | zS       | 975                       | -                             | SupplierStandard | 497               |
| 103103304100259 | 33                  | 2,160                                 | Bright     | sZ       | 975                       | -                             | SupplierStandard | 497               |
| 103103303100259 | 33                  | 2,160                                 | Bright     | zS       | 975                       | -                             | SupplierStandard | 497               |
| 103103404250259 | 34                  | 1,770                                 | Galvanized | sZ       | 855                       | -                             | SupplierStandard | 528               |
| 103103403250259 | 34                  | 1,770                                 | Galvanized | zS       | 855                       | -                             | SupplierStandard | 528               |
| 103103404050259 | 34                  | 1,770                                 | Bright     | sZ       | 855                       | -                             | SupplierStandard | 528               |
| 103103403050259 | 34                  | 1,770                                 | Bright     | zS       | 855                       | -                             | SupplierStandard | 528               |
| 103103404270259 | 34                  | 1,960                                 | Galvanized | sZ       | 951                       | -                             | SupplierStandard | 528               |
| 103103403270259 | 34                  | 1,960                                 | Galvanized | zS       | 951                       | -                             | SupplierStandard | 528               |
| 103103404070259 | 34                  | 1,960                                 | Bright     | sZ       | 951                       | -                             | SupplierStandard | 528               |
| 103103403070259 | 34                  | 1,960                                 | Bright     | zS       | 951                       | -                             | SupplierStandard | 528               |
| 103103404300259 | 34                  | 2,160                                 | Galvanized | sZ       | 1,035                     | -                             | SupplierStandard | 528               |
| 103103403300259 | 34                  | 2,160                                 | Galvanized | zS       | 1,035                     | -                             | SupplierStandard | 528               |
| 103103404100259 | 34                  | 2,160                                 | Bright     | sZ       | 1,035                     | -                             | SupplierStandard | 528               |
| 103103403100259 | 34                  | 2,160                                 | Bright     | zS       | 1,035                     | -                             | SupplierStandard | 528               |
| 103103504250259 | 35                  | 1,770                                 | Galvanized | sZ       | 884                       | -                             | SupplierStandard | 549               |
| 103103503250259 | 35                  | 1,770                                 | Galvanized | zS       | 884                       | -                             | SupplierStandard | 549               |
| 103103504050259 | 35                  | 1,770                                 | Bright     | sZ       | 884                       | -                             | SupplierStandard | 549               |
| 103103503050259 | 35                  | 1,770                                 | Bright     | zS       | 884                       | -                             | SupplierStandard | 549               |
| 103103504270259 | 35                  | 1,960                                 | Galvanized | sZ       | 982                       | -                             | SupplierStandard | 549               |
| 103103503270259 | 35                  | 1,960                                 | Galvanized | zS       | 982                       | -                             | SupplierStandard | 549               |
| 103103504070259 | 35                  | 1,960                                 | Bright     | sZ       | 982                       | -                             | SupplierStandard | 549               |
| 103103503070259 | 35                  | 1,960                                 | Bright     | zS       | 982                       | -                             | SupplierStandard | 549               |
| 103103504300259 | 35                  | 2,160                                 | Galvanized | sZ       | 1,069                     | -                             | SupplierStandard | 549               |
| 103103503300259 | 35                  | 2,160                                 | Galvanized | zS       | 1,069                     | -                             | SupplierStandard | 549               |
| 103103504100259 | 35                  | 2,160                                 | Bright     | sZ       | 1,069                     | -                             | SupplierStandard | 549               |
| 103103503100259 | 35                  | 2,160                                 | Bright     | zS       | 1,069                     | -                             | SupplierStandard | 549               |
| 103103604250259 | 36                  | 1,770                                 | Galvanized | sZ       | 953                       | -                             | SupplierStandard | 588               |
| 103103603250259 | 36                  | 1,770                                 | Galvanized | zS       | 953                       | -                             | SupplierStandard | 588               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103103604050259 | 36                  | 1,770                                 | Bright     | sZ       | 953                       | -                             | SupplierStandard | 588               |
| 103103603050259 | 36                  | 1,770                                 | Bright     | zS       | 953                       | -                             | SupplierStandard | 588               |
| 103103604270259 | 36                  | 1,960                                 | Galvanized | sZ       | 1,058                     | -                             | SupplierStandard | 588               |
| 103103603270259 | 36                  | 1,960                                 | Galvanized | zS       | 1,058                     | -                             | SupplierStandard | 588               |
| 103103604070259 | 36                  | 1,960                                 | Bright     | sZ       | 1,058                     | -                             | SupplierStandard | 588               |
| 103103603070259 | 36                  | 1,960                                 | Bright     | zS       | 1,058                     | -                             | SupplierStandard | 588               |
| 103103604300259 | 36                  | 2,160                                 | Galvanized | sZ       | 1,152                     | -                             | SupplierStandard | 588               |
| 103103603300259 | 36                  | 2,160                                 | Galvanized | zS       | 1,152                     | -                             | SupplierStandard | 588               |
| 103103604100259 | 36                  | 2,160                                 | Bright     | sZ       | 1,152                     | -                             | SupplierStandard | 588               |
| 103103603100259 | 36                  | 2,160                                 | Bright     | zS       | 1,152                     | -                             | SupplierStandard | 588               |
| 103103704250259 | 37                  | 1,770                                 | Galvanized | sZ       | 1,002                     | -                             | SupplierStandard | 618               |
| 103103703250259 | 37                  | 1,770                                 | Galvanized | zS       | 1,002                     | -                             | SupplierStandard | 618               |
| 103103704050259 | 37                  | 1,770                                 | Bright     | sZ       | 1,002                     | -                             | SupplierStandard | 618               |
| 103103703050259 | 37                  | 1,770                                 | Bright     | zS       | 1,002                     | -                             | SupplierStandard | 618               |
| 103103704270259 | 37                  | 1,960                                 | Galvanized | sZ       | 1,113                     | -                             | SupplierStandard | 618               |
| 103103703270259 | 37                  | 1,960                                 | Galvanized | zS       | 1,113                     | -                             | SupplierStandard | 618               |
| 103103704070259 | 37                  | 1,960                                 | Bright     | sZ       | 1,113                     | -                             | SupplierStandard | 618               |
| 103103703070259 | 37                  | 1,960                                 | Bright     | zS       | 1,113                     | -                             | SupplierStandard | 618               |
| 103103704300259 | 37                  | 2,160                                 | Galvanized | sZ       | 1,212                     | -                             | SupplierStandard | 618               |
| 103103703300259 | 37                  | 2,160                                 | Galvanized | zS       | 1,212                     | -                             | SupplierStandard | 618               |
| 103103704100259 | 37                  | 2,160                                 | Bright     | sZ       | 1,212                     | -                             | SupplierStandard | 618               |
| 103103703100259 | 37                  | 2,160                                 | Bright     | zS       | 1,212                     | -                             | SupplierStandard | 618               |
| 103103804250259 | 38                  | 1,770                                 | Galvanized | sZ       | 1,069                     | -                             | SupplierStandard | 653               |
| 103103803250259 | 38                  | 1,770                                 | Galvanized | zS       | 1,069                     | -                             | SupplierStandard | 653               |
| 103103804050259 | 38                  | 1,770                                 | Bright     | sZ       | 1,069                     | -                             | SupplierStandard | 653               |
| 103103803050259 | 38                  | 1,770                                 | Bright     | zS       | 1,069                     | -                             | SupplierStandard | 653               |
| 103103804270259 | 38                  | 1,960                                 | Galvanized | sZ       | 1,188                     | -                             | SupplierStandard | 653               |
| 103103803270259 | 38                  | 1,960                                 | Galvanized | zS       | 1,188                     | -                             | SupplierStandard | 653               |
| 103103804070259 | 38                  | 1,960                                 | Bright     | sZ       | 1,188                     | -                             | SupplierStandard | 653               |
| 103103803070259 | 38                  | 1,960                                 | Bright     | zS       | 1,188                     | -                             | SupplierStandard | 653               |
| 103103804300259 | 38                  | 2,160                                 | Galvanized | sZ       | 1,293                     | -                             | SupplierStandard | 653               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103103803300259 | 38                  | 2,160                                 | Galvanized | zS       | 1,293                     | -                             | SupplierStandard | 653               |
| 103103804100259 | 38                  | 2,160                                 | Bright     | sZ       | 1,293                     | -                             | SupplierStandard | 653               |
| 103103803100259 | 38                  | 2,160                                 | Bright     | zS       | 1,293                     | -                             | SupplierStandard | 653               |
| 103103904250259 | 39                  | 1,770                                 | Galvanized | sZ       | 1,120                     | -                             | SupplierStandard | 691               |
| 103103903250259 | 39                  | 1,770                                 | Galvanized | zS       | 1,120                     | -                             | SupplierStandard | 691               |
| 103103904050259 | 39                  | 1,770                                 | Bright     | sZ       | 1,120                     | -                             | SupplierStandard | 691               |
| 103103903050259 | 39                  | 1,770                                 | Bright     | zS       | 1,120                     | -                             | SupplierStandard | 691               |
| 103103904270259 | 39                  | 1,960                                 | Galvanized | sZ       | 1,244                     | -                             | SupplierStandard | 691               |
| 103103903270259 | 39                  | 1,960                                 | Galvanized | zS       | 1,244                     | -                             | SupplierStandard | 691               |
| 103103904070259 | 39                  | 1,960                                 | Bright     | sZ       | 1,244                     | -                             | SupplierStandard | 691               |
| 103103903070259 | 39                  | 1,960                                 | Bright     | zS       | 1,244                     | -                             | SupplierStandard | 691               |
| 103103904300259 | 39                  | 2,160                                 | Galvanized | sZ       | 1,354                     | -                             | SupplierStandard | 691               |
| 103103903300259 | 39                  | 2,160                                 | Galvanized | zS       | 1,354                     | -                             | SupplierStandard | 691               |
| 103103904100259 | 39                  | 2,160                                 | Bright     | sZ       | 1,354                     | -                             | SupplierStandard | 691               |
| 103103903100259 | 39                  | 2,160                                 | Bright     | zS       | 1,354                     | -                             | SupplierStandard | 691               |
| 103104004250259 | 40                  | 1,770                                 | Galvanized | sZ       | 1,180                     | -                             | SupplierStandard | 728               |
| 103104003250259 | 40                  | 1,770                                 | Galvanized | zS       | 1,180                     | -                             | SupplierStandard | 728               |
| 103104004050259 | 40                  | 1,770                                 | Bright     | sZ       | 1,180                     | -                             | SupplierStandard | 728               |
| 103104003050259 | 40                  | 1,770                                 | Bright     | zS       | 1,180                     | -                             | SupplierStandard | 728               |
| 103104004270259 | 40                  | 1,960                                 | Galvanized | sZ       | 1,311                     | -                             | SupplierStandard | 728               |
| 103104003270259 | 40                  | 1,960                                 | Galvanized | zS       | 1,311                     | -                             | SupplierStandard | 728               |
| 103104004070259 | 40                  | 1,960                                 | Bright     | sZ       | 1,311                     | -                             | SupplierStandard | 728               |
| 103104003070259 | 40                  | 1,960                                 | Bright     | zS       | 1,311                     | -                             | SupplierStandard | 728               |
| 103104004300259 | 40                  | 2,160                                 | Galvanized | sZ       | 1,427                     | -                             | SupplierStandard | 728               |
| 103104003300259 | 40                  | 2,160                                 | Galvanized | zS       | 1,427                     | -                             | SupplierStandard | 728               |
| 103104004100259 | 40                  | 2,160                                 | Bright     | sZ       | 1,427                     | -                             | SupplierStandard | 728               |
| 103104003100259 | 40                  | 2,160                                 | Bright     | zS       | 1,427                     | -                             | SupplierStandard | 728               |
| 103104104250259 | 41                  | 1,770                                 | Galvanized | sZ       | 1,232                     | -                             | SupplierStandard | 760               |
| 103104103250259 | 41                  | 1,770                                 | Galvanized | zS       | 1,232                     | -                             | SupplierStandard | 760               |
| 103104104050259 | 41                  | 1,770                                 | Bright     | sZ       | 1,232                     | -                             | SupplierStandard | 760               |
| 103104103050259 | 41                  | 1,770                                 | Bright     | zS       | 1,232                     | -                             | SupplierStandard | 760               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103104104270259 | 41                  | 1,960                                 | Galvanized | sZ       | 1,369                     | -                             | SupplierStandard | 760               |
| 103104103270259 | 41                  | 1,960                                 | Galvanized | zS       | 1,369                     | -                             | SupplierStandard | 760               |
| 103104104070259 | 41                  | 1,960                                 | Bright     | sZ       | 1,369                     | -                             | SupplierStandard | 760               |
| 103104103070259 | 41                  | 1,960                                 | Bright     | zS       | 1,369                     | -                             | SupplierStandard | 760               |
| 103104104300259 | 41                  | 2,160                                 | Galvanized | sZ       | 1,490                     | -                             | SupplierStandard | 760               |
| 103104103300259 | 41                  | 2,160                                 | Galvanized | zS       | 1,490                     | -                             | SupplierStandard | 760               |
| 103104104100259 | 41                  | 2,160                                 | Bright     | sZ       | 1,490                     | -                             | SupplierStandard | 760               |
| 103104103100259 | 41                  | 2,160                                 | Bright     | zS       | 1,490                     | -                             | SupplierStandard | 760               |
| 103104204250259 | 42                  | 1,770                                 | Galvanized | sZ       | 1,307                     | -                             | SupplierStandard | 806               |
| 103104203250259 | 42                  | 1,770                                 | Galvanized | zS       | 1,307                     | -                             | SupplierStandard | 806               |
| 103104204050259 | 42                  | 1,770                                 | Bright     | sZ       | 1,307                     | -                             | SupplierStandard | 806               |
| 103104203050259 | 42                  | 1,770                                 | Bright     | zS       | 1,307                     | -                             | SupplierStandard | 806               |
| 103104204270259 | 42                  | 1,960                                 | Galvanized | sZ       | 1,452                     | -                             | SupplierStandard | 806               |
| 103104203270259 | 42                  | 1,960                                 | Galvanized | zS       | 1,452                     | -                             | SupplierStandard | 806               |
| 103104204070259 | 42                  | 1,960                                 | Bright     | sZ       | 1,452                     | -                             | SupplierStandard | 806               |
| 103104203070259 | 42                  | 1,960                                 | Bright     | zS       | 1,452                     | -                             | SupplierStandard | 806               |
| 103104204300259 | 42                  | 2,160                                 | Galvanized | sZ       | 1,581                     | -                             | SupplierStandard | 806               |
| 103104203300259 | 42                  | 2,160                                 | Galvanized | zS       | 1,581                     | -                             | SupplierStandard | 806               |
| 103104204100259 | 42                  | 2,160                                 | Bright     | sZ       | 1,581                     | -                             | SupplierStandard | 806               |
| 103104203100259 | 42                  | 2,160                                 | Bright     | zS       | 1,581                     | -                             | SupplierStandard | 806               |
| 103104304250259 | 43                  | 1,770                                 | Galvanized | sZ       | 1,368                     | -                             | SupplierStandard | 844               |
| 103104303250259 | 43                  | 1,770                                 | Galvanized | zS       | 1,368                     | -                             | SupplierStandard | 844               |
| 103104304050259 | 43                  | 1,770                                 | Bright     | sZ       | 1,368                     | -                             | SupplierStandard | 844               |
| 103104303050259 | 43                  | 1,770                                 | Bright     | zS       | 1,368                     | -                             | SupplierStandard | 844               |
| 103104304270259 | 43                  | 1,960                                 | Galvanized | sZ       | 1,520                     | -                             | SupplierStandard | 844               |
| 103104303270259 | 43                  | 1,960                                 | Galvanized | zS       | 1,520                     | -                             | SupplierStandard | 844               |
| 103104304070259 | 43                  | 1,960                                 | Bright     | sZ       | 1,520                     | -                             | SupplierStandard | 844               |
| 103104303070259 | 43                  | 1,960                                 | Bright     | zS       | 1,520                     | -                             | SupplierStandard | 844               |
| 103104304300259 | 43                  | 2,160                                 | Galvanized | sZ       | 1,654                     | -                             | SupplierStandard | 844               |
| 103104303300259 | 43                  | 2,160                                 | Galvanized | zS       | 1,654                     | -                             | SupplierStandard | 844               |
| 103104304100259 | 43                  | 2,160                                 | Bright     | sZ       | 1,654                     | -                             | SupplierStandard | 844               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103104303100259 | 43                  | 2,160                                 | Bright     | zS       | 1,654                     | -                             | SupplierStandard | 844               |
| 103104404250259 | 44                  | 1,770                                 | Galvanized | sZ       | 1,434                     | -                             | SupplierStandard | 885               |
| 103104403250259 | 44                  | 1,770                                 | Galvanized | zS       | 1,434                     | -                             | SupplierStandard | 885               |
| 103104404050259 | 44                  | 1,770                                 | Bright     | sZ       | 1,434                     | -                             | SupplierStandard | 885               |
| 103104403050259 | 44                  | 1,770                                 | Bright     | zS       | 1,434                     | -                             | SupplierStandard | 885               |
| 103104404270259 | 44                  | 1,960                                 | Galvanized | sZ       | 1,594                     | -                             | SupplierStandard | 885               |
| 103104403270259 | 44                  | 1,960                                 | Galvanized | zS       | 1,594                     | -                             | SupplierStandard | 885               |
| 103104404070259 | 44                  | 1,960                                 | Bright     | sZ       | 1,594                     | -                             | SupplierStandard | 885               |
| 103104403070259 | 44                  | 1,960                                 | Bright     | zS       | 1,594                     | -                             | SupplierStandard | 885               |
| 103104404300259 | 44                  | 2,160                                 | Galvanized | sZ       | 1,734                     | -                             | SupplierStandard | 885               |
| 103104403300259 | 44                  | 2,160                                 | Galvanized | zS       | 1,734                     | -                             | SupplierStandard | 885               |
| 103104404100259 | 44                  | 2,160                                 | Bright     | sZ       | 1,734                     | -                             | SupplierStandard | 885               |
| 103104403100259 | 44                  | 2,160                                 | Bright     | zS       | 1,734                     | -                             | SupplierStandard | 885               |
| 103104504250259 | 45                  | 1,770                                 | Galvanized | sZ       | 1,481                     | -                             | SupplierStandard | 911               |
| 103104503250259 | 45                  | 1,770                                 | Galvanized | zS       | 1,481                     | -                             | SupplierStandard | 911               |
| 103104504050259 | 45                  | 1,770                                 | Bright     | sZ       | 1,481                     | -                             | SupplierStandard | 911               |
| 103104503050259 | 45                  | 1,770                                 | Bright     | zS       | 1,481                     | -                             | SupplierStandard | 911               |
| 103104504270259 | 45                  | 1,960                                 | Galvanized | sZ       | 1,640                     | -                             | SupplierStandard | 911               |
| 103104503270259 | 45                  | 1,960                                 | Galvanized | zS       | 1,640                     | -                             | SupplierStandard | 911               |
| 103104504070259 | 45                  | 1,960                                 | Bright     | sZ       | 1,640                     | -                             | SupplierStandard | 911               |
| 103104503070259 | 45                  | 1,960                                 | Bright     | zS       | 1,640                     | -                             | SupplierStandard | 911               |
| 103104504300259 | 45                  | 2,160                                 | Galvanized | sZ       | 1,786                     | -                             | SupplierStandard | 911               |
| 103104503300259 | 45                  | 2,160                                 | Galvanized | zS       | 1,786                     | -                             | SupplierStandard | 911               |
| 103104504100259 | 45                  | 2,160                                 | Bright     | sZ       | 1,786                     | -                             | SupplierStandard | 911               |
| 103104503100259 | 45                  | 2,160                                 | Bright     | zS       | 1,786                     | -                             | SupplierStandard | 911               |
| 103104604250259 | 46                  | 1,770                                 | Galvanized | sZ       | 1,550                     | -                             | SupplierStandard | 956               |
| 103104603250259 | 46                  | 1,770                                 | Galvanized | zS       | 1,550                     | -                             | SupplierStandard | 956               |
| 103104604050259 | 46                  | 1,770                                 | Bright     | sZ       | 1,550                     | -                             | SupplierStandard | 956               |
| 103104603050259 | 46                  | 1,770                                 | Bright     | zS       | 1,550                     | -                             | SupplierStandard | 956               |
| 103104604270259 | 46                  | 1,960                                 | Galvanized | sZ       | 1,723                     | -                             | SupplierStandard | 956               |
| 103104603270259 | 46                  | 1,960                                 | Galvanized | zS       | 1,723                     | -                             | SupplierStandard | 956               |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103104604070259 | 46                  | 1,960                                 | Bright     | sZ       | 1,723                     | -                             | SupplierStandard | 956               |
| 103104603070259 | 46                  | 1,960                                 | Bright     | zS       | 1,723                     | -                             | SupplierStandard | 956               |
| 103104604300259 | 46                  | 2,160                                 | Galvanized | sZ       | 1,875                     | -                             | SupplierStandard | 956               |
| 103104603300259 | 46                  | 2,160                                 | Galvanized | zS       | 1,875                     | -                             | SupplierStandard | 956               |
| 103104604100259 | 46                  | 2,160                                 | Bright     | sZ       | 1,875                     | -                             | SupplierStandard | 956               |
| 103104603100259 | 46                  | 2,160                                 | Bright     | zS       | 1,875                     | -                             | SupplierStandard | 956               |
| 103104704250259 | 47                  | 1,770                                 | Galvanized | sZ       | 1,616                     | -                             | SupplierStandard | 994               |
| 103104703250259 | 47                  | 1,770                                 | Galvanized | zS       | 1,616                     | -                             | SupplierStandard | 994               |
| 103104704050259 | 47                  | 1,770                                 | Bright     | sZ       | 1,616                     | -                             | SupplierStandard | 994               |
| 103104703050259 | 47                  | 1,770                                 | Bright     | zS       | 1,616                     | -                             | SupplierStandard | 994               |
| 103104704270259 | 47                  | 1,960                                 | Galvanized | sZ       | 1,789                     | -                             | SupplierStandard | 994               |
| 103104703270259 | 47                  | 1,960                                 | Galvanized | zS       | 1,789                     | -                             | SupplierStandard | 994               |
| 103104704070259 | 47                  | 1,960                                 | Bright     | sZ       | 1,789                     | -                             | SupplierStandard | 994               |
| 103104703070259 | 47                  | 1,960                                 | Bright     | zS       | 1,789                     | -                             | SupplierStandard | 994               |
| 103104704300259 | 47                  | 2,160                                 | Galvanized | sZ       | 1,948                     | -                             | SupplierStandard | 994               |
| 103104703300259 | 47                  | 2,160                                 | Galvanized | zS       | 1,948                     | -                             | SupplierStandard | 994               |
| 103104704100259 | 47                  | 2,160                                 | Bright     | sZ       | 1,948                     | -                             | SupplierStandard | 994               |
| 103104703100259 | 47                  | 2,160                                 | Bright     | zS       | 1,948                     | -                             | SupplierStandard | 994               |
| 103104804250259 | 48                  | 1,770                                 | Galvanized | sZ       | 1,678                     | -                             | SupplierStandard | 1,035             |
| 103104803250259 | 48                  | 1,770                                 | Galvanized | zS       | 1,678                     | -                             | SupplierStandard | 1,035             |
| 103104804050259 | 48                  | 1,770                                 | Bright     | sZ       | 1,678                     | -                             | SupplierStandard | 1,035             |
| 103104803050259 | 48                  | 1,770                                 | Bright     | zS       | 1,678                     | -                             | SupplierStandard | 1,035             |
| 103104804270259 | 48                  | 1,960                                 | Galvanized | sZ       | 1,864                     | -                             | SupplierStandard | 1,035             |
| 103104803270259 | 48                  | 1,960                                 | Galvanized | zS       | 1,864                     | -                             | SupplierStandard | 1,035             |
| 103104804070259 | 48                  | 1,960                                 | Bright     | sZ       | 1,864                     | -                             | SupplierStandard | 1,035             |
| 103104803070259 | 48                  | 1,960                                 | Bright     | zS       | 1,864                     | -                             | SupplierStandard | 1,035             |
| 103104804300259 | 48                  | 2,160                                 | Galvanized | sZ       | 2,029                     | -                             | SupplierStandard | 1,035             |
| 103104803300259 | 48                  | 2,160                                 | Galvanized | zS       | 2,029                     | -                             | SupplierStandard | 1,035             |
| 103104804100259 | 48                  | 2,160                                 | Bright     | sZ       | 2,029                     | -                             | SupplierStandard | 1,035             |
| 103104803100259 | 48                  | 2,160                                 | Bright     | zS       | 2,029                     | -                             | SupplierStandard | 1,035             |
| 103104904250259 | 49                  | 1,770                                 | Galvanized | sZ       | 1,756                     | -                             | SupplierStandard | 1,080             |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103104903250259 | 49                  | 1,770                                 | Galvanized | zS       | 1,756                     | -                             | SupplierStandard | 1,080             |
| 103104904050259 | 49                  | 1,770                                 | Bright     | sZ       | 1,756                     | -                             | SupplierStandard | 1,080             |
| 103104903050259 | 49                  | 1,770                                 | Bright     | zS       | 1,756                     | -                             | SupplierStandard | 1,080             |
| 103104904270259 | 49                  | 1,960                                 | Galvanized | sZ       | 1,944                     | -                             | SupplierStandard | 1,080             |
| 103104903270259 | 49                  | 1,960                                 | Galvanized | zS       | 1,944                     | -                             | SupplierStandard | 1,080             |
| 103104904070259 | 49                  | 1,960                                 | Bright     | sZ       | 1,944                     | -                             | SupplierStandard | 1,080             |
| 103104903070259 | 49                  | 1,960                                 | Bright     | zS       | 1,944                     | -                             | SupplierStandard | 1,080             |
| 103104904300259 | 49                  | 2,160                                 | Galvanized | sZ       | 2,118                     | -                             | SupplierStandard | 1,080             |
| 103104903300259 | 49                  | 2,160                                 | Galvanized | zS       | 2,118                     | -                             | SupplierStandard | 1,080             |
| 103104904100259 | 49                  | 2,160                                 | Bright     | sZ       | 2,118                     | -                             | SupplierStandard | 1,080             |
| 103104903100259 | 49                  | 2,160                                 | Bright     | zS       | 2,118                     | -                             | SupplierStandard | 1,080             |
| 103105004250259 | 50                  | 1,770                                 | Galvanized | sZ       | 1,824                     | -                             | SupplierStandard | 1,125             |
| 103105003250259 | 50                  | 1,770                                 | Galvanized | zS       | 1,824                     | -                             | SupplierStandard | 1,125             |
| 103105004050259 | 50                  | 1,770                                 | Bright     | sZ       | 1,824                     | -                             | SupplierStandard | 1,125             |
| 103105003050259 | 50                  | 1,770                                 | Bright     | zS       | 1,824                     | -                             | SupplierStandard | 1,125             |
| 103105004270259 | 50                  | 1,960                                 | Galvanized | sZ       | 2,027                     | -                             | SupplierStandard | 1,125             |
| 103105003270259 | 50                  | 1,960                                 | Galvanized | zS       | 2,027                     | -                             | SupplierStandard | 1,125             |
| 103105004070259 | 50                  | 1,960                                 | Bright     | sZ       | 2,027                     | -                             | SupplierStandard | 1,125             |
| 103105003070259 | 50                  | 1,960                                 | Bright     | zS       | 2,027                     | -                             | SupplierStandard | 1,125             |
| 103105004300259 | 50                  | 2,160                                 | Galvanized | sZ       | 2,206                     | -                             | SupplierStandard | 1,125             |
| 103105003300259 | 50                  | 2,160                                 | Galvanized | zS       | 2,206                     | -                             | SupplierStandard | 1,125             |
| 103105004100259 | 50                  | 2,160                                 | Bright     | sZ       | 2,206                     | -                             | SupplierStandard | 1,125             |
| 103105003100259 | 50                  | 2,160                                 | Bright     | zS       | 2,206                     | -                             | SupplierStandard | 1,125             |
| 103105104250259 | 51                  | 1,770                                 | Galvanized | sZ       | 1,902                     | -                             | SupplierStandard | 1,170             |
| 103105103250259 | 51                  | 1,770                                 | Galvanized | zS       | 1,902                     | -                             | SupplierStandard | 1,170             |
| 103105104050259 | 51                  | 1,770                                 | Bright     | sZ       | 1,902                     | -                             | SupplierStandard | 1,170             |
| 103105103050259 | 51                  | 1,770                                 | Bright     | zS       | 1,902                     | -                             | SupplierStandard | 1,170             |
| 103105104270259 | 51                  | 1,960                                 | Galvanized | sZ       | 2,107                     | -                             | SupplierStandard | 1,170             |
| 103105103270259 | 51                  | 1,960                                 | Galvanized | zS       | 2,107                     | -                             | SupplierStandard | 1,170             |
| 103105104070259 | 51                  | 1,960                                 | Bright     | sZ       | 2,107                     | -                             | SupplierStandard | 1,170             |
| 103105103070259 | 51                  | 1,960                                 | Bright     | zS       | 2,107                     | -                             | SupplierStandard | 1,170             |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|-----------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 103105104300259 | 51               | 2,160                              | Galvanized | sZ       | 2,294                  | -                          | SupplierStandard | 1,170          |
| 103105103300259 | 51               | 2,160                              | Galvanized | zS       | 2,294                  | -                          | SupplierStandard | 1,170          |
| 103105104100259 | 51               | 2,160                              | Bright     | sZ       | 2,294                  | -                          | SupplierStandard | 1,170          |
| 103105103100259 | 51               | 2,160                              | Bright     | zS       | 2,294                  | -                          | SupplierStandard | 1,170          |
| 103105204250259 | 52               | 1,770                              | Galvanized | sZ       | 1,951                  | -                          | SupplierStandard | 1,203          |
| 103105203250259 | 52               | 1,770                              | Galvanized | zS       | 1,951                  | -                          | SupplierStandard | 1,203          |
| 103105204050259 | 52               | 1,770                              | Bright     | sZ       | 1,951                  | -                          | SupplierStandard | 1,203          |
| 103105203050259 | 52               | 1,770                              | Bright     | zS       | 1,951                  | -                          | SupplierStandard | 1,203          |
| 103105204270259 | 52               | 1,960                              | Galvanized | sZ       | 2,168                  | -                          | SupplierStandard | 1,203          |
| 103105203270259 | 52               | 1,960                              | Galvanized | zS       | 2,168                  | -                          | SupplierStandard | 1,203          |
| 103105204070259 | 52               | 1,960                              | Bright     | sZ       | 2,168                  | -                          | SupplierStandard | 1,203          |
| 103105203070259 | 52               | 1,960                              | Bright     | zS       | 2,168                  | -                          | SupplierStandard | 1,203          |
| 103105204300259 | 52               | 2,160                              | Galvanized | sZ       | 2,359                  | -                          | SupplierStandard | 1,203          |
| 103105203300259 | 52               | 2,160                              | Galvanized | zS       | 2,359                  | -                          | SupplierStandard | 1,203          |
| 103105204100259 | 52               | 2,160                              | Bright     | sZ       | 2,359                  | -                          | SupplierStandard | 1,203          |
| 103105203100259 | 52               | 2,160                              | Bright     | zS       | 2,359                  | -                          | SupplierStandard | 1,203          |
| 103105304250259 | 53               | 1,770                              | Galvanized | sZ       | 2,054                  | -                          | SupplierStandard | 1,264          |
| 103105303250259 | 53               | 1,770                              | Galvanized | zS       | 2,054                  | -                          | SupplierStandard | 1,264          |
| 103105304050259 | 53               | 1,770                              | Bright     | sZ       | 2,054                  | -                          | SupplierStandard | 1,264          |
| 103105303050259 | 53               | 1,770                              | Bright     | zS       | 2,054                  | -                          | SupplierStandard | 1,264          |
| 103105304270259 | 53               | 1,960                              | Galvanized | sZ       | 2,275                  | -                          | SupplierStandard | 1,264          |
| 103105303270259 | 53               | 1,960                              | Galvanized | zS       | 2,275                  | -                          | SupplierStandard | 1,264          |
| 103105304070259 | 53               | 1,960                              | Bright     | sZ       | 2,275                  | -                          | SupplierStandard | 1,264          |
| 103105303070259 | 53               | 1,960                              | Bright     | zS       | 2,275                  | -                          | SupplierStandard | 1,264          |
| 103105304300259 | 53               | 2,160                              | Galvanized | sZ       | 2,477                  | -                          | SupplierStandard | 1,264          |
| 103105303300259 | 53               | 2,160                              | Galvanized | zS       | 2,477                  | -                          | SupplierStandard | 1,264          |
| 103105304100259 | 53               | 2,160                              | Bright     | sZ       | 2,477                  | -                          | SupplierStandard | 1,264          |
| 103105303100259 | 53               | 2,160                              | Bright     | zS       | 2,477                  | -                          | SupplierStandard | 1,264          |
| 103105404250259 | 54               | 1,770                              | Galvanized | sZ       | 2,133                  | -                          | SupplierStandard | 1,315          |
| 103105403250259 | 54               | 1,770                              | Galvanized | zS       | 2,133                  | -                          | SupplierStandard | 1,315          |
| 103105404050259 | 54               | 1,770                              | Bright     | sZ       | 2,133                  | -                          | SupplierStandard | 1,315          |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103105403050259 | 54                  | 1,770                                 | Bright     | zS       | 2,133                     | -                             | SupplierStandard | 1,315             |
| 103105404270259 | 54                  | 1,960                                 | Galvanized | sZ       | 2,369                     | -                             | SupplierStandard | 1,315             |
| 103105403270259 | 54                  | 1,960                                 | Galvanized | zS       | 2,369                     | -                             | SupplierStandard | 1,315             |
| 103105404070259 | 54                  | 1,960                                 | Bright     | sZ       | 2,369                     | -                             | SupplierStandard | 1,315             |
| 103105403070259 | 54                  | 1,960                                 | Bright     | zS       | 2,369                     | -                             | SupplierStandard | 1,315             |
| 103105404300259 | 54                  | 2,160                                 | Galvanized | sZ       | 2,578                     | -                             | SupplierStandard | 1,315             |
| 103105403300259 | 54                  | 2,160                                 | Galvanized | zS       | 2,578                     | -                             | SupplierStandard | 1,315             |
| 103105404100259 | 54                  | 2,160                                 | Bright     | sZ       | 2,578                     | -                             | SupplierStandard | 1,315             |
| 103105403100259 | 54                  | 2,160                                 | Bright     | zS       | 2,578                     | -                             | SupplierStandard | 1,315             |
| 103105504250259 | 55                  | 1,770                                 | Galvanized | sZ       | 2,212                     | -                             | SupplierStandard | 1,361             |
| 103105503250259 | 55                  | 1,770                                 | Galvanized | zS       | 2,212                     | -                             | SupplierStandard | 1,361             |
| 103105504050259 | 55                  | 1,770                                 | Bright     | sZ       | 2,212                     | -                             | SupplierStandard | 1,361             |
| 103105503050259 | 55                  | 1,770                                 | Bright     | zS       | 2,212                     | -                             | SupplierStandard | 1,361             |
| 103105504270259 | 55                  | 1,960                                 | Galvanized | sZ       | 2,450                     | -                             | SupplierStandard | 1,361             |
| 103105503270259 | 55                  | 1,960                                 | Galvanized | zS       | 2,450                     | -                             | SupplierStandard | 1,361             |
| 103105504070259 | 55                  | 1,960                                 | Bright     | sZ       | 2,450                     | -                             | SupplierStandard | 1,361             |
| 103105503070259 | 55                  | 1,960                                 | Bright     | zS       | 2,450                     | -                             | SupplierStandard | 1,361             |
| 103105504300259 | 55                  | 2,160                                 | Galvanized | sZ       | 2,668                     | -                             | SupplierStandard | 1,361             |
| 103105503300259 | 55                  | 2,160                                 | Galvanized | zS       | 2,668                     | -                             | SupplierStandard | 1,361             |
| 103105504100259 | 55                  | 2,160                                 | Bright     | sZ       | 2,668                     | -                             | SupplierStandard | 1,361             |
| 103105503100259 | 55                  | 2,160                                 | Bright     | zS       | 2,668                     | -                             | SupplierStandard | 1,361             |
| 103105604250259 | 56                  | 1,770                                 | Galvanized | sZ       | 2,323                     | -                             | SupplierStandard | 1,432             |
| 103105603250259 | 56                  | 1,770                                 | Galvanized | zS       | 2,323                     | -                             | SupplierStandard | 1,432             |
| 103105604050259 | 56                  | 1,770                                 | Bright     | sZ       | 2,323                     | -                             | SupplierStandard | 1,432             |
| 103105603050259 | 56                  | 1,770                                 | Bright     | zS       | 2,323                     | -                             | SupplierStandard | 1,432             |
| 103105604270259 | 56                  | 1,960                                 | Galvanized | sZ       | 2,581                     | -                             | SupplierStandard | 1,432             |
| 103105603270259 | 56                  | 1,960                                 | Galvanized | zS       | 2,581                     | -                             | SupplierStandard | 1,432             |
| 103105604070259 | 56                  | 1,960                                 | Bright     | sZ       | 2,581                     | -                             | SupplierStandard | 1,432             |
| 103105603070259 | 56                  | 1,960                                 | Bright     | zS       | 2,581                     | -                             | SupplierStandard | 1,432             |
| 103105604300259 | 56                  | 2,160                                 | Galvanized | sZ       | 2,808                     | -                             | SupplierStandard | 1,432             |
| 103105603300259 | 56                  | 2,160                                 | Galvanized | zS       | 2,808                     | -                             | SupplierStandard | 1,432             |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|-----------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 103105604100259 | 56               | 2,160                              | Bright     | sZ       | 2,808                  | -                          | SupplierStandard | 1,432          |
| 103105603100259 | 56               | 2,160                              | Bright     | zS       | 2,808                  | -                          | SupplierStandard | 1,432          |
| 103105704250259 | 57               | 1,770                              | Galvanized | sZ       | 2,376                  | -                          | SupplierStandard | 1,462          |
| 103105703250259 | 57               | 1,770                              | Galvanized | zS       | 2,376                  | -                          | SupplierStandard | 1,462          |
| 103105704050259 | 57               | 1,770                              | Bright     | sZ       | 2,376                  | -                          | SupplierStandard | 1,462          |
| 103105703050259 | 57               | 1,770                              | Bright     | zS       | 2,376                  | -                          | SupplierStandard | 1,462          |
| 103105704270259 | 57               | 1,960                              | Galvanized | sZ       | 2,631                  | -                          | SupplierStandard | 1,462          |
| 103105703270259 | 57               | 1,960                              | Galvanized | zS       | 2,631                  | -                          | SupplierStandard | 1,462          |
| 103105704070259 | 57               | 1,960                              | Bright     | sZ       | 2,631                  | -                          | SupplierStandard | 1,462          |
| 103105703070259 | 57               | 1,960                              | Bright     | zS       | 2,631                  | -                          | SupplierStandard | 1,462          |
| 103105704300259 | 57               | 2,160                              | Galvanized | sZ       | 2,866                  | -                          | SupplierStandard | 1,462          |
| 103105703300259 | 57               | 2,160                              | Galvanized | zS       | 2,866                  | -                          | SupplierStandard | 1,462          |
| 103105704100259 | 57               | 2,160                              | Bright     | sZ       | 2,866                  | -                          | SupplierStandard | 1,462          |
| 103105703100259 | 57               | 2,160                              | Bright     | zS       | 2,866                  | -                          | SupplierStandard | 1,462          |
| 103105804250259 | 58               | 1,770                              | Galvanized | sZ       | 2,482                  | -                          | SupplierStandard | 1,531          |
| 103105803250259 | 58               | 1,770                              | Galvanized | zS       | 2,482                  | -                          | SupplierStandard | 1,531          |
| 103105804050259 | 58               | 1,770                              | Bright     | sZ       | 2,482                  | -                          | SupplierStandard | 1,531          |
| 103105803050259 | 58               | 1,770                              | Bright     | zS       | 2,482                  | -                          | SupplierStandard | 1,531          |
| 103105804270259 | 58               | 1,960                              | Galvanized | sZ       | 2,758                  | -                          | SupplierStandard | 1,531          |
| 103105803270259 | 58               | 1,960                              | Galvanized | zS       | 2,758                  | -                          | SupplierStandard | 1,531          |
| 103105804070259 | 58               | 1,960                              | Bright     | sZ       | 2,758                  | -                          | SupplierStandard | 1,531          |
| 103105803070259 | 58               | 1,960                              | Bright     | zS       | 2,758                  | -                          | SupplierStandard | 1,531          |
| 103105804300259 | 58               | 2,160                              | Galvanized | sZ       | 3,001                  | -                          | SupplierStandard | 1,531          |
| 103105803300259 | 58               | 2,160                              | Galvanized | zS       | 3,001                  | -                          | SupplierStandard | 1,531          |
| 103105804100259 | 58               | 2,160                              | Bright     | sZ       | 3,001                  | -                          | SupplierStandard | 1,531          |
| 103105803100259 | 58               | 2,160                              | Bright     | zS       | 3,001                  | -                          | SupplierStandard | 1,531          |
| 103105904250259 | 59               | 1,770                              | Galvanized | sZ       | 2,546                  | -                          | SupplierStandard | 1,566          |
| 103105903250259 | 59               | 1,770                              | Galvanized | zS       | 2,546                  | -                          | SupplierStandard | 1,566          |
| 103105904050259 | 59               | 1,770                              | Bright     | sZ       | 2,546                  | -                          | SupplierStandard | 1,566          |
| 103105903050259 | 59               | 1,770                              | Bright     | zS       | 2,546                  | -                          | SupplierStandard | 1,566          |
| 103105904270259 | 59               | 1,960                              | Galvanized | sZ       | 2,819                  | -                          | SupplierStandard | 1,566          |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103105903270259 | 59                  | 1,960                                 | Galvanized | zS       | 2,819                     | -                             | SupplierStandard | 1,566             |
| 103105904070259 | 59                  | 1,960                                 | Bright     | sZ       | 2,819                     | -                             | SupplierStandard | 1,566             |
| 103105903070259 | 59                  | 1,960                                 | Bright     | zS       | 2,819                     | -                             | SupplierStandard | 1,566             |
| 103105904300259 | 59                  | 2,160                                 | Galvanized | sZ       | 3,070                     | -                             | SupplierStandard | 1,566             |
| 103105903300259 | 59                  | 2,160                                 | Galvanized | zS       | 3,070                     | -                             | SupplierStandard | 1,566             |
| 103105904100259 | 59                  | 2,160                                 | Bright     | sZ       | 3,070                     | -                             | SupplierStandard | 1,566             |
| 103105903100259 | 59                  | 2,160                                 | Bright     | zS       | 3,070                     | -                             | SupplierStandard | 1,566             |
| 103106004250259 | 60                  | 1,770                                 | Galvanized | sZ       | 2,659                     | -                             | SupplierStandard | 1,640             |
| 103106003250259 | 60                  | 1,770                                 | Galvanized | zS       | 2,659                     | -                             | SupplierStandard | 1,640             |
| 103106004050259 | 60                  | 1,770                                 | Bright     | sZ       | 2,659                     | -                             | SupplierStandard | 1,640             |
| 103106003050259 | 60                  | 1,770                                 | Bright     | zS       | 2,659                     | -                             | SupplierStandard | 1,640             |
| 103106004270259 | 60                  | 1,960                                 | Galvanized | sZ       | 2,954                     | -                             | SupplierStandard | 1,640             |
| 103106003270259 | 60                  | 1,960                                 | Galvanized | zS       | 2,954                     | -                             | SupplierStandard | 1,640             |
| 103106004070259 | 60                  | 1,960                                 | Bright     | sZ       | 2,954                     | -                             | SupplierStandard | 1,640             |
| 103106003070259 | 60                  | 1,960                                 | Bright     | zS       | 2,954                     | -                             | SupplierStandard | 1,640             |
| 103106004300259 | 60                  | 2,160                                 | Galvanized | sZ       | 3,214                     | -                             | SupplierStandard | 1,640             |
| 103106003300259 | 60                  | 2,160                                 | Galvanized | zS       | 3,214                     | -                             | SupplierStandard | 1,640             |
| 103106004100259 | 60                  | 2,160                                 | Bright     | sZ       | 3,214                     | -                             | SupplierStandard | 1,640             |
| 103106003100259 | 60                  | 2,160                                 | Bright     | zS       | 3,214                     | -                             | SupplierStandard | 1,640             |
| 103106104250259 | 61                  | 1,770                                 | Galvanized | sZ       | 2,722                     | -                             | SupplierStandard | 1,674             |
| 103106103250259 | 61                  | 1,770                                 | Galvanized | zS       | 2,722                     | -                             | SupplierStandard | 1,674             |
| 103106104050259 | 61                  | 1,770                                 | Bright     | sZ       | 2,722                     | -                             | SupplierStandard | 1,674             |
| 103106103050259 | 61                  | 1,770                                 | Bright     | zS       | 2,722                     | -                             | SupplierStandard | 1,674             |
| 103106104270259 | 61                  | 1,960                                 | Galvanized | sZ       | 3,013                     | -                             | SupplierStandard | 1,674             |
| 103106103270259 | 61                  | 1,960                                 | Galvanized | zS       | 3,013                     | -                             | SupplierStandard | 1,674             |
| 103106104070259 | 61                  | 1,960                                 | Bright     | sZ       | 3,013                     | -                             | SupplierStandard | 1,674             |
| 103106103070259 | 61                  | 1,960                                 | Bright     | zS       | 3,013                     | -                             | SupplierStandard | 1,674             |
| 103106104300259 | 61                  | 2,160                                 | Galvanized | sZ       | 3,282                     | -                             | SupplierStandard | 1,674             |
| 103106103300259 | 61                  | 2,160                                 | Galvanized | zS       | 3,282                     | -                             | SupplierStandard | 1,674             |
| 103106104100259 | 61                  | 2,160                                 | Bright     | sZ       | 3,282                     | -                             | SupplierStandard | 1,674             |
| 103106103100259 | 61                  | 2,160                                 | Bright     | zS       | 3,282                     | -                             | SupplierStandard | 1,674             |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103106204250259 | 62                  | 1,770                                 | Galvanized | sZ       | 2,811                     | -                             | SupplierStandard | 1,729             |
| 103106203250259 | 62                  | 1,770                                 | Galvanized | zS       | 2,811                     | -                             | SupplierStandard | 1,729             |
| 103106204050259 | 62                  | 1,770                                 | Bright     | sZ       | 2,811                     | -                             | SupplierStandard | 1,729             |
| 103106203050259 | 62                  | 1,770                                 | Bright     | zS       | 2,811                     | -                             | SupplierStandard | 1,729             |
| 103106204270259 | 62                  | 1,960                                 | Galvanized | sZ       | 3,113                     | -                             | SupplierStandard | 1,729             |
| 103106203270259 | 62                  | 1,960                                 | Galvanized | zS       | 3,113                     | -                             | SupplierStandard | 1,729             |
| 103106204070259 | 62                  | 1,960                                 | Bright     | sZ       | 3,113                     | -                             | SupplierStandard | 1,729             |
| 103106203070259 | 62                  | 1,960                                 | Bright     | zS       | 3,113                     | -                             | SupplierStandard | 1,729             |
| 103106204300259 | 62                  | 2,160                                 | Galvanized | sZ       | 3,390                     | -                             | SupplierStandard | 1,729             |
| 103106203300259 | 62                  | 2,160                                 | Galvanized | zS       | 3,390                     | -                             | SupplierStandard | 1,729             |
| 103106204100259 | 62                  | 2,160                                 | Bright     | sZ       | 3,390                     | -                             | SupplierStandard | 1,729             |
| 103106203100259 | 62                  | 2,160                                 | Bright     | zS       | 3,390                     | -                             | SupplierStandard | 1,729             |
| 103106304250259 | 63                  | 1,770                                 | Galvanized | sZ       | 2,903                     | -                             | SupplierStandard | 1,786             |
| 103106303250259 | 63                  | 1,770                                 | Galvanized | zS       | 2,903                     | -                             | SupplierStandard | 1,786             |
| 103106304050259 | 63                  | 1,770                                 | Bright     | sZ       | 2,903                     | -                             | SupplierStandard | 1,786             |
| 103106303050259 | 63                  | 1,770                                 | Bright     | zS       | 2,903                     | -                             | SupplierStandard | 1,786             |
| 103106304270259 | 63                  | 1,960                                 | Galvanized | sZ       | 3,214                     | -                             | SupplierStandard | 1,786             |
| 103106303270259 | 63                  | 1,960                                 | Galvanized | zS       | 3,214                     | -                             | SupplierStandard | 1,786             |
| 103106304070259 | 63                  | 1,960                                 | Bright     | sZ       | 3,214                     | -                             | SupplierStandard | 1,786             |
| 103106303070259 | 63                  | 1,960                                 | Bright     | zS       | 3,214                     | -                             | SupplierStandard | 1,786             |
| 103106304300259 | 63                  | 2,160                                 | Galvanized | sZ       | 3,500                     | -                             | SupplierStandard | 1,786             |
| 103106303300259 | 63                  | 2,160                                 | Galvanized | zS       | 3,500                     | -                             | SupplierStandard | 1,786             |
| 103106304100259 | 63                  | 2,160                                 | Bright     | sZ       | 3,500                     | -                             | SupplierStandard | 1,786             |
| 103106303100259 | 63                  | 2,160                                 | Bright     | zS       | 3,500                     | -                             | SupplierStandard | 1,786             |
| 103106404250259 | 64                  | 1,770                                 | Galvanized | sZ       | 2,996                     | -                             | SupplierStandard | 1,843             |
| 103106403250259 | 64                  | 1,770                                 | Galvanized | zS       | 2,996                     | -                             | SupplierStandard | 1,843             |
| 103106404050259 | 64                  | 1,770                                 | Bright     | sZ       | 2,996                     | -                             | SupplierStandard | 1,843             |
| 103106403050259 | 64                  | 1,770                                 | Bright     | zS       | 2,996                     | -                             | SupplierStandard | 1,843             |
| 103106404270259 | 64                  | 1,960                                 | Galvanized | sZ       | 3,317                     | -                             | SupplierStandard | 1,843             |
| 103106403270259 | 64                  | 1,960                                 | Galvanized | zS       | 3,317                     | -                             | SupplierStandard | 1,843             |
| 103106404070259 | 64                  | 1,960                                 | Bright     | sZ       | 3,317                     | -                             | SupplierStandard | 1,843             |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103106403070259 | 64                  | 1,960                                 | Bright     | zS       | 3,317                     | -                             | SupplierStandard | 1,843             |
| 103106404300259 | 64                  | 2,160                                 | Galvanized | sZ       | 3,612                     | -                             | SupplierStandard | 1,843             |
| 103106403300259 | 64                  | 2,160                                 | Galvanized | zS       | 3,612                     | -                             | SupplierStandard | 1,843             |
| 103106404100259 | 64                  | 2,160                                 | Bright     | sZ       | 3,612                     | -                             | SupplierStandard | 1,843             |
| 103106403100259 | 64                  | 2,160                                 | Bright     | zS       | 3,612                     | -                             | SupplierStandard | 1,843             |
| 103106504250259 | 65                  | 1,770                                 | Galvanized | sZ       | 3,090                     | -                             | SupplierStandard | 1,901             |
| 103106503250259 | 65                  | 1,770                                 | Galvanized | zS       | 3,090                     | -                             | SupplierStandard | 1,901             |
| 103106504050259 | 65                  | 1,770                                 | Bright     | sZ       | 3,090                     | -                             | SupplierStandard | 1,901             |
| 103106503050259 | 65                  | 1,770                                 | Bright     | zS       | 3,090                     | -                             | SupplierStandard | 1,901             |
| 103106504270259 | 65                  | 1,960                                 | Galvanized | sZ       | 3,421                     | -                             | SupplierStandard | 1,901             |
| 103106503270259 | 65                  | 1,960                                 | Galvanized | zS       | 3,421                     | -                             | SupplierStandard | 1,901             |
| 103106504070259 | 65                  | 1,960                                 | Bright     | sZ       | 3,421                     | -                             | SupplierStandard | 1,901             |
| 103106503070259 | 65                  | 1,960                                 | Bright     | zS       | 3,421                     | -                             | SupplierStandard | 1,901             |
| 103106504300259 | 65                  | 2,160                                 | Galvanized | sZ       | 3,727                     | -                             | SupplierStandard | 1,901             |
| 103106503300259 | 65                  | 2,160                                 | Galvanized | zS       | 3,727                     | -                             | SupplierStandard | 1,901             |
| 103106504100259 | 65                  | 2,160                                 | Bright     | sZ       | 3,727                     | -                             | SupplierStandard | 1,901             |
| 103106503100259 | 65                  | 2,160                                 | Bright     | zS       | 3,727                     | -                             | SupplierStandard | 1,901             |
| 103106604250259 | 66                  | 1,770                                 | Galvanized | sZ       | 3,186                     | -                             | SupplierStandard | 1,960             |
| 103106603250259 | 66                  | 1,770                                 | Galvanized | zS       | 3,186                     | -                             | SupplierStandard | 1,960             |
| 103106604050259 | 66                  | 1,770                                 | Bright     | sZ       | 3,186                     | -                             | SupplierStandard | 1,960             |
| 103106603050259 | 66                  | 1,770                                 | Bright     | zS       | 3,186                     | -                             | SupplierStandard | 1,960             |
| 103106604270259 | 66                  | 1,960                                 | Galvanized | sZ       | 3,528                     | -                             | SupplierStandard | 1,960             |
| 103106603270259 | 66                  | 1,960                                 | Galvanized | zS       | 3,528                     | -                             | SupplierStandard | 1,960             |
| 103106604070259 | 66                  | 1,960                                 | Bright     | sZ       | 3,528                     | -                             | SupplierStandard | 1,960             |
| 103106603070259 | 66                  | 1,960                                 | Bright     | zS       | 3,528                     | -                             | SupplierStandard | 1,960             |
| 103106604300259 | 66                  | 2,160                                 | Galvanized | sZ       | 3,842                     | -                             | SupplierStandard | 1,960             |
| 103106603300259 | 66                  | 2,160                                 | Galvanized | zS       | 3,842                     | -                             | SupplierStandard | 1,960             |
| 103106604100259 | 66                  | 2,160                                 | Bright     | sZ       | 3,842                     | -                             | SupplierStandard | 1,960             |
| 103106603100259 | 66                  | 2,160                                 | Bright     | zS       | 3,842                     | -                             | SupplierStandard | 1,960             |
| 103106704250259 | 67                  | 1,770                                 | Galvanized | sZ       | 3,283                     | -                             | SupplierStandard | 2,019             |
| 103106703250259 | 67                  | 1,770                                 | Galvanized | zS       | 3,283                     | -                             | SupplierStandard | 2,019             |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|-----------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 103106704050259 | 67               | 1,770                              | Bright     | sZ       | 3,283                  | -                          | SupplierStandard | 2,019          |
| 103106703050259 | 67               | 1,770                              | Bright     | zS       | 3,283                  | -                          | SupplierStandard | 2,019          |
| 103106704270259 | 67               | 1,960                              | Galvanized | sZ       | 3,635                  | -                          | SupplierStandard | 2,019          |
| 103106703270259 | 67               | 1,960                              | Galvanized | zS       | 3,635                  | -                          | SupplierStandard | 2,019          |
| 103106704070259 | 67               | 1,960                              | Bright     | sZ       | 3,635                  | -                          | SupplierStandard | 2,019          |
| 103106703070259 | 67               | 1,960                              | Bright     | zS       | 3,635                  | -                          | SupplierStandard | 2,019          |
| 103106704300259 | 67               | 2,160                              | Galvanized | sZ       | 3,959                  | -                          | SupplierStandard | 2,019          |
| 103106703300259 | 67               | 2,160                              | Galvanized | zS       | 3,959                  | -                          | SupplierStandard | 2,019          |
| 103106704100259 | 67               | 2,160                              | Bright     | sZ       | 3,959                  | -                          | SupplierStandard | 2,019          |
| 103106703100259 | 67               | 2,160                              | Bright     | zS       | 3,959                  | -                          | SupplierStandard | 2,019          |
| 103106804250259 | 68               | 1,770                              | Galvanized | sZ       | 3,382                  | -                          | SupplierStandard | 2,080          |
| 103106803250259 | 68               | 1,770                              | Galvanized | zS       | 3,382                  | -                          | SupplierStandard | 2,080          |
| 103106804050259 | 68               | 1,770                              | Bright     | sZ       | 3,382                  | -                          | SupplierStandard | 2,080          |
| 103106803050259 | 68               | 1,770                              | Bright     | zS       | 3,382                  | -                          | SupplierStandard | 2,080          |
| 103106804270259 | 68               | 1,960                              | Galvanized | sZ       | 3,745                  | -                          | SupplierStandard | 2,080          |
| 103106803270259 | 68               | 1,960                              | Galvanized | zS       | 3,745                  | -                          | SupplierStandard | 2,080          |
| 103106804070259 | 68               | 1,960                              | Bright     | sZ       | 3,745                  | -                          | SupplierStandard | 2,080          |
| 103106803070259 | 68               | 1,960                              | Bright     | zS       | 3,745                  | -                          | SupplierStandard | 2,080          |
| 103106804300259 | 68               | 2,160                              | Galvanized | sZ       | 4,078                  | -                          | SupplierStandard | 2,080          |
| 103106803300259 | 68               | 2,160                              | Galvanized | zS       | 4,078                  | -                          | SupplierStandard | 2,080          |
| 103106804100259 | 68               | 2,160                              | Bright     | sZ       | 4,078                  | -                          | SupplierStandard | 2,080          |
| 103106803100259 | 68               | 2,160                              | Bright     | zS       | 4,078                  | -                          | SupplierStandard | 2,080          |
| 103106904250259 | 69               | 1,770                              | Galvanized | sZ       | 3,482                  | -                          | SupplierStandard | 2,142          |
| 103106903250259 | 69               | 1,770                              | Galvanized | zS       | 3,482                  | -                          | SupplierStandard | 2,142          |
| 103106904050259 | 69               | 1,770                              | Bright     | sZ       | 3,482                  | -                          | SupplierStandard | 2,142          |
| 103106903050259 | 69               | 1,770                              | Bright     | zS       | 3,482                  | -                          | SupplierStandard | 2,142          |
| 103106904270259 | 69               | 1,960                              | Galvanized | sZ       | 3,856                  | -                          | SupplierStandard | 2,142          |
| 103106903270259 | 69               | 1,960                              | Galvanized | zS       | 3,856                  | -                          | SupplierStandard | 2,142          |
| 103106904070259 | 69               | 1,960                              | Bright     | sZ       | 3,856                  | -                          | SupplierStandard | 2,142          |
| 103106903070259 | 69               | 1,960                              | Bright     | zS       | 3,856                  | -                          | SupplierStandard | 2,142          |
| 103106904300259 | 69               | 2,160                              | Galvanized | sZ       | 4,199                  | -                          | SupplierStandard | 2,142          |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103106903300259 | 69                  | 2,160                                 | Galvanized | zS       | 4,199                     | -                             | SupplierStandard | 2,142             |
| 103106904100259 | 69                  | 2,160                                 | Bright     | sZ       | 4,199                     | -                             | SupplierStandard | 2,142             |
| 103106903100259 | 69                  | 2,160                                 | Bright     | zS       | 4,199                     | -                             | SupplierStandard | 2,142             |
| 103107004250259 | 70                  | 1,770                                 | Galvanized | sZ       | 3,584                     | -                             | SupplierStandard | 2,204             |
| 103107003250259 | 70                  | 1,770                                 | Galvanized | zS       | 3,584                     | -                             | SupplierStandard | 2,204             |
| 103107004050259 | 70                  | 1,770                                 | Bright     | sZ       | 3,584                     | -                             | SupplierStandard | 2,204             |
| 103107003050259 | 70                  | 1,770                                 | Bright     | zS       | 3,584                     | -                             | SupplierStandard | 2,204             |
| 103107004270259 | 70                  | 1,960                                 | Galvanized | sZ       | 3,968                     | -                             | SupplierStandard | 2,204             |
| 103107003270259 | 70                  | 1,960                                 | Galvanized | zS       | 3,968                     | -                             | SupplierStandard | 2,204             |
| 103107004070259 | 70                  | 1,960                                 | Bright     | sZ       | 3,968                     | -                             | SupplierStandard | 2,204             |
| 103107003070259 | 70                  | 1,960                                 | Bright     | zS       | 3,968                     | -                             | SupplierStandard | 2,204             |
| 103107004300259 | 70                  | 2,160                                 | Galvanized | sZ       | 4,321                     | -                             | SupplierStandard | 2,204             |
| 103107003300259 | 70                  | 2,160                                 | Galvanized | zS       | 4,321                     | -                             | SupplierStandard | 2,204             |
| 103107004100259 | 70                  | 2,160                                 | Bright     | sZ       | 4,321                     | -                             | SupplierStandard | 2,204             |
| 103107003100259 | 70                  | 2,160                                 | Bright     | zS       | 4,321                     | -                             | SupplierStandard | 2,204             |
| 103107104250259 | 71                  | 1,770                                 | Galvanized | sZ       | 3,687                     | -                             | SupplierStandard | 2,268             |
| 103107103250259 | 71                  | 1,770                                 | Galvanized | zS       | 3,687                     | -                             | SupplierStandard | 2,268             |
| 103107104050259 | 71                  | 1,770                                 | Bright     | sZ       | 3,687                     | -                             | SupplierStandard | 2,268             |
| 103107103050259 | 71                  | 1,770                                 | Bright     | zS       | 3,687                     | -                             | SupplierStandard | 2,268             |
| 103107104270259 | 71                  | 1,960                                 | Galvanized | sZ       | 4,082                     | -                             | SupplierStandard | 2,268             |
| 103107103270259 | 71                  | 1,960                                 | Galvanized | zS       | 4,082                     | -                             | SupplierStandard | 2,268             |
| 103107104070259 | 71                  | 1,960                                 | Bright     | sZ       | 4,082                     | -                             | SupplierStandard | 2,268             |
| 103107103070259 | 71                  | 1,960                                 | Bright     | zS       | 4,082                     | -                             | SupplierStandard | 2,268             |
| 103107104300259 | 71                  | 2,160                                 | Galvanized | sZ       | 4,446                     | -                             | SupplierStandard | 2,268             |
| 103107103300259 | 71                  | 2,160                                 | Galvanized | zS       | 4,446                     | -                             | SupplierStandard | 2,268             |
| 103107104100259 | 71                  | 2,160                                 | Bright     | sZ       | 4,446                     | -                             | SupplierStandard | 2,268             |
| 103107103100259 | 71                  | 2,160                                 | Bright     | zS       | 4,446                     | -                             | SupplierStandard | 2,268             |
| 103107204250259 | 72                  | 1,770                                 | Galvanized | sZ       | 3,792                     | -                             | SupplierStandard | 2,332             |
| 103107203250259 | 72                  | 1,770                                 | Galvanized | zS       | 3,792                     | -                             | SupplierStandard | 2,332             |
| 103107204050259 | 72                  | 1,770                                 | Bright     | sZ       | 3,792                     | -                             | SupplierStandard | 2,332             |
| 103107203050259 | 72                  | 1,770                                 | Bright     | zS       | 3,792                     | -                             | SupplierStandard | 2,332             |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103107204270259 | 72                  | 1,960                                 | Galvanized | sZ       | 4,198                     | -                             | SupplierStandard | 2,332             |
| 103107203270259 | 72                  | 1,960                                 | Galvanized | zS       | 4,198                     | -                             | SupplierStandard | 2,332             |
| 103107204070259 | 72                  | 1,960                                 | Bright     | sZ       | 4,198                     | -                             | SupplierStandard | 2,332             |
| 103107203070259 | 72                  | 1,960                                 | Bright     | zS       | 4,198                     | -                             | SupplierStandard | 2,332             |
| 103107204300259 | 72                  | 2,160                                 | Galvanized | sZ       | 4,572                     | -                             | SupplierStandard | 2,332             |
| 103107203300259 | 72                  | 2,160                                 | Galvanized | zS       | 4,572                     | -                             | SupplierStandard | 2,332             |
| 103107204100259 | 72                  | 2,160                                 | Bright     | sZ       | 4,572                     | -                             | SupplierStandard | 2,332             |
| 103107203100259 | 72                  | 2,160                                 | Bright     | zS       | 4,572                     | -                             | SupplierStandard | 2,332             |
| 103107304250259 | 73                  | 1,770                                 | Galvanized | sZ       | 3,897                     | -                             | SupplierStandard | 2,397             |
| 103107303250259 | 73                  | 1,770                                 | Galvanized | zS       | 3,897                     | -                             | SupplierStandard | 2,397             |
| 103107304050259 | 73                  | 1,770                                 | Bright     | sZ       | 3,897                     | -                             | SupplierStandard | 2,397             |
| 103107303050259 | 73                  | 1,770                                 | Bright     | zS       | 3,897                     | -                             | SupplierStandard | 2,397             |
| 103107304270259 | 73                  | 1,960                                 | Galvanized | sZ       | 4,315                     | -                             | SupplierStandard | 2,397             |
| 103107303270259 | 73                  | 1,960                                 | Galvanized | zS       | 4,315                     | -                             | SupplierStandard | 2,397             |
| 103107304070259 | 73                  | 1,960                                 | Bright     | sZ       | 4,315                     | -                             | SupplierStandard | 2,397             |
| 103107303070259 | 73                  | 1,960                                 | Bright     | zS       | 4,315                     | -                             | SupplierStandard | 2,397             |
| 103107304300259 | 73                  | 2,160                                 | Galvanized | sZ       | 4,700                     | -                             | SupplierStandard | 2,397             |
| 103107303300259 | 73                  | 2,160                                 | Galvanized | zS       | 4,700                     | -                             | SupplierStandard | 2,397             |
| 103107304100259 | 73                  | 2,160                                 | Bright     | sZ       | 4,700                     | -                             | SupplierStandard | 2,397             |
| 103107303100259 | 73                  | 2,160                                 | Bright     | zS       | 4,700                     | -                             | SupplierStandard | 2,397             |
| 103107404250259 | 74                  | 1,770                                 | Galvanized | sZ       | 4,005                     | -                             | SupplierStandard | 2,463             |
| 103107403250259 | 74                  | 1,770                                 | Galvanized | zS       | 4,005                     | -                             | SupplierStandard | 2,463             |
| 103107404050259 | 74                  | 1,770                                 | Bright     | sZ       | 4,005                     | -                             | SupplierStandard | 2,463             |
| 103107403050259 | 74                  | 1,770                                 | Bright     | zS       | 4,005                     | -                             | SupplierStandard | 2,463             |
| 103107404270259 | 74                  | 1,960                                 | Galvanized | sZ       | 4,435                     | -                             | SupplierStandard | 2,463             |
| 103107403270259 | 74                  | 1,960                                 | Galvanized | zS       | 4,435                     | -                             | SupplierStandard | 2,463             |
| 103107404070259 | 74                  | 1,960                                 | Bright     | sZ       | 4,435                     | -                             | SupplierStandard | 2,463             |
| 103107403070259 | 74                  | 1,960                                 | Bright     | zS       | 4,435                     | -                             | SupplierStandard | 2,463             |
| 103107404300259 | 74                  | 2,160                                 | Galvanized | sZ       | 4,830                     | -                             | SupplierStandard | 2,463             |
| 103107403300259 | 74                  | 2,160                                 | Galvanized | zS       | 4,830                     | -                             | SupplierStandard | 2,463             |
| 103107404100259 | 74                  | 2,160                                 | Bright     | sZ       | 4,830                     | -                             | SupplierStandard | 2,463             |

## Steel wire rope Diepa X43

### Technical data

| Part code       | Rope diameter<br>mm | Tensile strength<br>N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force<br>kN | Steel area<br>mm <sup>2</sup> | Lubrication      | Weight<br>kg/100m |
|-----------------|---------------------|---------------------------------------|------------|----------|---------------------------|-------------------------------|------------------|-------------------|
| 103107403100259 | 74                  | 2,160                                 | Bright     | zS       | 4,830                     | -                             | SupplierStandard | 2,463             |
| 103107504250259 | 75                  | 1,770                                 | Galvanized | sZ       | 4,114                     | -                             | SupplierStandard | 2,531             |
| 103107503250259 | 75                  | 1,770                                 | Galvanized | zS       | 4,114                     | -                             | SupplierStandard | 2,531             |
| 103107504050259 | 75                  | 1,770                                 | Bright     | sZ       | 4,114                     | -                             | SupplierStandard | 2,531             |
| 103107503050259 | 75                  | 1,770                                 | Bright     | zS       | 4,114                     | -                             | SupplierStandard | 2,531             |
| 103107504270259 | 75                  | 1,960                                 | Galvanized | sZ       | 4,555                     | -                             | SupplierStandard | 2,531             |
| 103107503270259 | 75                  | 1,960                                 | Galvanized | zS       | 4,555                     | -                             | SupplierStandard | 2,531             |
| 103107504070259 | 75                  | 1,960                                 | Bright     | sZ       | 4,555                     | -                             | SupplierStandard | 2,531             |
| 103107503070259 | 75                  | 1,960                                 | Bright     | zS       | 4,555                     | -                             | SupplierStandard | 2,531             |
| 103107504300259 | 75                  | 2,160                                 | Galvanized | sZ       | 4,961                     | -                             | SupplierStandard | 2,531             |
| 103107503300259 | 75                  | 2,160                                 | Galvanized | zS       | 4,961                     | -                             | SupplierStandard | 2,531             |
| 103107504100259 | 75                  | 2,160                                 | Bright     | sZ       | 4,961                     | -                             | SupplierStandard | 2,531             |
| 103107503100259 | 75                  | 2,160                                 | Bright     | zS       | 4,961                     | -                             | SupplierStandard | 2,531             |