
CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Product information



Tower crane

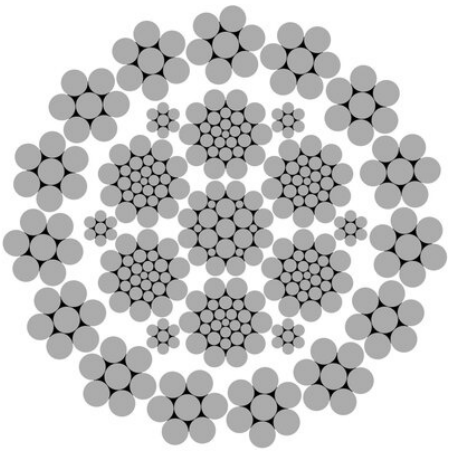

Mobile crane



Crawler crane





Diepa B45 is a rotation-resistant wire rope with non-compacted outer strands.
Applications: Can be universally used as hoisting rope for mobile cranes, crawler cranes, tower cranes.

Total numbers of wires: 328.
ISO 4309 Rope Category No: 4-49 mm **RCN.23-2 /** 50-70 mm **RCN.27** ... *Read more*

Marking: According to standard
Finish: Galvanized or bright.
Standard: EN 12385-4

Fill factor: 0.6511
RCN: 23-2

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102100604050169	6	1,770	Bright	sZ	25.4	SupplierStandard	16
102100606050169	6	1,770	Bright	zZ	25.4	SupplierStandard	16
102100604250169	6	1,770	Galvanized	sZ	25.4	SupplierStandard	16
102100606250169	6	1,770	Galvanized	zZ	25.4	SupplierStandard	16
102100604070169	6	1,960	Bright	sZ	28.1	SupplierStandard	16
102100606070169	6	1,960	Bright	zZ	28.1	SupplierStandard	16
102100604270169	6	1,960	Galvanized	sZ	28.1	SupplierStandard	16
102100606270169	6	1,960	Galvanized	zZ	28.1	SupplierStandard	16
102100604100169	6	2,160	Bright	sZ	29.8	SupplierStandard	16
102100606100169	6	2,160	Bright	zZ	29.8	SupplierStandard	16
102100604300169	6	2,160	Galvanized	sZ	29.8	SupplierStandard	16
102100606300169	6	2,160	Galvanized	zZ	29.8	SupplierStandard	16
102100704050169	7	1,770	Bright	sZ	34.6	SupplierStandard	22
102100706050169	7	1,770	Bright	zZ	34.6	SupplierStandard	22
102100704250169	7	1,770	Galvanized	sZ	34.6	SupplierStandard	22
102100706250169	7	1,770	Galvanized	zZ	34.6	SupplierStandard	22
102100704070169	7	1,960	Bright	sZ	38.3	SupplierStandard	22
102100706070169	7	1,960	Bright	zZ	38.3	SupplierStandard	22
102100704270169	7	1,960	Galvanized	sZ	38.3	SupplierStandard	22
102100706270169	7	1,960	Galvanized	zZ	38.3	SupplierStandard	22
102100704100169	7	2,160	Bright	sZ	40.6	SupplierStandard	22
102100706100169	7	2,160	Bright	zZ	40.6	SupplierStandard	22
102100704300169	7	2,160	Galvanized	sZ	40.6	SupplierStandard	22
102100706300169	7	2,160	Galvanized	zZ	40.6	SupplierStandard	22
102100804050169	8	1,770	Bright	sZ	45.2	SupplierStandard	28
102100806050169	8	1,770	Bright	zZ	45.2	SupplierStandard	28
102100804250169	8	1,770	Galvanized	sZ	45.2	SupplierStandard	28
102100806250169	8	1,770	Galvanized	zZ	45.2	SupplierStandard	28
102100804070169	8	1,960	Bright	sZ	49.5	SupplierStandard	28
102100806070169	8	1,960	Bright	zZ	49.5	SupplierStandard	28
102100804270169	8	1,960	Galvanized	sZ	49.5	SupplierStandard	28

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102100806270169	8	1,960	Galvanized	zZ	49.5	SupplierStandard	28
102100804100169	8	2,160	Bright	sZ	53	SupplierStandard	28
102100806100169	8	2,160	Bright	zZ	53	SupplierStandard	28
102100804300169	8	2,160	Galvanized	sZ	53	SupplierStandard	28
102100806300169	8	2,160	Galvanized	zZ	53	SupplierStandard	28
102100904050169	9	1,770	Bright	sZ	57.2	SupplierStandard	36
102100906050169	9	1,770	Bright	zZ	57.2	SupplierStandard	36
102100904250169	9	1,770	Galvanized	sZ	57.2	SupplierStandard	36
102100906250169	9	1,770	Galvanized	zZ	57.2	SupplierStandard	36
102100904070169	9	1,960	Bright	sZ	62.8	SupplierStandard	36
102100906070169	9	1,960	Bright	zZ	62.8	SupplierStandard	36
102100904270169	9	1,960	Galvanized	sZ	62.8	SupplierStandard	36
102100906270169	9	1,960	Galvanized	zZ	62.8	SupplierStandard	36
102100904100169	9	2,160	Bright	sZ	67	SupplierStandard	36
102100906100169	9	2,160	Bright	zZ	67	SupplierStandard	36
102100904300169	9	2,160	Galvanized	sZ	67	SupplierStandard	36
102100906300169	9	2,160	Galvanized	zZ	67	SupplierStandard	36
102101004050169	10	1,770	Bright	sZ	70.6	SupplierStandard	44
102101006050169	10	1,770	Bright	zZ	70.6	SupplierStandard	44
102101004250169	10	1,770	Galvanized	sZ	70.6	SupplierStandard	44
102101006250169	10	1,770	Galvanized	zZ	70.6	SupplierStandard	44
102101004070169	10	1,960	Bright	sZ	78	SupplierStandard	44
102101006070169	10	1,960	Bright	zZ	78	SupplierStandard	44
102101004270169	10	1,960	Galvanized	sZ	78	SupplierStandard	44
102101006270169	10	1,960	Galvanized	zZ	78	SupplierStandard	44
102101004100169	10	2,160	Bright	sZ	82.9	SupplierStandard	44
102101006100169	10	2,160	Bright	zZ	82.9	SupplierStandard	44
102101004300169	10	2,160	Galvanized	sZ	82.9	SupplierStandard	44
102101006300169	10	2,160	Galvanized	zZ	82.9	SupplierStandard	44
102101104050169	11	1,770	Bright	sZ	86.8	SupplierStandard	55
102101106050169	11	1,770	Bright	zZ	86.8	SupplierStandard	55

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102101104250169	11	1,770	Galvanized	sZ	86.8	SupplierStandard	55
102101106250169	11	1,770	Galvanized	zZ	86.8	SupplierStandard	55
102101104070169	11	1,960	Bright	sZ	97.1	SupplierStandard	55
102101106070169	11	1,960	Bright	zZ	97.1	SupplierStandard	55
102101104270169	11	1,960	Galvanized	sZ	97.1	SupplierStandard	55
102101106270169	11	1,960	Galvanized	zZ	97.1	SupplierStandard	55
102101104100169	11	2,160	Bright	sZ	103	SupplierStandard	55
102101106100169	11	2,160	Bright	zZ	103	SupplierStandard	55
102101104300169	11	2,160	Galvanized	sZ	103	SupplierStandard	55
102101106300169	11	2,160	Galvanized	zZ	103	SupplierStandard	55
102101204050169	12	1,770	Bright	sZ	103	SupplierStandard	65
102101206050169	12	1,770	Bright	zZ	103	SupplierStandard	65
102101204250169	12	1,770	Galvanized	sZ	103	SupplierStandard	65
102101206250169	12	1,770	Galvanized	zZ	103	SupplierStandard	65
102101204070169	12	1,960	Bright	sZ	115	SupplierStandard	65
102101206070169	12	1,960	Bright	zZ	115	SupplierStandard	65
102101204270169	12	1,960	Galvanized	sZ	115	SupplierStandard	65
102101206270169	12	1,960	Galvanized	zZ	115	SupplierStandard	65
102101204100169	12	2,160	Bright	sZ	122	SupplierStandard	65
102101206100169	12	2,160	Bright	zZ	122	SupplierStandard	65
102101204300169	12	2,160	Galvanized	sZ	122	SupplierStandard	65
102101206300169	12	2,160	Galvanized	zZ	122	SupplierStandard	65
102101304050169	13	1,770	Bright	sZ	120	SupplierStandard	75
102101306050169	13	1,770	Bright	zZ	120	SupplierStandard	75
102101304250169	13	1,770	Galvanized	sZ	120	SupplierStandard	75
102101306250169	13	1,770	Galvanized	zZ	120	SupplierStandard	75
102101304070169	13	1,960	Bright	sZ	133	SupplierStandard	75
102101306070169	13	1,960	Bright	zZ	133	SupplierStandard	75
102101304270169	13	1,960	Galvanized	sZ	133	SupplierStandard	75
102101306270169	13	1,960	Galvanized	zZ	133	SupplierStandard	75
102101304100169	13	2,160	Bright	sZ	140	SupplierStandard	75

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102101306100169	13	2,160	Bright	zZ	140	SupplierStandard	75
102101304300169	13	2,160	Galvanized	sZ	140	SupplierStandard	75
102101306300169	13	2,160	Galvanized	zZ	140	SupplierStandard	75
102101404050169	14	1,770	Bright	sZ	139	SupplierStandard	87
102101406050169	14	1,770	Bright	zZ	139	SupplierStandard	87
102101404250169	14	1,770	Galvanized	sZ	139	SupplierStandard	87
102101406250169	14	1,770	Galvanized	zZ	139	SupplierStandard	87
102101404070169	14	1,960	Bright	sZ	154	SupplierStandard	87
102101406070169	14	1,960	Bright	zZ	154	SupplierStandard	87
102101404270169	14	1,960	Galvanized	sZ	154	SupplierStandard	87
102101406270169	14	1,960	Galvanized	zZ	154	SupplierStandard	87
102101404100169	14	2,160	Bright	sZ	163	SupplierStandard	87
102101406100169	14	2,160	Bright	zZ	163	SupplierStandard	87
102101404300169	14	2,160	Galvanized	sZ	163	SupplierStandard	87
102101406300169	14	2,160	Galvanized	zZ	163	SupplierStandard	87
102101504050169	15	1,770	Bright	sZ	158	SupplierStandard	99
102101506050169	15	1,770	Bright	zZ	158	SupplierStandard	99
102101504250169	15	1,770	Galvanized	sZ	158	SupplierStandard	99
102101506250169	15	1,770	Galvanized	zZ	158	SupplierStandard	99
102101504070169	15	1,960	Bright	sZ	176	SupplierStandard	99
102101506070169	15	1,960	Bright	zZ	176	SupplierStandard	99
102101504270169	15	1,960	Galvanized	sZ	176	SupplierStandard	99
102101506270169	15	1,960	Galvanized	zZ	176	SupplierStandard	99
102101504100169	15	2,160	Bright	sZ	185	SupplierStandard	99
102101506100169	15	2,160	Bright	zZ	185	SupplierStandard	99
102101504300169	15	2,160	Galvanized	sZ	185	SupplierStandard	99
102101506300169	15	2,160	Galvanized	zZ	185	SupplierStandard	99
102101604050169	16	1,770	Bright	sZ	179	SupplierStandard	113
102101606050169	16	1,770	Bright	zZ	179	SupplierStandard	113
102101604250169	16	1,770	Galvanized	sZ	179	SupplierStandard	113
102101606250169	16	1,770	Galvanized	zZ	179	SupplierStandard	113

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102101604070169	16	1,960	Bright	sZ	199	SupplierStandard	113
102101606070169	16	1,960	Bright	zZ	199	SupplierStandard	113
102101604270169	16	1,960	Galvanized	sZ	199	SupplierStandard	113
102101606270169	16	1,960	Galvanized	zZ	199	SupplierStandard	113
102101604100169	16	2,160	Bright	sZ	210	SupplierStandard	113
102101606100169	16	2,160	Bright	zZ	210	SupplierStandard	113
102101604300169	16	2,160	Galvanized	sZ	210	SupplierStandard	113
102101606300169	16	2,160	Galvanized	zZ	210	SupplierStandard	113
102101704050169	17	1,770	Bright	sZ	203	SupplierStandard	128
102101706050169	17	1,770	Bright	zZ	203	SupplierStandard	128
102101704250169	17	1,770	Galvanized	sZ	203	SupplierStandard	128
102101706250169	17	1,770	Galvanized	zZ	203	SupplierStandard	128
102101704070169	17	1,960	Bright	sZ	226	SupplierStandard	128
102101706070169	17	1,960	Bright	zZ	226	SupplierStandard	128
102101704270169	17	1,960	Galvanized	sZ	226	SupplierStandard	128
102101706270169	17	1,960	Galvanized	zZ	226	SupplierStandard	128
102101704100169	17	2,160	Bright	sZ	238	SupplierStandard	128
102101706100169	17	2,160	Bright	zZ	238	SupplierStandard	128
102101704300169	17	2,160	Galvanized	sZ	238	SupplierStandard	128
102101706300169	17	2,160	Galvanized	zZ	238	SupplierStandard	128
102101804050169	18	1,770	Bright	sZ	227	SupplierStandard	143
102101806050169	18	1,770	Bright	zZ	227	SupplierStandard	143
102101804250169	18	1,770	Galvanized	sZ	227	SupplierStandard	143
102101806250169	18	1,770	Galvanized	zZ	227	SupplierStandard	143
102101804070169	18	1,960	Bright	sZ	252	SupplierStandard	143
102101806070169	18	1,960	Bright	zZ	252	SupplierStandard	143
102101804270169	18	1,960	Galvanized	sZ	252	SupplierStandard	143
102101806270169	18	1,960	Galvanized	zZ	252	SupplierStandard	143
102101804100169	18	2,160	Bright	sZ	266	SupplierStandard	143
102101806100169	18	2,160	Bright	zZ	266	SupplierStandard	143
102101804300169	18	2,160	Galvanized	sZ	266	SupplierStandard	143

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102101806300169	18	2,160	Galvanized	zZ	266	SupplierStandard	143
102101904050169	19	1,770	Bright	sZ	255	SupplierStandard	160
102101906050169	19	1,770	Bright	zZ	255	SupplierStandard	160
102101904250169	19	1,770	Galvanized	sZ	255	SupplierStandard	160
102101906250169	19	1,770	Galvanized	zZ	255	SupplierStandard	160
102101904070169	19	1,960	Bright	sZ	283	SupplierStandard	160
102101906070169	19	1,960	Bright	zZ	283	SupplierStandard	160
102101904270169	19	1,960	Galvanized	sZ	283	SupplierStandard	160
102101906270169	19	1,960	Galvanized	zZ	283	SupplierStandard	160
102101904100169	19	2,160	Bright	sZ	300	SupplierStandard	160
102101906100169	19	2,160	Bright	zZ	300	SupplierStandard	160
102101904300169	19	2,160	Galvanized	sZ	300	SupplierStandard	160
102101906300169	19	2,160	Galvanized	zZ	300	SupplierStandard	160
102102004050169	20	1,770	Bright	sZ	282	SupplierStandard	177
102102006050169	20	1,770	Bright	zZ	282	SupplierStandard	177
102102004250169	20	1,770	Galvanized	sZ	282	SupplierStandard	177
102102006250169	20	1,770	Galvanized	zZ	282	SupplierStandard	177
102102004070169	20	1,960	Bright	sZ	313	SupplierStandard	177
102102006070169	20	1,960	Bright	zZ	313	SupplierStandard	177
102102004270169	20	1,960	Galvanized	sZ	313	SupplierStandard	177
102102006270169	20	1,960	Galvanized	zZ	313	SupplierStandard	177
102102004100169	20	2,160	Bright	sZ	332	SupplierStandard	177
102102006100169	20	2,160	Bright	zZ	332	SupplierStandard	177
102102004300169	20	2,160	Galvanized	sZ	332	SupplierStandard	177
102102006300169	20	2,160	Galvanized	zZ	332	SupplierStandard	177
102102104050169	21	1,770	Bright	sZ	311	SupplierStandard	196
102102106050169	21	1,770	Bright	zZ	311	SupplierStandard	196
102102104250169	21	1,770	Galvanized	sZ	311	SupplierStandard	196
102102106250169	21	1,770	Galvanized	zZ	311	SupplierStandard	196
102102104070169	21	1,960	Bright	sZ	346	SupplierStandard	196
102102106070169	21	1,960	Bright	zZ	346	SupplierStandard	196

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102102104270169	21	1,960	Galvanized	sZ	346	SupplierStandard	196
102102106270169	21	1,960	Galvanized	zZ	346	SupplierStandard	196
102102104100169	21	2,160	Bright	sZ	366	SupplierStandard	196
102102106100169	21	2,160	Bright	zZ	366	SupplierStandard	196
102102104300169	21	2,160	Galvanized	sZ	366	SupplierStandard	196
102102106300169	21	2,160	Galvanized	zZ	366	SupplierStandard	196
102102204050169	22	1,770	Bright	sZ	340	SupplierStandard	214
102102206050169	22	1,770	Bright	zZ	340	SupplierStandard	214
102102204250169	22	1,770	Galvanized	sZ	340	SupplierStandard	214
102102206250169	22	1,770	Galvanized	zZ	340	SupplierStandard	214
102102204070169	22	1,960	Bright	sZ	379	SupplierStandard	214
102102206070169	22	1,960	Bright	zZ	379	SupplierStandard	214
102102204270169	22	1,960	Galvanized	sZ	379	SupplierStandard	214
102102206270169	22	1,960	Galvanized	zZ	379	SupplierStandard	214
102102204100169	22	2,160	Bright	sZ	400	SupplierStandard	214
102102206100169	22	2,160	Bright	zZ	400	SupplierStandard	214
102102204300169	22	2,160	Galvanized	sZ	400	SupplierStandard	214
102102206300169	22	2,160	Galvanized	zZ	400	SupplierStandard	214
102102304050169	23	1,770	Bright	sZ	372	SupplierStandard	234
102102306050169	23	1,770	Bright	zZ	372	SupplierStandard	234
102102304250169	23	1,770	Galvanized	sZ	372	SupplierStandard	234
102102306250169	23	1,770	Galvanized	zZ	372	SupplierStandard	234
102102304070169	23	1,960	Bright	sZ	413	SupplierStandard	234
102102306070169	23	1,960	Bright	zZ	413	SupplierStandard	234
102102304270169	23	1,960	Galvanized	sZ	413	SupplierStandard	234
102102306270169	23	1,960	Galvanized	zZ	413	SupplierStandard	234
102102304100169	23	2,160	Bright	sZ	437	SupplierStandard	234
102102306100169	23	2,160	Bright	zZ	437	SupplierStandard	234
102102304300169	23	2,160	Galvanized	sZ	437	SupplierStandard	234
102102306300169	23	2,160	Galvanized	zZ	437	SupplierStandard	234
102102404050169	24	1,770	Bright	sZ	405	SupplierStandard	254

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102102406050169	24	1,770	Bright	zZ	405	SupplierStandard	254
102102404250169	24	1,770	Galvanized	sZ	405	SupplierStandard	254
102102406250169	24	1,770	Galvanized	zZ	405	SupplierStandard	254
102102404070169	24	1,960	Bright	sZ	449	SupplierStandard	254
102102406070169	24	1,960	Bright	zZ	449	SupplierStandard	254
102102404270169	24	1,960	Galvanized	sZ	449	SupplierStandard	254
102102406270169	24	1,960	Galvanized	zZ	449	SupplierStandard	254
102102404100169	24	2,160	Bright	sZ	475	SupplierStandard	254
102102406100169	24	2,160	Bright	zZ	475	SupplierStandard	254
102102404300169	24	2,160	Galvanized	sZ	475	SupplierStandard	254
102102406300169	24	2,160	Galvanized	zZ	475	SupplierStandard	254
102102504050169	25	1,770	Bright	sZ	440	SupplierStandard	277
102102506050169	25	1,770	Bright	zZ	440	SupplierStandard	277
102102504250169	25	1,770	Galvanized	sZ	440	SupplierStandard	277
102102506250169	25	1,770	Galvanized	zZ	440	SupplierStandard	277
102102504070169	25	1,960	Bright	sZ	490	SupplierStandard	277
102102506070169	25	1,960	Bright	zZ	490	SupplierStandard	277
102102504270169	25	1,960	Galvanized	sZ	490	SupplierStandard	277
102102506270169	25	1,960	Galvanized	zZ	490	SupplierStandard	277
102102504100169	25	2,160	Bright	sZ	518	SupplierStandard	277
102102506100169	25	2,160	Bright	zZ	518	SupplierStandard	277
102102504300169	25	2,160	Galvanized	sZ	518	SupplierStandard	277
102102506300169	25	2,160	Galvanized	zZ	518	SupplierStandard	277
102102604050169	26	1,770	Bright	sZ	474	SupplierStandard	298
102102606050169	26	1,770	Bright	zZ	474	SupplierStandard	298
102102604250169	26	1,770	Galvanized	sZ	474	SupplierStandard	298
102102606250169	26	1,770	Galvanized	zZ	474	SupplierStandard	298
102102604070169	26	1,960	Bright	sZ	527	SupplierStandard	298
102102606070169	26	1,960	Bright	zZ	527	SupplierStandard	298
102102604270169	26	1,960	Galvanized	sZ	527	SupplierStandard	298
102102606270169	26	1,960	Galvanized	zZ	527	SupplierStandard	298

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102102604100169	26	2,160	Bright	sZ	558	SupplierStandard	298
102102606100169	26	2,160	Bright	zZ	558	SupplierStandard	298
102102604300169	26	2,160	Galvanized	sZ	558	SupplierStandard	298
102102606300169	26	2,160	Galvanized	zZ	558	SupplierStandard	298
102102704050169	27	1,770	Bright	sZ	515	SupplierStandard	354
102102706050169	27	1,770	Bright	zZ	515	SupplierStandard	354
102102704250169	27	1,770	Galvanized	sZ	515	SupplierStandard	354
102102706250169	27	1,770	Galvanized	zZ	515	SupplierStandard	354
102102704070169	27	1,960	Bright	sZ	572	SupplierStandard	354
102102706070169	27	1,960	Bright	zZ	572	SupplierStandard	354
102102704270169	27	1,960	Galvanized	sZ	572	SupplierStandard	354
102102706270169	27	1,960	Galvanized	zZ	572	SupplierStandard	354
102102704100169	27	2,160	Bright	sZ	605	SupplierStandard	354
102102706100169	27	2,160	Bright	zZ	605	SupplierStandard	354
102102704300169	27	2,160	Galvanized	sZ	605	SupplierStandard	354
102102706300169	27	2,160	Galvanized	zZ	605	SupplierStandard	354
102102804050169	28	1,770	Bright	sZ	553	SupplierStandard	347
102102806050169	28	1,770	Bright	zZ	553	SupplierStandard	347
102102804250169	28	1,770	Galvanized	sZ	553	SupplierStandard	347
102102806250169	28	1,770	Galvanized	zZ	553	SupplierStandard	347
102102804070169	28	1,960	Bright	sZ	614	SupplierStandard	347
102102806070169	28	1,960	Bright	zZ	614	SupplierStandard	347
102102804270169	28	1,960	Galvanized	sZ	614	SupplierStandard	347
102102806270169	28	1,960	Galvanized	zZ	614	SupplierStandard	347
102102804100169	28	2,160	Bright	sZ	649	SupplierStandard	347
102102806100169	28	2,160	Bright	zZ	649	SupplierStandard	347
102102804300169	28	2,160	Galvanized	sZ	649	SupplierStandard	347
102102806300169	28	2,160	Galvanized	zZ	649	SupplierStandard	347
102102904050169	29	1,770	Bright	sZ	593	SupplierStandard	373
102102906050169	29	1,770	Bright	zZ	593	SupplierStandard	373
102102904250169	29	1,770	Galvanized	sZ	593	SupplierStandard	373

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102102906250169	29	1,770	Galvanized	zZ	593	SupplierStandard	373
102102904070169	29	1,960	Bright	sZ	659	SupplierStandard	373
102102906070169	29	1,960	Bright	zZ	659	SupplierStandard	373
102102904270169	29	1,960	Galvanized	sZ	659	SupplierStandard	373
102102906270169	29	1,960	Galvanized	zZ	659	SupplierStandard	373
102102904100169	29	2,160	Bright	sZ	697	SupplierStandard	373
102102906100169	29	2,160	Bright	zZ	697	SupplierStandard	373
102102904300169	29	2,160	Galvanized	sZ	697	SupplierStandard	373
102102906300169	29	2,160	Galvanized	zZ	697	SupplierStandard	373
102103004050169	30	1,770	Bright	sZ	637	SupplierStandard	400
102103006050169	30	1,770	Bright	zZ	637	SupplierStandard	400
102103004250169	30	1,770	Galvanized	sZ	637	SupplierStandard	400
102103006250169	30	1,770	Galvanized	zZ	637	SupplierStandard	400
102103004070169	30	1,960	Bright	sZ	708	SupplierStandard	400
102103006070169	30	1,960	Bright	zZ	708	SupplierStandard	400
102103004270169	30	1,960	Galvanized	sZ	708	SupplierStandard	400
102103006270169	30	1,960	Galvanized	zZ	708	SupplierStandard	400
102103004100169	30	2,160	Bright	sZ	749	SupplierStandard	400
102103006100169	30	2,160	Bright	zZ	749	SupplierStandard	400
102103004300169	30	2,160	Galvanized	sZ	749	SupplierStandard	400
102103006300169	30	2,160	Galvanized	zZ	749	SupplierStandard	400
102103104050169	31	1,770	Bright	sZ	678	SupplierStandard	426
102103106050169	31	1,770	Bright	zZ	678	SupplierStandard	426
102103104250169	31	1,770	Galvanized	sZ	678	SupplierStandard	426
102103106250169	31	1,770	Galvanized	zZ	678	SupplierStandard	426
102103104070169	31	1,960	Bright	sZ	753	SupplierStandard	426
102103106070169	31	1,960	Bright	zZ	753	SupplierStandard	426
102103104270169	31	1,960	Galvanized	sZ	753	SupplierStandard	426
102103106270169	31	1,960	Galvanized	zZ	753	SupplierStandard	426
102103104100169	31	2,160	Bright	sZ	797	SupplierStandard	426
102103106100169	31	2,160	Bright	zZ	797	SupplierStandard	426

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102103104300169	31	2,160	Galvanized	sZ	797	SupplierStandard	426
102103106300169	31	2,160	Galvanized	zZ	797	SupplierStandard	426
102103204050169	32	1,770	Bright	sZ	723	SupplierStandard	455
102103206050169	32	1,770	Bright	zZ	723	SupplierStandard	455
102103204250169	32	1,770	Galvanized	sZ	723	SupplierStandard	455
102103206250169	32	1,770	Galvanized	zZ	723	SupplierStandard	455
102103204070169	32	1,960	Bright	sZ	804	SupplierStandard	455
102103206070169	32	1,960	Bright	zZ	804	SupplierStandard	455
102103204270169	32	1,960	Galvanized	sZ	804	SupplierStandard	455
102103206270169	32	1,960	Galvanized	zZ	804	SupplierStandard	455
102103204100169	32	2,160	Bright	sZ	851	SupplierStandard	455
102103206100169	32	2,160	Bright	zZ	851	SupplierStandard	455
102103204300169	32	2,160	Galvanized	sZ	851	SupplierStandard	455
102103206300169	32	2,160	Galvanized	zZ	851	SupplierStandard	455
102103304050169	33	1,770	Bright	sZ	766	SupplierStandard	481
102103306050169	33	1,770	Bright	zZ	766	SupplierStandard	481
102103304250169	33	1,770	Galvanized	sZ	766	SupplierStandard	481
102103306250169	33	1,770	Galvanized	zZ	766	SupplierStandard	481
102103304070169	33	1,960	Bright	sZ	852	SupplierStandard	481
102103306070169	33	1,960	Bright	zZ	852	SupplierStandard	481
102103304270169	33	1,960	Galvanized	sZ	852	SupplierStandard	481
102103306270169	33	1,960	Galvanized	zZ	852	SupplierStandard	481
102103304100169	33	2,160	Bright	sZ	901	SupplierStandard	481
102103306100169	33	2,160	Bright	zZ	901	SupplierStandard	481
102103304300169	33	2,160	Galvanized	sZ	901	SupplierStandard	481
102103306300169	33	2,160	Galvanized	zZ	901	SupplierStandard	481
102103404050169	34	1,770	Bright	sZ	814	SupplierStandard	511
102103406050169	34	1,770	Bright	zZ	814	SupplierStandard	511
102103404250169	34	1,770	Galvanized	sZ	814	SupplierStandard	511
102103406250169	34	1,770	Galvanized	zZ	814	SupplierStandard	511
102103404070169	34	1,960	Bright	sZ	904	SupplierStandard	511

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102103406070169	34	1,960	Bright	zZ	904	SupplierStandard	511
102103404270169	34	1,960	Galvanized	sZ	904	SupplierStandard	511
102103406270169	34	1,960	Galvanized	zZ	904	SupplierStandard	511
102103404100169	34	2,160	Bright	sZ	956	SupplierStandard	511
102103406100169	34	2,160	Bright	zZ	956	SupplierStandard	511
102103404300169	34	2,160	Galvanized	sZ	956	SupplierStandard	511
102103406300169	34	2,160	Galvanized	zZ	956	SupplierStandard	511
102103504050169	35	1,770	Bright	sZ	858	SupplierStandard	539
102103506050169	35	1,770	Bright	zZ	858	SupplierStandard	539
102103504250169	35	1,770	Galvanized	sZ	858	SupplierStandard	539
102103506250169	35	1,770	Galvanized	zZ	858	SupplierStandard	539
102103504070169	35	1,960	Bright	sZ	954	SupplierStandard	539
102103506070169	35	1,960	Bright	zZ	954	SupplierStandard	539
102103504270169	35	1,960	Galvanized	sZ	954	SupplierStandard	539
102103506270169	35	1,960	Galvanized	zZ	954	SupplierStandard	539
102103504100169	35	2,160	Bright	sZ	1,009	SupplierStandard	539
102103506100169	35	2,160	Bright	zZ	1,009	SupplierStandard	539
102103504300169	35	2,160	Galvanized	sZ	1,009	SupplierStandard	539
102103506300169	35	2,160	Galvanized	zZ	1,009	SupplierStandard	539
102103604050169	36	1,770	Bright	sZ	914	SupplierStandard	574
102103606050169	36	1,770	Bright	zZ	914	SupplierStandard	574
102103604250169	36	1,770	Galvanized	sZ	914	SupplierStandard	574
102103606250169	36	1,770	Galvanized	zZ	914	SupplierStandard	574
102103604070169	36	1,960	Bright	sZ	1,016	SupplierStandard	574
102103606070169	36	1,960	Bright	zZ	1,016	SupplierStandard	574
102103604270169	36	1,960	Galvanized	sZ	1,016	SupplierStandard	574
102103606270169	36	1,960	Galvanized	zZ	1,016	SupplierStandard	574
102103604100169	36	2,160	Bright	sZ	1,074	SupplierStandard	574
102103606100169	36	2,160	Bright	zZ	1,074	SupplierStandard	574
102103604300169	36	2,160	Galvanized	sZ	1,074	SupplierStandard	574
102103606300169	36	2,160	Galvanized	zZ	1,074	SupplierStandard	574

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102103704050169	37	1,770	Bright	sZ	961	SupplierStandard	604
102103706050169	37	1,770	Bright	zZ	961	SupplierStandard	604
102103704250169	37	1,770	Galvanized	sZ	961	SupplierStandard	604
102103706250169	37	1,770	Galvanized	zZ	961	SupplierStandard	604
102103704070169	37	1,960	Bright	sZ	1,068	SupplierStandard	604
102103706070169	37	1,960	Bright	zZ	1,068	SupplierStandard	604
102103704270169	37	1,960	Galvanized	sZ	1,068	SupplierStandard	604
102103706270169	37	1,960	Galvanized	zZ	1,068	SupplierStandard	604
102103704100169	37	2,160	Bright	sZ	1,130	SupplierStandard	604
102103706100169	37	2,160	Bright	zZ	1,130	SupplierStandard	604
102103704300169	37	2,160	Galvanized	sZ	1,130	SupplierStandard	604
102103706300169	37	2,160	Galvanized	zZ	1,130	SupplierStandard	604
102103804050169	38	1,770	Bright	sZ	1,015	SupplierStandard	638
102103806050169	38	1,770	Bright	zZ	1,015	SupplierStandard	638
102103804250169	38	1,770	Galvanized	sZ	1,015	SupplierStandard	638
102103806250169	38	1,770	Galvanized	zZ	1,015	SupplierStandard	638
102103804070169	38	1,960	Bright	sZ	1,129	SupplierStandard	638
102103806070169	38	1,960	Bright	zZ	1,129	SupplierStandard	638
102103804270169	38	1,960	Galvanized	sZ	1,129	SupplierStandard	638
102103806270169	38	1,960	Galvanized	zZ	1,129	SupplierStandard	638
102103804100169	38	2,160	Bright	sZ	1,193	SupplierStandard	638
102103806100169	38	2,160	Bright	zZ	1,193	SupplierStandard	638
102103804300169	38	2,160	Galvanized	sZ	1,193	SupplierStandard	638
102103806300169	38	2,160	Galvanized	zZ	1,193	SupplierStandard	638
102103904050169	39	1,770	Bright	sZ	1,067	SupplierStandard	671
102103906050169	39	1,770	Bright	zZ	1,067	SupplierStandard	671
102103904250169	39	1,770	Galvanized	sZ	1,067	SupplierStandard	671
102103906250169	39	1,770	Galvanized	zZ	1,067	SupplierStandard	671
102103904070169	39	1,960	Bright	sZ	1,186	SupplierStandard	671
102103906070169	39	1,960	Bright	zZ	1,186	SupplierStandard	671
102103904270169	39	1,960	Galvanized	sZ	1,186	SupplierStandard	671

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102103906270169	39	1,960	Galvanized	zZ	1,186	SupplierStandard	671
102103904100169	39	2,160	Bright	sZ	1,255	SupplierStandard	671
102103906100169	39	2,160	Bright	zZ	1,255	SupplierStandard	671
102103904300169	39	2,160	Galvanized	sZ	1,255	SupplierStandard	671
102103906300169	39	2,160	Galvanized	zZ	1,255	SupplierStandard	671
102104004050169	40	1,770	Bright	sZ	1,125	SupplierStandard	707
102104006050169	40	1,770	Bright	zZ	1,125	SupplierStandard	707
102104004250169	40	1,770	Galvanized	sZ	1,125	SupplierStandard	707
102104006250169	40	1,770	Galvanized	zZ	1,125	SupplierStandard	707
102104004070169	40	1,960	Bright	sZ	1,250	SupplierStandard	707
102104006070169	40	1,960	Bright	zZ	1,250	SupplierStandard	707
102104004270169	40	1,960	Galvanized	sZ	1,250	SupplierStandard	707
102104006270169	40	1,960	Galvanized	zZ	1,250	SupplierStandard	707
102104004100169	40	2,160	Bright	sZ	1,323	SupplierStandard	707
102104006100169	40	2,160	Bright	zZ	1,323	SupplierStandard	707
102104004300169	40	2,160	Galvanized	sZ	1,323	SupplierStandard	707
102104006300169	40	2,160	Galvanized	zZ	1,323	SupplierStandard	707
102104104050169	41	1,770	Bright	sZ	1,183	SupplierStandard	743
102104106050169	41	1,770	Bright	zZ	1,183	SupplierStandard	743
102104104250169	41	1,770	Galvanized	sZ	1,183	SupplierStandard	743
102104106250169	41	1,770	Galvanized	zZ	1,183	SupplierStandard	743
102104104070169	41	1,960	Bright	sZ	1,315	SupplierStandard	743
102104106070169	41	1,960	Bright	zZ	1,315	SupplierStandard	743
102104104270169	41	1,960	Galvanized	sZ	1,315	SupplierStandard	743
102104106270169	41	1,960	Galvanized	zZ	1,315	SupplierStandard	743
102104104100169	41	2,160	Bright	sZ	1,391	SupplierStandard	743
102104106100169	41	2,160	Bright	zZ	1,391	SupplierStandard	743
102104104300169	41	2,160	Galvanized	sZ	1,391	SupplierStandard	743
102104106300169	41	2,160	Galvanized	zZ	1,391	SupplierStandard	743
102104204050169	42	1,770	Bright	sZ	1,240	SupplierStandard	779
102104206050169	42	1,770	Bright	zZ	1,240	SupplierStandard	779

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102104204250169	42	1,770	Galvanized	sZ	1,240	SupplierStandard	779
102104206250169	42	1,770	Galvanized	zZ	1,240	SupplierStandard	779
102104204070169	42	1,960	Bright	sZ	1,379	SupplierStandard	779
102104206070169	42	1,960	Bright	zZ	1,379	SupplierStandard	779
102104204270169	42	1,960	Galvanized	sZ	1,379	SupplierStandard	779
102104206270169	42	1,960	Galvanized	zZ	1,379	SupplierStandard	779
102104204100169	42	2,160	Bright	sZ	1,458	SupplierStandard	779
102104206100169	42	2,160	Bright	zZ	1,458	SupplierStandard	779
102104204300169	42	2,160	Galvanized	sZ	1,458	SupplierStandard	779
102104206300169	42	2,160	Galvanized	zZ	1,458	SupplierStandard	779
102104304050169	43	1,770	Bright	sZ	1,297	SupplierStandard	815
102104306050169	43	1,770	Bright	zZ	1,297	SupplierStandard	815
102104304250169	43	1,770	Galvanized	sZ	1,297	SupplierStandard	815
102104306250169	43	1,770	Galvanized	zZ	1,297	SupplierStandard	815
102104304070169	43	1,960	Bright	sZ	1,441	SupplierStandard	815
102104306070169	43	1,960	Bright	zZ	1,441	SupplierStandard	815
102104304270169	43	1,960	Galvanized	sZ	1,441	SupplierStandard	815
102104306270169	43	1,960	Galvanized	zZ	1,441	SupplierStandard	815
102104304100169	43	2,160	Bright	sZ	1,524	SupplierStandard	815
102104306100169	43	2,160	Bright	zZ	1,524	SupplierStandard	815
102104304300169	43	2,160	Galvanized	sZ	1,524	SupplierStandard	815
102104306300169	43	2,160	Galvanized	zZ	1,524	SupplierStandard	815
102104404050169	44	1,770	Bright	sZ	1,361	SupplierStandard	855
102104406050169	44	1,770	Bright	zZ	1,361	SupplierStandard	855
102104404250169	44	1,770	Galvanized	sZ	1,361	SupplierStandard	855
102104406250169	44	1,770	Galvanized	zZ	1,361	SupplierStandard	855
102104404070169	44	1,960	Bright	sZ	1,513	SupplierStandard	855
102104406070169	44	1,960	Bright	zZ	1,513	SupplierStandard	855
102104404270169	44	1,960	Galvanized	sZ	1,513	SupplierStandard	855
102104406270169	44	1,960	Galvanized	zZ	1,513	SupplierStandard	855
102104404100169	44	2,160	Bright	sZ	1,600	SupplierStandard	855

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B45 (D 1315 C) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
102104406100169	44	2,160	Bright	zZ	1,600	SupplierStandard	855
102104404300169	44	2,160	Galvanized	sZ	1,600	SupplierStandard	855
102104406300169	44	2,160	Galvanized	zZ	1,600	SupplierStandard	855
102104504050169	45	1,770	Bright	sZ	1,422	SupplierStandard	893
102104506050169	45	1,770	Bright	zZ	1,422	SupplierStandard	893
102104504250169	45	1,770	Galvanized	sZ	1,422	SupplierStandard	893
102104506250169	45	1,770	Galvanized	zZ	1,422	SupplierStandard	893
102104504070169	45	1,960	Bright	sZ	1,580	SupplierStandard	893
102104506070169	45	1,960	Bright	zZ	1,580	SupplierStandard	893
102104504270169	45	1,960	Galvanized	sZ	1,580	SupplierStandard	893
102104506270169	45	1,960	Galvanized	zZ	1,580	SupplierStandard	893
102104504100169	45	2,160	Bright	sZ	1,671	SupplierStandard	893
102104506100169	45	2,160	Bright	zZ	1,671	SupplierStandard	893
102104504300169	45	2,160	Galvanized	sZ	1,671	SupplierStandard	893
102104506300169	45	2,160	Galvanized	zZ	1,671	SupplierStandard	893

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved