


Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Product information

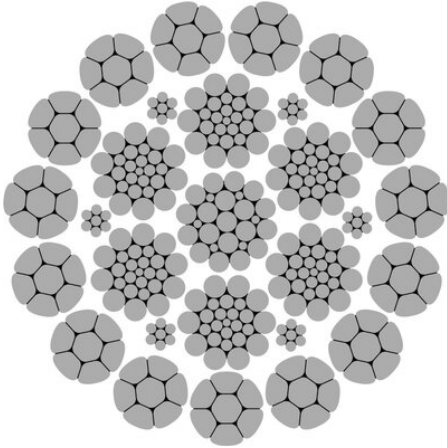

Diepa B55 is a rotation-resistant wire rope with compacted outer strands and with a high breaking force.

Applications: Tower cranes, hoisting rope for mobile cranes, telescopic cranes, crawlers, off-shore cranes, EOTs with a single fall, ship deck cranes, etc.
For multi-layer coiling on the drum.

Lay: Lang lay.

Total numbers of wires: \varnothing 6-10mm - **238**, 11-49mm - **328**, 50-99mm - **549**, 100-120mm **1053**.

ISO 4309 Rope Category No: 4-49mm **RCN.23-2**, 50-99mm **RCN.27**, 100-120mm **RCN.31**

Optional: B50 - Ordinary Lay, B58 - Lang Lay with plastic insert, B53 - Ordinary Lay with plastic insert.

B55 from 72mm tensile strength 2160 N/mm² on request

[... Read more](#)

Marking: According to standard

Finish: Galvanized or bright.

Standard: EN 12385-4

Fill factor: 0.7145

RCN: 23-2

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104100605050089	6	1,770	Bright	sS	29.9	-	SupplierStandard	17
104100606050089	6	1,770	Bright	zZ	29.9	-	SupplierStandard	17
104100605250089	6	1,770	Galvanized	sS	29.9	-	SupplierStandard	17
104100606250089	6	1,770	Galvanized	zZ	29.9	-	SupplierStandard	17
104100605070089	6	1,960	Bright	sS	33.1	-	SupplierStandard	17
104100606070089	6	1,960	Bright	zZ	33.1	-	SupplierStandard	17
104100605270089	6	1,960	Galvanized	sS	33.1	-	SupplierStandard	17
104100606270089	6	1,960	Galvanized	zZ	33.1	-	SupplierStandard	17
104100605100089	6	2,160	Bright	sS	35.6	-	SupplierStandard	17
104100606100089	6	2,160	Bright	zZ	35.6	-	SupplierStandard	17
104100605300089	6	2,160	Galvanized	sS	35.6	-	SupplierStandard	17
104100606300089	6	2,160	Galvanized	zZ	35.6	-	SupplierStandard	17
104100805050089	8	1,770	Bright	sS	53.1	-	SupplierStandard	31
104100806050089	8	1,770	Bright	zZ	53.1	-	SupplierStandard	31
104100805250089	8	1,770	Galvanized	sS	53.1	-	SupplierStandard	31
104100806250089	8	1,770	Galvanized	zZ	53.1	-	SupplierStandard	31
104100805070089	8	1,960	Bright	sS	58.8	-	SupplierStandard	31
104100806070089	8	1,960	Bright	zZ	58.8	-	SupplierStandard	31
104100805270089	8	1,960	Galvanized	sS	58.8	-	SupplierStandard	31
104100806270089	8	1,960	Galvanized	zZ	58.8	-	SupplierStandard	31
104100805100089	8	2,160	Bright	sS	63.2	-	SupplierStandard	31
104100806100089	8	2,160	Bright	zZ	63.2	-	SupplierStandard	31
104100805300089	8	2,160	Galvanized	sS	63.2	-	SupplierStandard	31
104100806300089	8	2,160	Galvanized	zZ	63.2	-	SupplierStandard	31
104101005050089	10	1,770	Bright	sS	82.4	-	SupplierStandard	49
104101006050089	10	1,770	Bright	zZ	82.4	-	SupplierStandard	49
104101005250089	10	1,770	Galvanized	sS	82.4	-	SupplierStandard	49
104101006250089	10	1,770	Galvanized	zZ	82.4	-	SupplierStandard	49
104101005070089	10	1,960	Bright	sS	91.7	-	SupplierStandard	49
104101006070089	10	1,960	Bright	zZ	91.7	-	SupplierStandard	49
104101005270089	10	1,960	Galvanized	sS	91.7	-	SupplierStandard	49

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104101006270089	10	1,960	Galvanized	zZ	91.7	-	SupplierStandard	49
104101005100089	10	2,160	Bright	sS	98.6	-	SupplierStandard	49
104101006100089	10	2,160	Bright	zZ	98.6	-	SupplierStandard	49
104101005300089	10	2,160	Galvanized	sS	98.6	-	SupplierStandard	49
104101006300089	10	2,160	Galvanized	zZ	98.6	-	SupplierStandard	49
104101105050089	11	1,770	Bright	sS	101	-	SupplierStandard	59
104101106050089	11	1,770	Bright	zZ	101	-	SupplierStandard	59
104101105250089	11	1,770	Galvanized	sS	101	-	SupplierStandard	59
104101106250089	11	1,770	Galvanized	zZ	101	-	SupplierStandard	59
104101105070089	11	1,960	Bright	sS	112	-	SupplierStandard	59
104101106070089	11	1,960	Bright	zZ	112	-	SupplierStandard	59
104101105270089	11	1,960	Galvanized	sS	112	-	SupplierStandard	59
104101106270089	11	1,960	Galvanized	zZ	112	-	SupplierStandard	59
104101105100089	11	2,160	Bright	sS	120	-	SupplierStandard	59
104101106100089	11	2,160	Bright	zZ	120	-	SupplierStandard	59
104101105300089	11	2,160	Galvanized	sS	120	-	SupplierStandard	59
104101106300089	11	2,160	Galvanized	zZ	120	-	SupplierStandard	59
104101205050089	12	1,770	Bright	sS	119	-	SupplierStandard	70
104101206050089	12	1,770	Bright	zZ	119	-	SupplierStandard	70
104101205250089	12	1,770	Galvanized	sS	119	-	SupplierStandard	70
104101206250089	12	1,770	Galvanized	zZ	119	-	SupplierStandard	70
104101205070089	12	1,960	Bright	sS	132	-	SupplierStandard	70
104101206070089	12	1,960	Bright	zZ	132	-	SupplierStandard	70
104101205270089	12	1,960	Galvanized	sS	132	-	SupplierStandard	70
104101206270089	12	1,960	Galvanized	zZ	132	-	SupplierStandard	70
104101205100089	12	2,160	Bright	sS	142	-	SupplierStandard	70
104101206100089	12	2,160	Bright	zZ	142	-	SupplierStandard	70
104101205300089	12	2,160	Galvanized	sS	142	-	SupplierStandard	70
104101206300089	12	2,160	Galvanized	zZ	142	-	SupplierStandard	70
104101305050089	13	1,770	Bright	sS	141	-	SupplierStandard	83
104101306050089	13	1,770	Bright	zZ	141	-	SupplierStandard	83

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104101305250089	13	1,770	Galvanized	sS	141	-	SupplierStandard	83
104101306250089	13	1,770	Galvanized	zZ	141	-	SupplierStandard	83
104101305070089	13	1,960	Bright	sS	156	-	SupplierStandard	83
104101306070089	13	1,960	Bright	zZ	156	-	SupplierStandard	83
104101305270089	13	1,960	Galvanized	sS	156	-	SupplierStandard	83
104101306270089	13	1,960	Galvanized	zZ	156	-	SupplierStandard	83
104101305100089	13	2,160	Bright	sS	168	-	SupplierStandard	83
104101306100089	13	2,160	Bright	zZ	168	-	SupplierStandard	83
104101305300089	13	2,160	Galvanized	sS	168	-	SupplierStandard	83
104101306300089	13	2,160	Galvanized	zZ	168	-	SupplierStandard	83
104101405050089	14	1,770	Bright	sS	162	-	SupplierStandard	95
104101406050089	14	1,770	Bright	zZ	162	-	SupplierStandard	95
104101405250089	14	1,770	Galvanized	sS	162	-	SupplierStandard	95
104101406250089	14	1,770	Galvanized	zZ	162	-	SupplierStandard	95
104101405070089	14	1,960	Bright	sS	181	-	SupplierStandard	95
104101406070089	14	1,960	Bright	zZ	181	-	SupplierStandard	95
104101405270089	14	1,960	Galvanized	sS	181	-	SupplierStandard	95
104101406270089	14	1,960	Galvanized	zZ	181	-	SupplierStandard	95
104101405100089	14	2,160	Bright	sS	194	-	SupplierStandard	95
104101406100089	14	2,160	Bright	zZ	194	-	SupplierStandard	95
104101405300089	14	2,160	Galvanized	sS	194	-	SupplierStandard	95
104101406300089	14	2,160	Galvanized	zZ	194	-	SupplierStandard	95
104101505050089	15	1,770	Bright	sS	186	-	SupplierStandard	109
104101506050089	15	1,770	Bright	zZ	186	-	SupplierStandard	109
104101505250089	15	1,770	Galvanized	sS	186	-	SupplierStandard	109
104101506250089	15	1,770	Galvanized	zZ	186	-	SupplierStandard	109
104101505070089	15	1,960	Bright	sS	207	-	SupplierStandard	109
104101506070089	15	1,960	Bright	zZ	207	-	SupplierStandard	109
104101505270089	15	1,960	Galvanized	sS	207	-	SupplierStandard	109
104101506270089	15	1,960	Galvanized	zZ	207	-	SupplierStandard	109
104101505100089	15	2,160	Bright	sS	222	-	SupplierStandard	109

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104101506100089	15	2,160	Bright	zZ	222	-	SupplierStandard	109
104101505300089	15	2,160	Galvanized	sS	222	-	SupplierStandard	109
104101506300089	15	2,160	Galvanized	zZ	222	-	SupplierStandard	109
104101605050089	16	1,770	Bright	sS	214	-	SupplierStandard	126
104101606050089	16	1,770	Bright	zZ	214	-	SupplierStandard	126
104101605250089	16	1,770	Galvanized	sS	214	-	SupplierStandard	126
104101606250089	16	1,770	Galvanized	zZ	214	-	SupplierStandard	126
104101605070089	16	1,960	Bright	sS	238	-	SupplierStandard	126
104101606070089	16	1,960	Bright	zZ	238	-	SupplierStandard	126
104101605270089	16	1,960	Galvanized	sS	238	-	SupplierStandard	126
104101606270089	16	1,960	Galvanized	zZ	238	-	SupplierStandard	126
104101605100089	16	2,160	Bright	sS	256	-	SupplierStandard	126
104101606100089	16	2,160	Bright	zZ	256	-	SupplierStandard	126
104101605300089	16	2,160	Galvanized	sS	256	-	SupplierStandard	126
104101606300089	16	2,160	Galvanized	zZ	256	-	SupplierStandard	126
104101705050089	17	1,770	Bright	sS	240	-	SupplierStandard	141
104101706050089	17	1,770	Bright	zZ	240	-	SupplierStandard	141
104101705250089	17	1,770	Galvanized	sS	240	-	SupplierStandard	141
104101706250089	17	1,770	Galvanized	zZ	240	-	SupplierStandard	141
104101705070089	17	1,960	Bright	sS	267	-	SupplierStandard	141
104101706070089	17	1,960	Bright	zZ	267	-	SupplierStandard	141
104101705270089	17	1,960	Galvanized	sS	267	-	SupplierStandard	141
104101706270089	17	1,960	Galvanized	zZ	267	-	SupplierStandard	141
104101705100089	17	2,160	Bright	sS	287	-	SupplierStandard	141
104101706100089	17	2,160	Bright	zZ	287	-	SupplierStandard	141
104101705300089	17	2,160	Galvanized	sS	287	-	SupplierStandard	141
104101706300089	17	2,160	Galvanized	zZ	287	-	SupplierStandard	141
104101805050089	18	1,770	Bright	sS	271	-	SupplierStandard	159
104101806050089	18	1,770	Bright	zZ	271	-	SupplierStandard	159
104101805250089	18	1,770	Galvanized	sS	271	-	SupplierStandard	159
104101806250089	18	1,770	Galvanized	zZ	271	-	SupplierStandard	159

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104101805070089	18	1,960	Bright	sS	301	-	SupplierStandard	159
104101806070089	18	1,960	Bright	zZ	301	-	SupplierStandard	159
104101805270089	18	1,960	Galvanized	sS	301	-	SupplierStandard	159
104101806270089	18	1,960	Galvanized	zZ	301	-	SupplierStandard	159
104101805100089	18	2,160	Bright	sS	323	-	SupplierStandard	159
104101806100089	18	2,160	Bright	zZ	323	-	SupplierStandard	159
104101805300089	18	2,160	Galvanized	sS	323	-	SupplierStandard	159
104101806300089	18	2,160	Galvanized	zZ	323	-	SupplierStandard	159
104101905050089	19	1,770	Bright	sS	300	-	SupplierStandard	176
104101906050089	19	1,770	Bright	zZ	300	-	SupplierStandard	176
104101905250089	19	1,770	Galvanized	sS	300	-	SupplierStandard	176
104101906250089	19	1,770	Galvanized	zZ	300	-	SupplierStandard	176
104101905070089	19	1,960	Bright	sS	333	-	SupplierStandard	176
104101906070089	19	1,960	Bright	zZ	333	-	SupplierStandard	176
104101905270089	19	1,960	Galvanized	sS	333	-	SupplierStandard	176
104101906270089	19	1,960	Galvanized	zZ	333	-	SupplierStandard	176
104101905100089	19	2,160	Bright	sS	358	-	SupplierStandard	176
104101906100089	19	2,160	Bright	zZ	358	-	SupplierStandard	176
104101905300089	19	2,160	Galvanized	sS	358	-	SupplierStandard	176
104101906300089	19	2,160	Galvanized	zZ	358	-	SupplierStandard	176
104102005050089	20	1,770	Bright	sS	334	-	SupplierStandard	196
104102006050089	20	1,770	Bright	zZ	334	-	SupplierStandard	196
104102005250089	20	1,770	Galvanized	sS	334	-	SupplierStandard	196
104102006250089	20	1,770	Galvanized	zZ	334	-	SupplierStandard	196
104102005070089	20	1,960	Bright	sS	371	-	SupplierStandard	196
104102006070089	20	1,960	Bright	zZ	371	-	SupplierStandard	196
104102005270089	20	1,960	Galvanized	sS	371	-	SupplierStandard	196
104102006270089	20	1,960	Galvanized	zZ	371	-	SupplierStandard	196
104102005100089	20	2,160	Bright	sS	398	-	SupplierStandard	196
104102006100089	20	2,160	Bright	zZ	398	-	SupplierStandard	196
104102005300089	20	2,160	Galvanized	sS	398	-	SupplierStandard	196

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104102006300089	20	2,160	Galvanized	zZ	398	-	SupplierStandard	196
104102105050089	21	1,770	Bright	sS	371	-	SupplierStandard	218
104102106050089	21	1,770	Bright	zZ	371	-	SupplierStandard	218
104102105250089	21	1,770	Galvanized	sS	371	-	SupplierStandard	218
104102106250089	21	1,770	Galvanized	zZ	371	-	SupplierStandard	218
104102105070089	21	1,960	Bright	sS	412	-	SupplierStandard	218
104102106070089	21	1,960	Bright	zZ	412	-	SupplierStandard	218
104102105270089	21	1,960	Galvanized	sS	412	-	SupplierStandard	218
104102106270089	21	1,960	Galvanized	zZ	412	-	SupplierStandard	218
104102105100089	21	2,160	Bright	sS	442	-	SupplierStandard	218
104102106100089	21	2,160	Bright	zZ	442	-	SupplierStandard	218
104102105300089	21	2,160	Galvanized	sS	442	-	SupplierStandard	218
104102106300089	21	2,160	Galvanized	zZ	442	-	SupplierStandard	218
104102205050089	22	1,770	Bright	sS	406	-	SupplierStandard	238
104102206050089	22	1,770	Bright	zZ	406	-	SupplierStandard	238
104102205250089	22	1,770	Galvanized	sS	406	-	SupplierStandard	238
104102206250089	22	1,770	Galvanized	zZ	406	-	SupplierStandard	238
104102205070089	22	1,960	Bright	sS	451	-	SupplierStandard	238
104102206070089	22	1,960	Bright	zZ	451	-	SupplierStandard	238
104102205270089	22	1,960	Galvanized	sS	451	-	SupplierStandard	238
104102206270089	22	1,960	Galvanized	zZ	451	-	SupplierStandard	238
104102205100089	22	2,160	Bright	sS	485	-	SupplierStandard	238
104102206100089	22	2,160	Bright	zZ	485	-	SupplierStandard	238
104102205300089	22	2,160	Galvanized	sS	485	-	SupplierStandard	238
104102206300089	22	2,160	Galvanized	zZ	485	-	SupplierStandard	238
104102305050089	23	1,770	Bright	sS	442	-	SupplierStandard	260
104102306050089	23	1,770	Bright	zZ	442	-	SupplierStandard	260
104102305250089	23	1,770	Galvanized	sS	442	-	SupplierStandard	260
104102306250089	23	1,770	Galvanized	zZ	442	-	SupplierStandard	260
104102305070089	23	1,960	Bright	sS	491	-	SupplierStandard	260
104102306070089	23	1,960	Bright	zZ	491	-	SupplierStandard	260

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104102305270089	23	1,960	Galvanized	sS	491	-	SupplierStandard	260
104102306270089	23	1,960	Galvanized	zZ	491	-	SupplierStandard	260
104102305100089	23	2,160	Bright	sS	528	-	SupplierStandard	260
104102306100089	23	2,160	Bright	zZ	528	-	SupplierStandard	260
104102305300089	23	2,160	Galvanized	sS	528	-	SupplierStandard	260
104102306300089	23	2,160	Galvanized	zZ	528	-	SupplierStandard	260
104102405050089	24	1,770	Bright	sS	481	-	SupplierStandard	282
104102406050089	24	1,770	Bright	zZ	481	-	SupplierStandard	282
104102405250089	24	1,770	Galvanized	sS	481	-	SupplierStandard	282
104102406250089	24	1,770	Galvanized	zZ	481	-	SupplierStandard	282
104102405070089	24	1,960	Bright	sS	534	-	SupplierStandard	282
104102406070089	24	1,960	Bright	zZ	534	-	SupplierStandard	282
104102405270089	24	1,960	Galvanized	sS	534	-	SupplierStandard	282
104102406270089	24	1,960	Galvanized	zZ	534	-	SupplierStandard	282
104102405100089	24	2,160	Bright	sS	573	-	SupplierStandard	282
104102406100089	24	2,160	Bright	zZ	573	-	SupplierStandard	282
104102405300089	24	2,160	Galvanized	sS	573	-	SupplierStandard	282
104102406300089	24	2,160	Galvanized	zZ	573	-	SupplierStandard	282
104102505050089	25	1,770	Bright	sS	512	-	SupplierStandard	301
104102506050089	25	1,770	Bright	zZ	512	-	SupplierStandard	301
104102505250089	25	1,770	Galvanized	sS	512	-	SupplierStandard	301
104102506250089	25	1,770	Galvanized	zZ	512	-	SupplierStandard	301
104102505070089	25	1,960	Bright	sS	569	-	SupplierStandard	301
104102506070089	25	1,960	Bright	zZ	569	-	SupplierStandard	301
104102505270089	25	1,960	Galvanized	sS	569	-	SupplierStandard	301
104102506270089	25	1,960	Galvanized	zZ	569	-	SupplierStandard	301
104102505100089	25	2,160	Bright	sS	611	-	SupplierStandard	301
104102506100089	25	2,160	Bright	zZ	611	-	SupplierStandard	301
104102505300089	25	2,160	Galvanized	sS	611	-	SupplierStandard	301
104102506300089	25	2,160	Galvanized	zZ	611	-	SupplierStandard	301
104102605050089	26	1,770	Bright	sS	554	-	SupplierStandard	325

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104102606050089	26	1,770	Bright	zZ	554	-	SupplierStandard	325
104102605250089	26	1,770	Galvanized	sS	554	-	SupplierStandard	325
104102606250089	26	1,770	Galvanized	zZ	554	-	SupplierStandard	325
104102605070089	26	1,960	Bright	sS	616	-	SupplierStandard	325
104102606070089	26	1,960	Bright	zZ	616	-	SupplierStandard	325
104102605270089	26	1,960	Galvanized	sS	616	-	SupplierStandard	325
104102606270089	26	1,960	Galvanized	zZ	616	-	SupplierStandard	325
104102605100089	26	2,160	Bright	sS	661	-	SupplierStandard	325
104102606100089	26	2,160	Bright	zZ	661	-	SupplierStandard	325
104102605300089	26	2,160	Galvanized	sS	661	-	SupplierStandard	325
104102606300089	26	2,160	Galvanized	zZ	661	-	SupplierStandard	325
104102805050089	28	1,770	Bright	sS	652	-	SupplierStandard	383
104102806050089	28	1,770	Bright	zZ	652	-	SupplierStandard	383
104102805250089	28	1,770	Galvanized	sS	652	-	SupplierStandard	383
104102806250089	28	1,770	Galvanized	zZ	652	-	SupplierStandard	383
104102805070089	28	1,960	Bright	sS	725	-	SupplierStandard	383
104102806070089	28	1,960	Bright	zZ	725	-	SupplierStandard	383
104102805270089	28	1,960	Galvanized	sS	725	-	SupplierStandard	383
104102806270089	28	1,960	Galvanized	zZ	725	-	SupplierStandard	383
104102805100089	28	2,160	Bright	sS	778	-	SupplierStandard	383
104102806100089	28	2,160	Bright	zZ	778	-	SupplierStandard	383
104102805300089	28	2,160	Galvanized	sS	778	-	SupplierStandard	383
104102806300089	28	2,160	Galvanized	zZ	778	-	SupplierStandard	383
104103005050089	30	1,770	Bright	sS	740	-	SupplierStandard	434
104103006050089	30	1,770	Bright	zZ	740	-	SupplierStandard	434
104103005250089	30	1,770	Galvanized	sS	740	-	SupplierStandard	434
104103006250089	30	1,770	Galvanized	zZ	740	-	SupplierStandard	434
104103005070089	30	1,960	Bright	sS	822	-	SupplierStandard	434
104103006070089	30	1,960	Bright	zZ	822	-	SupplierStandard	434
104103005270089	30	1,960	Galvanized	sS	822	-	SupplierStandard	434
104103006270089	30	1,960	Galvanized	zZ	822	-	SupplierStandard	434

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104103005100089	30	2,160	Bright	sS	883	-	SupplierStandard	434
104103006100089	30	2,160	Bright	zZ	883	-	SupplierStandard	434
104103005300089	30	2,160	Galvanized	sS	883	-	SupplierStandard	434
104103006300089	30	2,160	Galvanized	zZ	883	-	SupplierStandard	434
104103205050089	32	1,770	Bright	sS	844	-	SupplierStandard	495
104103206050089	32	1,770	Bright	zZ	844	-	SupplierStandard	495
104103205250089	32	1,770	Galvanized	sS	844	-	SupplierStandard	495
104103206250089	32	1,770	Galvanized	zZ	844	-	SupplierStandard	495
104103205070089	32	1,960	Bright	sS	937	-	SupplierStandard	495
104103206070089	32	1,960	Bright	zZ	937	-	SupplierStandard	495
104103205270089	32	1,960	Galvanized	sS	937	-	SupplierStandard	495
104103206270089	32	1,960	Galvanized	zZ	937	-	SupplierStandard	495
104103205100089	32	2,160	Bright	sS	1,006	-	SupplierStandard	495
104103206100089	32	2,160	Bright	zZ	1,006	-	SupplierStandard	495
104103205300089	32	2,160	Galvanized	sS	1,006	-	SupplierStandard	495
104103206300089	32	2,160	Galvanized	zZ	1,006	-	SupplierStandard	495
104103405050089	34	1,770	Bright	sS	952	-	SupplierStandard	559
104103406050089	34	1,770	Bright	zZ	952	-	SupplierStandard	559
104103405250089	34	1,770	Galvanized	sS	952	-	SupplierStandard	559
104103406250089	34	1,770	Galvanized	zZ	952	-	SupplierStandard	559
104103405070089	34	1,960	Bright	sS	1,058	-	SupplierStandard	559
104103406070089	34	1,960	Bright	zZ	1,058	-	SupplierStandard	559
104103405270089	34	1,960	Galvanized	sS	1,058	-	SupplierStandard	559
104103406270089	34	1,960	Galvanized	zZ	1,058	-	SupplierStandard	559
104103405100089	34	2,160	Bright	sS	1,136	-	SupplierStandard	559
104103406100089	34	2,160	Bright	zZ	1,136	-	SupplierStandard	559
104103405300089	34	2,160	Galvanized	sS	1,136	-	SupplierStandard	559
104103406300089	34	2,160	Galvanized	zZ	1,136	-	SupplierStandard	559
104103605050089	36	1,770	Bright	sS	1,072	-	SupplierStandard	629
104103606050089	36	1,770	Bright	zZ	1,072	-	SupplierStandard	629
104103605250089	36	1,770	Galvanized	sS	1,072	-	SupplierStandard	629

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104103606250089	36	1,770	Galvanized	zZ	1,072	-	SupplierStandard	629
104103605070089	36	1,960	Bright	sS	1,191	-	SupplierStandard	629
104103606070089	36	1,960	Bright	zZ	1,191	-	SupplierStandard	629
104103605270089	36	1,960	Galvanized	sS	1,191	-	SupplierStandard	629
104103606270089	36	1,960	Galvanized	zZ	1,191	-	SupplierStandard	629
104103605100089	36	2,160	Bright	sS	1,279	-	SupplierStandard	629
104103606100089	36	2,160	Bright	zZ	1,279	-	SupplierStandard	629
104103605300089	36	2,160	Galvanized	sS	1,279	-	SupplierStandard	629
104103606300089	36	2,160	Galvanized	zZ	1,279	-	SupplierStandard	629
104103805050089	38	1,770	Bright	sS	1,194	-	SupplierStandard	701
104103806050089	38	1,770	Bright	zZ	1,194	-	SupplierStandard	701
104103805250089	38	1,770	Galvanized	sS	1,194	-	SupplierStandard	701
104103806250089	38	1,770	Galvanized	zZ	1,194	-	SupplierStandard	701
104103805070089	38	1,960	Bright	sS	1,327	-	SupplierStandard	701
104103806070089	38	1,960	Bright	zZ	1,327	-	SupplierStandard	701
104103805270089	38	1,960	Galvanized	sS	1,327	-	SupplierStandard	701
104103806270089	38	1,960	Galvanized	zZ	1,327	-	SupplierStandard	701
104103805100089	38	2,160	Bright	sS	1,425	-	SupplierStandard	701
104103806100089	38	2,160	Bright	zZ	1,425	-	SupplierStandard	701
104103805300089	38	2,160	Galvanized	sS	1,425	-	SupplierStandard	701
104103806300089	38	2,160	Galvanized	zZ	1,425	-	SupplierStandard	701
104104005050089	40	1,770	Bright	sS	1,323	-	SupplierStandard	777
104104006050089	40	1,770	Bright	zZ	1,323	-	SupplierStandard	777
104104005250089	40	1,770	Galvanized	sS	1,323	-	SupplierStandard	777
104104006250089	40	1,770	Galvanized	zZ	1,323	-	SupplierStandard	777
104104005070089	40	1,960	Bright	sS	1,471	-	SupplierStandard	777
104104006070089	40	1,960	Bright	zZ	1,471	-	SupplierStandard	777
104104005270089	40	1,960	Galvanized	sS	1,471	-	SupplierStandard	777
104104006270089	40	1,960	Galvanized	zZ	1,471	-	SupplierStandard	777
104104005100089	40	2,160	Bright	sS	1,579	-	SupplierStandard	777
104104006100089	40	2,160	Bright	zZ	1,579	-	SupplierStandard	777

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104104005300089	40	2,160	Galvanized	sS	1,579	-	SupplierStandard	777
104104006300089	40	2,160	Galvanized	zZ	1,579	-	SupplierStandard	777
104104205050089	42	1,770	Bright	sS	1,459	-	SupplierStandard	856
104104206050089	42	1,770	Bright	zZ	1,459	-	SupplierStandard	856
104104205250089	42	1,770	Galvanized	sS	1,459	-	SupplierStandard	856
104104206250089	42	1,770	Galvanized	zZ	1,459	-	SupplierStandard	856
104104205070089	42	1,960	Bright	sS	1,621	-	SupplierStandard	856
104104206070089	42	1,960	Bright	zZ	1,621	-	SupplierStandard	856
104104205270089	42	1,960	Galvanized	sS	1,621	-	SupplierStandard	856
104104206270089	42	1,960	Galvanized	zZ	1,621	-	SupplierStandard	856
104104205100089	42	2,160	Bright	sS	1,741	-	SupplierStandard	856
104104206100089	42	2,160	Bright	zZ	1,741	-	SupplierStandard	856
104104205300089	42	2,160	Galvanized	sS	1,741	-	SupplierStandard	856
104104206300089	42	2,160	Galvanized	zZ	1,741	-	SupplierStandard	856
104104405050089	44	1,770	Bright	sS	1,601	-	SupplierStandard	940
104104406050089	44	1,770	Bright	zZ	1,601	-	SupplierStandard	940
104104405250089	44	1,770	Galvanized	sS	1,601	-	SupplierStandard	940
104104406250089	44	1,770	Galvanized	zZ	1,601	-	SupplierStandard	940
104104406300089	44	2,160	Galvanized	zZ	1,741	-	SupplierStandard	940
104104405070089	44	1,960	Bright	sS	1,780	-	SupplierStandard	940
104104406070089	44	1,960	Bright	zZ	1,780	-	SupplierStandard	940
104104405270089	44	1,960	Galvanized	sS	1,780	-	SupplierStandard	940
104104406270089	44	1,960	Galvanized	zZ	1,780	-	SupplierStandard	940
104104405100089	44	2,160	Bright	sS	1,910	-	SupplierStandard	940
104104406100089	44	2,160	Bright	zZ	1,910	-	SupplierStandard	940
104104405300089	44	2,160	Galvanized	sS	1,910	-	SupplierStandard	940
104104605050089	46	1,770	Bright	sS	1,750	-	SupplierStandard	1,027
104104606050089	46	1,770	Bright	zZ	1,750	-	SupplierStandard	1,027
104104605250089	46	1,770	Galvanized	sS	1,750	-	SupplierStandard	1,027
104104606250089	46	1,770	Galvanized	zZ	1,750	-	SupplierStandard	1,027
104104605070089	46	1,960	Bright	sS	1,945	-	SupplierStandard	1,027

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104104606070089	46	1,960	Bright	zZ	1,945	-	SupplierStandard	1,027
104104605270089	46	1,960	Galvanized	sS	1,945	-	SupplierStandard	1,027
104104606270089	46	1,960	Galvanized	zZ	1,945	-	SupplierStandard	1,027
104104605100089	46	2,160	Bright	sS	2,088	-	SupplierStandard	1,027
104104606100089	46	2,160	Bright	zZ	2,088	-	SupplierStandard	1,027
104104605300089	46	2,160	Galvanized	sS	2,088	-	SupplierStandard	1,027
104104606300089	46	2,160	Galvanized	zZ	2,088	-	SupplierStandard	1,027
104104805050089	48	1,770	Bright	sS	1,906	-	SupplierStandard	1,118
104104806050089	48	1,770	Bright	zZ	1,906	-	SupplierStandard	1,118
104104805250089	48	1,770	Galvanized	sS	1,906	-	SupplierStandard	1,118
104104806250089	48	1,770	Galvanized	zZ	1,906	-	SupplierStandard	1,118
104104805070089	48	1,960	Bright	sS	2,117	-	SupplierStandard	1,118
104104806070089	48	1,960	Bright	zZ	2,117	-	SupplierStandard	1,118
104104805270089	48	1,960	Galvanized	sS	2,117	-	SupplierStandard	1,118
104104806270089	48	1,960	Galvanized	zZ	2,117	-	SupplierStandard	1,118
104104805100089	48	2,160	Bright	sS	2,273	-	SupplierStandard	1,118
104104806100089	48	2,160	Bright	zZ	2,273	-	SupplierStandard	1,118
104104805300089	48	2,160	Galvanized	sS	2,273	-	SupplierStandard	1,118
104104806300089	48	2,160	Galvanized	zZ	2,273	-	SupplierStandard	1,118
104105005050089	50	1,770	Bright	sS	2,068	-	SupplierStandard	1,214
104105006050089	50	1,770	Bright	zZ	2,068	-	SupplierStandard	1,214
104105005250089	50	1,770	Galvanized	sS	2,068	-	SupplierStandard	1,214
104105006250089	50	1,770	Galvanized	zZ	2,068	-	SupplierStandard	1,214
104105005070089	50	1,960	Bright	sS	2,298	-	SupplierStandard	1,214
104105006070089	50	1,960	Bright	zZ	2,298	-	SupplierStandard	1,214
104105005270089	50	1,960	Galvanized	sS	2,298	-	SupplierStandard	1,214
104105006270089	50	1,960	Galvanized	zZ	2,298	-	SupplierStandard	1,214
104105005100089	50	2,160	Bright	sS	2,467	-	SupplierStandard	1,214
104105006100089	50	2,160	Bright	zZ	2,467	-	SupplierStandard	1,214
104105005300089	50	2,160	Galvanized	sS	2,467	-	SupplierStandard	1,214
104105006300089	50	2,160	Galvanized	zZ	2,467	-	SupplierStandard	1,214

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104105205050089	52	1,770	Bright	sS	2,237	-	SupplierStandard	1,313
104105206050089	52	1,770	Bright	zZ	2,237	-	SupplierStandard	1,313
104105205250089	52	1,770	Galvanized	sS	2,237	-	SupplierStandard	1,313
104105206250089	52	1,770	Galvanized	zZ	2,237	-	SupplierStandard	1,313
104105205070089	52	1,960	Bright	sS	2,485	-	SupplierStandard	1,313
104105206070089	52	1,960	Bright	zZ	2,485	-	SupplierStandard	1,313
104105205270089	52	1,960	Galvanized	sS	2,485	-	SupplierStandard	1,313
104105206270089	52	1,960	Galvanized	zZ	2,485	-	SupplierStandard	1,313
104105205100089	52	2,160	Bright	sS	2,668	-	SupplierStandard	1,313
104105206100089	52	2,160	Bright	zZ	2,668	-	SupplierStandard	1,313
104105205300089	52	2,160	Galvanized	sS	2,668	-	SupplierStandard	1,313
104105206300089	52	2,160	Galvanized	zZ	2,668	-	SupplierStandard	1,313
104105405050089	54	1,770	Bright	sS	2,412	-	SupplierStandard	1,415
104105406050089	54	1,770	Bright	zZ	2,412	-	SupplierStandard	1,415
104105405250089	54	1,770	Galvanized	sS	2,412	-	SupplierStandard	1,415
104105406250089	54	1,770	Galvanized	zZ	2,412	-	SupplierStandard	1,415
104105405070089	54	1,960	Bright	sS	2,681	-	SupplierStandard	1,415
104105406070089	54	1,960	Bright	zZ	2,681	-	SupplierStandard	1,415
104105405270089	54	1,960	Galvanized	sS	2,681	-	SupplierStandard	1,415
104105406270089	54	1,960	Galvanized	zZ	2,681	-	SupplierStandard	1,415
104105405100089	54	2,160	Bright	sS	2,878	-	SupplierStandard	1,415
104105406100089	54	2,160	Bright	zZ	2,878	-	SupplierStandard	1,415
104105405300089	54	2,160	Galvanized	sS	2,878	-	SupplierStandard	1,415
104105406300089	54	2,160	Galvanized	zZ	2,878	-	SupplierStandard	1,415
104105605050089	56	1,770	Bright	sS	2,594	-	SupplierStandard	1,522
104105606050089	56	1,770	Bright	zZ	2,594	-	SupplierStandard	1,522
104105605250089	56	1,770	Galvanized	sS	2,594	-	SupplierStandard	1,522
104105606250089	56	1,770	Galvanized	zZ	2,594	-	SupplierStandard	1,522
104105605070089	56	1,960	Bright	sS	2,883	-	SupplierStandard	1,522
104105606070089	56	1,960	Bright	zZ	2,883	-	SupplierStandard	1,522
104105605270089	56	1,960	Galvanized	sS	2,883	-	SupplierStandard	1,522

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104105606270089	56	1,960	Galvanized	zZ	2,883	-	SupplierStandard	1,522
104105605100089	56	2,160	Bright	sS	3,095	-	SupplierStandard	1,522
104105606100089	56	2,160	Bright	zZ	3,095	-	SupplierStandard	1,522
104105605300089	56	2,160	Galvanized	sS	3,095	-	SupplierStandard	1,522
104105606300089	56	2,160	Galvanized	zZ	3,095	-	SupplierStandard	1,522
104105805050089	58	1,770	Bright	sS	2,790	-	SupplierStandard	1,633
104105806050089	58	1,770	Bright	zZ	2,790	-	SupplierStandard	1,633
104105805250089	58	1,770	Galvanized	sS	2,790	-	SupplierStandard	1,633
104105806250089	58	1,770	Galvanized	zZ	2,790	-	SupplierStandard	1,633
104105805070089	58	1,960	Bright	sS	3,090	-	SupplierStandard	1,633
104105806070089	58	1,960	Bright	zZ	3,090	-	SupplierStandard	1,633
104105805270089	58	1,960	Galvanized	sS	3,090	-	SupplierStandard	1,633
104105806270089	58	1,960	Galvanized	zZ	3,090	-	SupplierStandard	1,633
104105805100089	58	2,160	Bright	sS	3,324	-	SupplierStandard	1,633
104105806100089	58	2,160	Bright	zZ	3,324	-	SupplierStandard	1,633
104105805300089	58	2,160	Galvanized	sS	3,324	-	SupplierStandard	1,633
104105806300089	58	2,160	Galvanized	zZ	3,324	-	SupplierStandard	1,633
104106005050089	60	1,770	Bright	sS	2,986	-	SupplierStandard	1,747
104106006050089	60	1,770	Bright	zZ	2,986	-	SupplierStandard	1,747
104106005250089	60	1,770	Galvanized	sS	2,986	-	SupplierStandard	1,747
104106006250089	60	1,770	Galvanized	zZ	2,986	-	SupplierStandard	1,747
104106005070089	60	1,960	Bright	sS	3,307	-	SupplierStandard	1,747
104106006070089	60	1,960	Bright	zZ	3,307	-	SupplierStandard	1,747
104106005270089	60	1,960	Galvanized	sS	3,307	-	SupplierStandard	1,747
104106006270089	60	1,960	Galvanized	zZ	3,307	-	SupplierStandard	1,747
104106005100089	60	2,160	Bright	sS	3,557	-	SupplierStandard	1,747
104106006100089	60	2,160	Bright	zZ	3,557	-	SupplierStandard	1,747
104106005300089	60	2,160	Galvanized	sS	3,557	-	SupplierStandard	1,747
104106006300089	60	2,160	Galvanized	zZ	3,557	-	SupplierStandard	1,747
104106205050089	62	1,770	Bright	sS	3,188	-	SupplierStandard	1,866
104106206050089	62	1,770	Bright	zZ	3,188	-	SupplierStandard	1,866

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104106205250089	62	1,770	Galvanized	sS	3,188	-	SupplierStandard	1,866
104106206250089	62	1,770	Galvanized	zZ	3,188	-	SupplierStandard	1,866
104106205070089	62	1,960	Bright	sS	3,530	-	SupplierStandard	1,866
104106206070089	62	1,960	Bright	zZ	3,530	-	SupplierStandard	1,866
104106205270089	62	1,960	Galvanized	sS	3,530	-	SupplierStandard	1,866
104106206270089	62	1,960	Galvanized	zZ	3,530	-	SupplierStandard	1,866
104106205100089	62	2,160	Bright	sS	3,797	-	SupplierStandard	1,866
104106206100089	62	2,160	Bright	zZ	3,797	-	SupplierStandard	1,866
104106205300089	62	2,160	Galvanized	sS	3,797	-	SupplierStandard	1,866
104106206300089	62	2,160	Galvanized	zZ	3,797	-	SupplierStandard	1,866
104106405050089	64	1,770	Bright	sS	3,397	-	SupplierStandard	1,988
104106406050089	64	1,770	Bright	zZ	3,397	-	SupplierStandard	1,988
104106405250089	64	1,770	Galvanized	sS	3,397	-	SupplierStandard	1,988
104106406250089	64	1,770	Galvanized	zZ	3,397	-	SupplierStandard	1,988
104106405070089	64	1,960	Bright	sS	3,762	-	SupplierStandard	1,988
104106406070089	64	1,960	Bright	zZ	3,762	-	SupplierStandard	1,988
104106405270089	64	1,960	Galvanized	sS	3,762	-	SupplierStandard	1,988
104106406270089	64	1,960	Galvanized	zZ	3,762	-	SupplierStandard	1,988
104106405100089	64	2,160	Bright	sS	4,046	-	SupplierStandard	1,988
104106406100089	64	2,160	Bright	zZ	4,046	-	SupplierStandard	1,988
104106405300089	64	2,160	Galvanized	sS	4,046	-	SupplierStandard	1,988
104106406300089	64	2,160	Galvanized	zZ	4,046	-	SupplierStandard	1,988
104106605050089	66	1,770	Bright	sS	3,613	-	SupplierStandard	2,114
104106606050089	66	1,770	Bright	zZ	3,613	-	SupplierStandard	2,114
104106605250089	66	1,770	Galvanized	sS	3,613	-	SupplierStandard	2,114
104106606250089	66	1,770	Galvanized	zZ	3,613	-	SupplierStandard	2,114
104106605070089	66	1,960	Bright	sS	4,000	-	SupplierStandard	2,114
104106606070089	66	1,960	Bright	zZ	4,000	-	SupplierStandard	2,114
104106605270089	66	1,960	Galvanized	sS	4,000	-	SupplierStandard	2,114
104106606270089	66	1,960	Galvanized	zZ	4,000	-	SupplierStandard	2,114
104106605100089	66	2,160	Bright	sS	4,303	-	SupplierStandard	2,114

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104106606100089	66	2,160	Bright	zZ	4,303	-	SupplierStandard	2,114
104106605300089	66	2,160	Galvanized	sS	4,303	-	SupplierStandard	2,114
104106606300089	66	2,160	Galvanized	zZ	4,303	-	SupplierStandard	2,114
104106805050089	68	1,770	Bright	sS	3,825	-	SupplierStandard	2,245
104106806050089	68	1,770	Bright	zZ	3,825	-	SupplierStandard	2,245
104106805250089	68	1,770	Galvanized	sS	3,825	-	SupplierStandard	2,245
104106806250089	68	1,770	Galvanized	zZ	3,825	-	SupplierStandard	2,245
104106805070089	68	1,960	Bright	sS	4,247	-	SupplierStandard	2,245
104106806070089	68	1,960	Bright	zZ	4,247	-	SupplierStandard	2,245
104106805270089	68	1,960	Galvanized	sS	4,247	-	SupplierStandard	2,245
104106806270089	68	1,960	Galvanized	zZ	4,247	-	SupplierStandard	2,245
104106805100089	68	2,160	Bright	sS	4,568	-	SupplierStandard	2,245
104106806100089	68	2,160	Bright	zZ	4,568	-	SupplierStandard	2,245
104106805300089	68	2,160	Galvanized	sS	4,568	-	SupplierStandard	2,245
104106806300089	68	2,160	Galvanized	zZ	4,568	-	SupplierStandard	2,245
104107005050089	70	1,770	Bright	sS	4,064	-	SupplierStandard	2,379
104107006050089	70	1,770	Bright	zZ	4,064	-	SupplierStandard	2,379
104107005250089	70	1,770	Galvanized	sS	4,064	-	SupplierStandard	2,379
104107006250089	70	1,770	Galvanized	zZ	4,064	-	SupplierStandard	2,379
104107005070089	70	1,960	Bright	sS	4,500	-	SupplierStandard	2,379
104107006070089	70	1,960	Bright	zZ	4,500	-	SupplierStandard	2,379
104107005270089	70	1,960	Galvanized	sS	4,500	-	SupplierStandard	2,379
104107006270089	70	1,960	Galvanized	zZ	4,500	-	SupplierStandard	2,379
104107005100089	70	2,160	Bright	sS	4,840	-	SupplierStandard	2,379
104107006100089	70	2,160	Bright	zZ	4,840	-	SupplierStandard	2,379
104107005300089	70	2,160	Galvanized	sS	4,840	-	SupplierStandard	2,379
104107006300089	70	2,160	Galvanized	zZ	4,840	-	SupplierStandard	2,379
104107205050089	72	1,770	Bright	sS	4,299	-	SupplierStandard	2,516
104107206050089	72	1,770	Bright	zZ	4,299	-	SupplierStandard	2,516
104107205250089	72	1,770	Galvanized	sS	4,299	-	SupplierStandard	2,516
104107206250089	72	1,770	Galvanized	zZ	4,299	-	SupplierStandard	2,516

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104107205070089	72	1,960	Bright	sS	4,761	-	SupplierStandard	2,516
104107206070089	72	1,960	Bright	zZ	4,761	-	SupplierStandard	2,516
104107205270089	72	1,960	Galvanized	sS	4,761	-	SupplierStandard	2,516
104107206270089	72	1,960	Galvanized	zZ	4,761	-	SupplierStandard	2,516
104107405050089	74	1,770	Bright	sS	4,542	-	SupplierStandard	2,658
104107406050089	74	1,770	Bright	zZ	4,542	-	SupplierStandard	2,658
104107405250089	74	1,770	Galvanized	sS	4,542	-	SupplierStandard	2,658
104107406250089	74	1,770	Galvanized	zZ	4,542	-	SupplierStandard	2,658
104107405070089	74	1,960	Bright	sS	5,029	-	SupplierStandard	2,658
104107406070089	74	1,960	Bright	zZ	5,029	-	SupplierStandard	2,658
104107405270089	74	1,960	Galvanized	sS	5,029	-	SupplierStandard	2,658
104107406270089	74	1,960	Galvanized	zZ	5,029	-	SupplierStandard	2,658
104107605070089	76	1,960	Bright	sS	4,761	-	SupplierStandard	2,804
104107605050089	76	1,770	Bright	sS	4,790	-	SupplierStandard	2,804
104107606050089	76	1,770	Bright	zZ	4,790	-	SupplierStandard	2,804
104107605250089	76	1,770	Galvanized	sS	4,790	-	SupplierStandard	2,804
104107606250089	76	1,770	Galvanized	zZ	4,790	-	SupplierStandard	2,804
104107606070089	76	1,960	Bright	zZ	5,305	-	SupplierStandard	2,804
104107605270089	76	1,960	Galvanized	sS	5,305	-	SupplierStandard	2,804
104107606270089	76	1,960	Galvanized	zZ	5,305	-	SupplierStandard	2,804
104107805050089	78	1,770	Bright	sS	5,046	-	SupplierStandard	2,953
104107806050089	78	1,770	Bright	zZ	5,046	-	SupplierStandard	2,953
104107805250089	78	1,770	Galvanized	sS	5,046	-	SupplierStandard	2,953
104107806250089	78	1,770	Galvanized	zZ	5,046	-	SupplierStandard	2,953
104107805070089	78	1,960	Bright	sS	5,588	-	SupplierStandard	2,953
104107806070089	78	1,960	Bright	zZ	5,588	-	SupplierStandard	2,953
104107805270089	78	1,960	Galvanized	sS	5,588	-	SupplierStandard	2,953
104107806270089	78	1,960	Galvanized	zZ	5,588	-	SupplierStandard	2,953
104108005050089	80	1,770	Bright	sS	5,308	-	SupplierStandard	3,107
104108006050089	80	1,770	Bright	zZ	5,308	-	SupplierStandard	3,107
104108005250089	80	1,770	Galvanized	sS	5,308	-	SupplierStandard	3,107

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104108006250089	80	1,770	Galvanized	zZ	5,308	-	SupplierStandard	3,107
104108005070089	80	1,960	Bright	sS	5,878	-	SupplierStandard	3,107
104108006070089	80	1,960	Bright	zZ	5,878	-	SupplierStandard	3,107
104108005270089	80	1,960	Galvanized	sS	5,878	-	SupplierStandard	3,107
104108006270089	80	1,960	Galvanized	zZ	5,878	-	SupplierStandard	3,107
104108205050089	82	1,770	Bright	sS	5,577	-	SupplierStandard	3,264
104108206050089	82	1,770	Bright	zZ	5,577	-	SupplierStandard	3,264
104108205250089	82	1,770	Galvanized	sS	5,577	-	SupplierStandard	3,264
104108206250089	82	1,770	Galvanized	zZ	5,577	-	SupplierStandard	3,264
104108205070089	82	1,960	Bright	sS	6,176	-	SupplierStandard	3,264
104108206070089	82	1,960	Bright	zZ	6,176	-	SupplierStandard	3,264
104108205270089	82	1,960	Galvanized	sS	6,176	-	SupplierStandard	3,264
104108206270089	82	1,960	Galvanized	zZ	6,176	-	SupplierStandard	3,264
104108405050089	84	1,770	Bright	sS	5,852	-	SupplierStandard	3,425
104108406050089	84	1,770	Bright	zZ	5,852	-	SupplierStandard	3,425
104108405250089	84	1,770	Galvanized	sS	5,852	-	SupplierStandard	3,425
104108406250089	84	1,770	Galvanized	zZ	5,852	-	SupplierStandard	3,425
104108405070089	84	1,960	Bright	sS	6,480	-	SupplierStandard	3,425
104108406070089	84	1,960	Bright	zZ	6,480	-	SupplierStandard	3,425
104108405270089	84	1,960	Galvanized	sS	6,480	-	SupplierStandard	3,425
104108406270089	84	1,960	Galvanized	zZ	6,480	-	SupplierStandard	3,425
104108605050089	86	1,770	Bright	sS	6,134	-	SupplierStandard	3,590
104108606050089	86	1,770	Bright	zZ	6,134	-	SupplierStandard	3,590
104108605250089	86	1,770	Galvanized	sS	6,134	-	SupplierStandard	3,590
104108606250089	86	1,770	Galvanized	zZ	6,134	-	SupplierStandard	3,590
104108605070089	86	1,960	Bright	sS	6,793	-	SupplierStandard	3,590
104108606070089	86	1,960	Bright	zZ	6,793	-	SupplierStandard	3,590
104108605270089	86	1,960	Galvanized	sS	6,793	-	SupplierStandard	3,590
104108606270089	86	1,960	Galvanized	zZ	6,793	-	SupplierStandard	3,590
104108805050089	88	1,770	Bright	sS	6,423	-	SupplierStandard	3,759
104108806050089	88	1,770	Bright	zZ	6,423	-	SupplierStandard	3,759

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104108805250089	88	1,770	Galvanized	sS	6,423	-	SupplierStandard	3,759
104108806250089	88	1,770	Galvanized	zZ	6,423	-	SupplierStandard	3,759
104108805070089	88	1,960	Bright	sS	7,113	-	SupplierStandard	3,759
104108806070089	88	1,960	Bright	zZ	7,113	-	SupplierStandard	3,759
104108805270089	88	1,960	Galvanized	sS	7,113	-	SupplierStandard	3,759
104108806270089	88	1,960	Galvanized	zZ	7,113	-	SupplierStandard	3,759
104109005050089	90	1,770	Bright	sS	6,718	-	SupplierStandard	3,932
104109006050089	90	1,770	Bright	zZ	6,718	-	SupplierStandard	3,932
104109005250089	90	1,770	Galvanized	sS	6,718	-	SupplierStandard	3,932
104109006250089	90	1,770	Galvanized	zZ	6,718	-	SupplierStandard	3,932
104109005070089	90	1,960	Bright	sS	7,439	-	SupplierStandard	3,932
104109006070089	90	1,960	Bright	zZ	7,439	-	SupplierStandard	3,932
104109005270089	90	1,960	Galvanized	sS	7,439	-	SupplierStandard	3,932
104109006270089	90	1,960	Galvanized	zZ	7,439	-	SupplierStandard	3,932
104109205050089	92	1,770	Bright	sS	7,020	-	SupplierStandard	4,109
104109206050089	92	1,770	Bright	zZ	7,020	-	SupplierStandard	4,109
104109205250089	92	1,770	Galvanized	sS	7,020	-	SupplierStandard	4,109
104109206250089	92	1,770	Galvanized	zZ	7,020	-	SupplierStandard	4,109
104109205070089	92	1,960	Bright	sS	7,773	-	SupplierStandard	4,109
104109206070089	92	1,960	Bright	zZ	7,773	-	SupplierStandard	4,109
104109205270089	92	1,960	Galvanized	sS	7,773	-	SupplierStandard	4,109
104109206270089	92	1,960	Galvanized	zZ	7,773	-	SupplierStandard	4,109
104109405050089	94	1,770	Bright	sS	7,329	-	SupplierStandard	4,289
104109406050089	94	1,770	Bright	zZ	7,329	-	SupplierStandard	4,289
104109405250089	94	1,770	Galvanized	sS	7,329	-	SupplierStandard	4,289
104109406250089	94	1,770	Galvanized	zZ	7,329	-	SupplierStandard	4,289
104109405070089	94	1,960	Bright	sS	8,115	-	SupplierStandard	4,289
104109406070089	94	1,960	Bright	zZ	8,115	-	SupplierStandard	4,289
104109405270089	94	1,960	Galvanized	sS	8,115	-	SupplierStandard	4,289
104109406270089	94	1,960	Galvanized	zZ	8,115	-	SupplierStandard	4,289
104109605050089	96	1,770	Bright	sS	7,644	-	SupplierStandard	4,474

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104109606050089	96	1,770	Bright	zZ	7,644	-	SupplierStandard	4,474
104109605250089	96	1,770	Galvanized	sS	7,644	-	SupplierStandard	4,474
104109606250089	96	1,770	Galvanized	zZ	7,644	-	SupplierStandard	4,474
104109605070089	96	1,960	Bright	sS	8,464	-	SupplierStandard	4,474
104109606070089	96	1,960	Bright	zZ	8,464	-	SupplierStandard	4,474
104109605270089	96	1,960	Galvanized	sS	8,464	-	SupplierStandard	4,474
104109606270089	96	1,960	Galvanized	zZ	8,464	-	SupplierStandard	4,474
104109805050089	98	1,770	Bright	sS	7,965	-	SupplierStandard	4,662
104109806050089	98	1,770	Bright	zZ	7,965	-	SupplierStandard	4,662
104109805250089	98	1,770	Galvanized	sS	7,965	-	SupplierStandard	4,662
104109806250089	98	1,770	Galvanized	zZ	7,965	-	SupplierStandard	4,662
104109805070089	98	1,960	Bright	sS	8,820	-	SupplierStandard	4,662
104109806070089	98	1,960	Bright	zZ	8,820	-	SupplierStandard	4,662
104109805270089	98	1,960	Galvanized	sS	8,820	-	SupplierStandard	4,662
104109806270089	98	1,960	Galvanized	zZ	8,820	-	SupplierStandard	4,662
104110005050089	100	1,770	Bright	sS	8,294	-	SupplierStandard	4,854
104110006050089	100	1,770	Bright	zZ	8,294	-	SupplierStandard	4,854
104110005250089	100	1,770	Galvanized	sS	8,294	-	SupplierStandard	4,854
104110006250089	100	1,770	Galvanized	zZ	8,294	-	SupplierStandard	4,854
104110005070089	100	1,960	Bright	sS	9,184	-	SupplierStandard	4,854
104110006070089	100	1,960	Bright	zZ	9,184	-	SupplierStandard	4,854
104110005270089	100	1,960	Galvanized	sS	9,184	-	SupplierStandard	4,854
104110006270089	100	1,960	Galvanized	zZ	9,184	-	SupplierStandard	4,854
104110205050089	102	1,770	Bright	sS	8,629	-	SupplierStandard	5,050
104110206050089	102	1,770	Bright	zZ	8,629	-	SupplierStandard	5,050
104110205250089	102	1,770	Galvanized	sS	8,629	-	SupplierStandard	5,050
104110206250089	102	1,770	Galvanized	zZ	8,629	-	SupplierStandard	5,050
104110205070089	102	1,960	Bright	sS	9,555	-	SupplierStandard	5,050
104110206070089	102	1,960	Bright	zZ	9,555	-	SupplierStandard	5,050
104110205270089	102	1,960	Galvanized	sS	9,555	-	SupplierStandard	5,050
104110206270089	102	1,960	Galvanized	zZ	9,555	-	SupplierStandard	5,050

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104110405050089	104	1,770	Bright	sS	8,970	-	SupplierStandard	5,250
104110406050089	104	1,770	Bright	zZ	8,970	-	SupplierStandard	5,250
104110405250089	104	1,770	Galvanized	sS	8,970	-	SupplierStandard	5,250
104110406250089	104	1,770	Galvanized	zZ	8,970	-	SupplierStandard	5,250
104110405070089	104	1,960	Bright	sS	9,933	-	SupplierStandard	5,250
104110406070089	104	1,960	Bright	zZ	9,933	-	SupplierStandard	5,250
104110405270089	104	1,960	Galvanized	sS	9,933	-	SupplierStandard	5,250
104110406270089	104	1,960	Galvanized	zZ	9,933	-	SupplierStandard	5,250
104110605050089	106	1,770	Bright	sS	9,319	-	SupplierStandard	5,454
104110606050089	106	1,770	Bright	zZ	9,319	-	SupplierStandard	5,454
104110605250089	106	1,770	Galvanized	sS	9,319	-	SupplierStandard	5,454
104110606250089	106	1,770	Galvanized	zZ	9,319	-	SupplierStandard	5,454
104110605070089	106	1,960	Bright	sS	10,319	-	SupplierStandard	5,454
104110606070089	106	1,960	Bright	zZ	10,319	-	SupplierStandard	5,454
104110605270089	106	1,960	Galvanized	sS	10,319	-	SupplierStandard	5,454
104110606270089	106	1,960	Galvanized	zZ	10,319	-	SupplierStandard	5,454
104110805050089	108	1,770	Bright	sS	9,673	-	SupplierStandard	5,662
104110806050089	108	1,770	Bright	zZ	9,673	-	SupplierStandard	5,662
104110805250089	108	1,770	Galvanized	sS	9,673	-	SupplierStandard	5,662
104110806250089	108	1,770	Galvanized	zZ	9,673	-	SupplierStandard	5,662
104110805070089	108	1,960	Bright	sS	10,712	-	SupplierStandard	5,662
104110806070089	108	1,960	Bright	zZ	10,712	-	SupplierStandard	5,662
104110805270089	108	1,960	Galvanized	sS	10,712	-	SupplierStandard	5,662
104110806270089	108	1,960	Galvanized	zZ	10,712	-	SupplierStandard	5,662
104111005050089	110	1,770	Bright	sS	10,036	-	SupplierStandard	5,873
104111006050089	110	1,770	Bright	zZ	10,036	-	SupplierStandard	5,873
104111005250089	110	1,770	Galvanized	sS	10,036	-	SupplierStandard	5,873
104111006250089	110	1,770	Galvanized	zZ	10,036	-	SupplierStandard	5,873
104111005070089	110	1,960	Bright	sS	11,113	-	SupplierStandard	5,873
104111006070089	110	1,960	Bright	zZ	11,113	-	SupplierStandard	5,873
104111005270089	110	1,960	Galvanized	sS	11,113	-	SupplierStandard	5,873

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104111006270089	110	1,960	Galvanized	zZ	11,113	-	SupplierStandard	5,873
104111205050089	112	1,770	Bright	sS	10,404	-	SupplierStandard	6,089
104111206050089	112	1,770	Bright	zZ	10,404	-	SupplierStandard	6,089
104111205250089	112	1,770	Galvanized	sS	10,404	-	SupplierStandard	6,089
104111206250089	112	1,770	Galvanized	zZ	10,404	-	SupplierStandard	6,089
104111205070089	112	1,960	Bright	sS	11,520	-	SupplierStandard	6,089
104111206070089	112	1,960	Bright	zZ	11,520	-	SupplierStandard	6,089
104111205270089	112	1,960	Galvanized	sS	11,520	-	SupplierStandard	6,089
104111206270089	112	1,960	Galvanized	zZ	11,520	-	SupplierStandard	6,089
104111405050089	114	1,770	Bright	sS	10,779	-	SupplierStandard	6,308
104111406050089	114	1,770	Bright	zZ	10,779	-	SupplierStandard	6,308
104111405250089	114	1,770	Galvanized	sS	10,779	-	SupplierStandard	6,308
104111406250089	114	1,770	Galvanized	zZ	10,779	-	SupplierStandard	6,308
104111405070089	114	1,960	Bright	sS	11,953	-	SupplierStandard	6,308
104111406070089	114	1,960	Bright	zZ	11,953	-	SupplierStandard	6,308
104111405270089	114	1,960	Galvanized	sS	11,953	-	SupplierStandard	6,308
104111406270089	114	1,960	Galvanized	zZ	11,953	-	SupplierStandard	6,308
104111605050089	116	1,770	Bright	sS	11,160	-	SupplierStandard	6,532
104111606050089	116	1,770	Bright	zZ	11,160	-	SupplierStandard	6,532
104111605250089	116	1,770	Galvanized	sS	11,160	-	SupplierStandard	6,532
104111606250089	116	1,770	Galvanized	zZ	11,160	-	SupplierStandard	6,532
104111605070089	116	1,960	Bright	sS	12,358	-	SupplierStandard	6,532
104111606070089	116	1,960	Bright	zZ	12,358	-	SupplierStandard	6,532
104111605270089	116	1,960	Galvanized	sS	12,358	-	SupplierStandard	6,532
104111606270089	116	1,960	Galvanized	zZ	12,358	-	SupplierStandard	6,532
104111805050089	118	1,770	Bright	sS	11,548	-	SupplierStandard	6,759
104111806050089	118	1,770	Bright	zZ	11,548	-	SupplierStandard	6,759
104111805250089	118	1,770	Galvanized	sS	11,548	-	SupplierStandard	6,759
104111806250089	118	1,770	Galvanized	zZ	11,548	-	SupplierStandard	6,759
104111805070089	118	1,960	Bright	sS	12,778	-	SupplierStandard	6,759
104111806070089	118	1,960	Bright	zZ	12,778	-	SupplierStandard	6,759

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
104111805270089	118	1,960	Galvanized	sS	12,778	-	SupplierStandard	6,759
104111806270089	118	1,960	Galvanized	zZ	12,778	-	SupplierStandard	6,759
104112005050089	120	1,770	Bright	sS	11,943	-	SupplierStandard	6,990
104112006050089	120	1,770	Bright	zZ	11,943	-	SupplierStandard	6,990
104112005250089	120	1,770	Galvanized	sS	11,943	-	SupplierStandard	6,990
104112006250089	120	1,770	Galvanized	zZ	11,943	-	SupplierStandard	6,990
104112005070089	120	1,960	Bright	sS	13,225	-	SupplierStandard	6,990
104112006070089	120	1,960	Bright	zZ	13,225	-	SupplierStandard	6,990
104112005270089	120	1,960	Galvanized	sS	13,225	-	SupplierStandard	6,990
104112006270089	120	1,960	Galvanized	zZ	13,225	-	SupplierStandard	6,990