
Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Product information

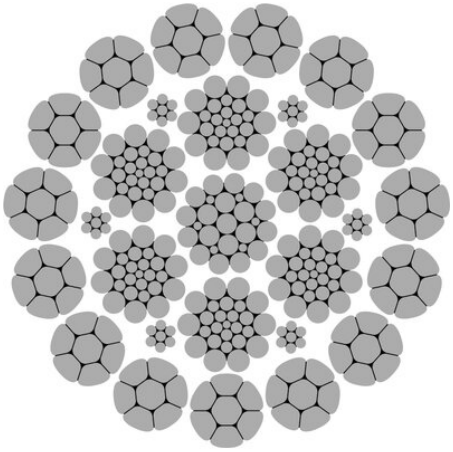

Diepa B55 is a rotation-resistant wire rope with compacted outer strands and with a high breaking force.

Applications: Tower cranes, hoisting rope for mobile cranes, telescopic cranes, crawlers, off-shore cranes, EOTs with a single fall, ship deck cranes, etc.
For multi-layer coiling on the drum.

Lay: Lang lay.
Total numbers of wires: ø6-10mm - **238**, 11-49mm - **328,** 50-99mm **- 549,** 100-120mm **1053.**
ISO 4309 Rope Category No: 4-49mm **RCN.23-2,** 50-99mm **RCN.27,** 100-120mm **RCN.31**

Optional: B50 - Ordinary Lay, B58 - Lang Lay with plastic insert, B53 - Ordinary Lay with plastic insert.
B55 from 72mm tensile strenght 2160 N/mm2 on request

... *Read more*

Marking: According to standard
Finish: Galvanized or bright.
Standard: EN 12385-4

Fill factor: 0.7145
RCN: 23-2

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104100605050089	6	1,770	Bright	sS	29.9	SupplierStandard	17
104100606050089	6	1,770	Bright	zZ	29.9	SupplierStandard	17
104100605250089	6	1,770	Galvanized	sS	29.9	SupplierStandard	17
104100606250089	6	1,770	Galvanized	zZ	29.9	SupplierStandard	17
104100605070089	6	1,960	Bright	sS	33.1	SupplierStandard	17
104100606070089	6	1,960	Bright	zZ	33.1	SupplierStandard	17
104100605270089	6	1,960	Galvanized	sS	33.1	SupplierStandard	17
104100606270089	6	1,960	Galvanized	zZ	33.1	SupplierStandard	17
104100605100089	6	2,160	Bright	sS	35.6	SupplierStandard	17
104100606100089	6	2,160	Bright	zZ	35.6	SupplierStandard	17
104100605300089	6	2,160	Galvanized	sS	35.6	SupplierStandard	17
104100606300089	6	2,160	Galvanized	zZ	35.6	SupplierStandard	17
104100805050089	8	1,770	Bright	sS	53.1	SupplierStandard	31
104100806050089	8	1,770	Bright	zZ	53.1	SupplierStandard	31
104100805250089	8	1,770	Galvanized	sS	53.1	SupplierStandard	31
104100806250089	8	1,770	Galvanized	zZ	53.1	SupplierStandard	31
104100805070089	8	1,960	Bright	sS	58.8	SupplierStandard	31
104100806070089	8	1,960	Bright	zZ	58.8	SupplierStandard	31
104100805270089	8	1,960	Galvanized	sS	58.8	SupplierStandard	31
104100806270089	8	1,960	Galvanized	zZ	58.8	SupplierStandard	31
104100805100089	8	2,160	Bright	sS	63.2	SupplierStandard	31
104100806100089	8	2,160	Bright	zZ	63.2	SupplierStandard	31
104100805300089	8	2,160	Galvanized	sS	63.2	SupplierStandard	31
104100806300089	8	2,160	Galvanized	zZ	63.2	SupplierStandard	31
104101005050089	10	1,770	Bright	sS	82.4	SupplierStandard	49
104101006050089	10	1,770	Bright	zZ	82.4	SupplierStandard	49
104101005250089	10	1,770	Galvanized	sS	82.4	SupplierStandard	49
104101006250089	10	1,770	Galvanized	zZ	82.4	SupplierStandard	49
104101005070089	10	1,960	Bright	sS	91.7	SupplierStandard	49
104101006070089	10	1,960	Bright	zZ	91.7	SupplierStandard	49
104101005270089	10	1,960	Galvanized	sS	91.7	SupplierStandard	49

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104101006270089	10	1,960	Galvanized	zZ	91.7	SupplierStandard	49
104101005100089	10	2,160	Bright	sS	98.6	SupplierStandard	49
104101006100089	10	2,160	Bright	zZ	98.6	SupplierStandard	49
104101005300089	10	2,160	Galvanized	sS	98.6	SupplierStandard	49
104101006300089	10	2,160	Galvanized	zZ	98.6	SupplierStandard	49
104101105050089	11	1,770	Bright	sS	101	SupplierStandard	59
104101106050089	11	1,770	Bright	zZ	101	SupplierStandard	59
104101105250089	11	1,770	Galvanized	sS	101	SupplierStandard	59
104101106250089	11	1,770	Galvanized	zZ	101	SupplierStandard	59
104101105070089	11	1,960	Bright	sS	112	SupplierStandard	59
104101106070089	11	1,960	Bright	zZ	112	SupplierStandard	59
104101105270089	11	1,960	Galvanized	sS	112	SupplierStandard	59
104101106270089	11	1,960	Galvanized	zZ	112	SupplierStandard	59
104101105100089	11	2,160	Bright	sS	120	SupplierStandard	59
104101106100089	11	2,160	Bright	zZ	120	SupplierStandard	59
104101105300089	11	2,160	Galvanized	sS	120	SupplierStandard	59
104101106300089	11	2,160	Galvanized	zZ	120	SupplierStandard	59
104101205050089	12	1,770	Bright	sS	119	SupplierStandard	70
104101206050089	12	1,770	Bright	zZ	119	SupplierStandard	70
104101205250089	12	1,770	Galvanized	sS	119	SupplierStandard	70
104101206250089	12	1,770	Galvanized	zZ	119	SupplierStandard	70
104101205070089	12	1,960	Bright	sS	132	SupplierStandard	70
104101206070089	12	1,960	Bright	zZ	132	SupplierStandard	70
104101205270089	12	1,960	Galvanized	sS	132	SupplierStandard	70
104101206270089	12	1,960	Galvanized	zZ	132	SupplierStandard	70
104101205100089	12	2,160	Bright	sS	142	SupplierStandard	70
104101206100089	12	2,160	Bright	zZ	142	SupplierStandard	70
104101205300089	12	2,160	Galvanized	sS	142	SupplierStandard	70
104101206300089	12	2,160	Galvanized	zZ	142	SupplierStandard	70
104101305050089	13	1,770	Bright	sS	141	SupplierStandard	83
104101306050089	13	1,770	Bright	zZ	141	SupplierStandard	83

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104101305250089	13	1,770	Galvanized	sS	141	SupplierStandard	83
104101306250089	13	1,770	Galvanized	zZ	141	SupplierStandard	83
104101305070089	13	1,960	Bright	sS	156	SupplierStandard	83
104101306070089	13	1,960	Bright	zZ	156	SupplierStandard	83
104101305270089	13	1,960	Galvanized	sS	156	SupplierStandard	83
104101306270089	13	1,960	Galvanized	zZ	156	SupplierStandard	83
104101305100089	13	2,160	Bright	sS	168	SupplierStandard	83
104101306100089	13	2,160	Bright	zZ	168	SupplierStandard	83
104101305300089	13	2,160	Galvanized	sS	168	SupplierStandard	83
104101306300089	13	2,160	Galvanized	zZ	168	SupplierStandard	83
104101405050089	14	1,770	Bright	sS	162	SupplierStandard	95
104101406050089	14	1,770	Bright	zZ	162	SupplierStandard	95
104101405250089	14	1,770	Galvanized	sS	162	SupplierStandard	95
104101406250089	14	1,770	Galvanized	zZ	162	SupplierStandard	95
104101405070089	14	1,960	Bright	sS	181	SupplierStandard	95
104101406070089	14	1,960	Bright	zZ	181	SupplierStandard	95
104101405270089	14	1,960	Galvanized	sS	181	SupplierStandard	95
104101406270089	14	1,960	Galvanized	zZ	181	SupplierStandard	95
104101405100089	14	2,160	Bright	sS	194	SupplierStandard	95
104101406100089	14	2,160	Bright	zZ	194	SupplierStandard	95
104101405300089	14	2,160	Galvanized	sS	194	SupplierStandard	95
104101406300089	14	2,160	Galvanized	zZ	194	SupplierStandard	95
104101505050089	15	1,770	Bright	sS	186	SupplierStandard	109
104101506050089	15	1,770	Bright	zZ	186	SupplierStandard	109
104101505250089	15	1,770	Galvanized	sS	186	SupplierStandard	109
104101506250089	15	1,770	Galvanized	zZ	186	SupplierStandard	109
104101505070089	15	1,960	Bright	sS	207	SupplierStandard	109
104101506070089	15	1,960	Bright	zZ	207	SupplierStandard	109
104101505270089	15	1,960	Galvanized	sS	207	SupplierStandard	109
104101506270089	15	1,960	Galvanized	zZ	207	SupplierStandard	109
104101505100089	15	2,160	Bright	sS	222	SupplierStandard	109

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104101506100089	15	2,160	Bright	zZ	222	SupplierStandard	109
104101505300089	15	2,160	Galvanized	sS	222	SupplierStandard	109
104101506300089	15	2,160	Galvanized	zZ	222	SupplierStandard	109
104101605050089	16	1,770	Bright	sS	214	SupplierStandard	126
104101606050089	16	1,770	Bright	zZ	214	SupplierStandard	126
104101605250089	16	1,770	Galvanized	sS	214	SupplierStandard	126
104101606250089	16	1,770	Galvanized	zZ	214	SupplierStandard	126
104101605070089	16	1,960	Bright	sS	238	SupplierStandard	126
104101606070089	16	1,960	Bright	zZ	238	SupplierStandard	126
104101605270089	16	1,960	Galvanized	sS	238	SupplierStandard	126
104101606270089	16	1,960	Galvanized	zZ	238	SupplierStandard	126
104101605100089	16	2,160	Bright	sS	256	SupplierStandard	126
104101606100089	16	2,160	Bright	zZ	256	SupplierStandard	126
104101605300089	16	2,160	Galvanized	sS	256	SupplierStandard	126
104101606300089	16	2,160	Galvanized	zZ	256	SupplierStandard	126
104101705050089	17	1,770	Bright	sS	240	SupplierStandard	141
104101706050089	17	1,770	Bright	zZ	240	SupplierStandard	141
104101705250089	17	1,770	Galvanized	sS	240	SupplierStandard	141
104101706250089	17	1,770	Galvanized	zZ	240	SupplierStandard	141
104101705070089	17	1,960	Bright	sS	267	SupplierStandard	141
104101706070089	17	1,960	Bright	zZ	267	SupplierStandard	141
104101705270089	17	1,960	Galvanized	sS	267	SupplierStandard	141
104101706270089	17	1,960	Galvanized	zZ	267	SupplierStandard	141
104101705100089	17	2,160	Bright	sS	287	SupplierStandard	141
104101706100089	17	2,160	Bright	zZ	287	SupplierStandard	141
104101705300089	17	2,160	Galvanized	sS	287	SupplierStandard	141
104101706300089	17	2,160	Galvanized	zZ	287	SupplierStandard	141
104101805050089	18	1,770	Bright	sS	271	SupplierStandard	159
104101806050089	18	1,770	Bright	zZ	271	SupplierStandard	159
104101805250089	18	1,770	Galvanized	sS	271	SupplierStandard	159
104101806250089	18	1,770	Galvanized	zZ	271	SupplierStandard	159

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104101805070089	18	1,960	Bright	sS	301	SupplierStandard	159
104101806070089	18	1,960	Bright	zZ	301	SupplierStandard	159
104101805270089	18	1,960	Galvanized	sS	301	SupplierStandard	159
104101806270089	18	1,960	Galvanized	zZ	301	SupplierStandard	159
104101805100089	18	2,160	Bright	sS	323	SupplierStandard	159
104101806100089	18	2,160	Bright	zZ	323	SupplierStandard	159
104101805300089	18	2,160	Galvanized	sS	323	SupplierStandard	159
104101806300089	18	2,160	Galvanized	zZ	323	SupplierStandard	159
104101905050089	19	1,770	Bright	sS	300	SupplierStandard	176
104101906050089	19	1,770	Bright	zZ	300	SupplierStandard	176
104101905250089	19	1,770	Galvanized	sS	300	SupplierStandard	176
104101906250089	19	1,770	Galvanized	zZ	300	SupplierStandard	176
104101905070089	19	1,960	Bright	sS	333	SupplierStandard	176
104101906070089	19	1,960	Bright	zZ	333	SupplierStandard	176
104101905270089	19	1,960	Galvanized	sS	333	SupplierStandard	176
104101906270089	19	1,960	Galvanized	zZ	333	SupplierStandard	176
104101905100089	19	2,160	Bright	sS	358	SupplierStandard	176
104101906100089	19	2,160	Bright	zZ	358	SupplierStandard	176
104101905300089	19	2,160	Galvanized	sS	358	SupplierStandard	176
104101906300089	19	2,160	Galvanized	zZ	358	SupplierStandard	176
104102005050089	20	1,770	Bright	sS	334	SupplierStandard	196
104102006050089	20	1,770	Bright	zZ	334	SupplierStandard	196
104102005250089	20	1,770	Galvanized	sS	334	SupplierStandard	196
104102006250089	20	1,770	Galvanized	zZ	334	SupplierStandard	196
104102005070089	20	1,960	Bright	sS	371	SupplierStandard	196
104102006070089	20	1,960	Bright	zZ	371	SupplierStandard	196
104102005270089	20	1,960	Galvanized	sS	371	SupplierStandard	196
104102006270089	20	1,960	Galvanized	zZ	371	SupplierStandard	196
104102005100089	20	2,160	Bright	sS	398	SupplierStandard	196
104102006100089	20	2,160	Bright	zZ	398	SupplierStandard	196
104102005300089	20	2,160	Galvanized	sS	398	SupplierStandard	196

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104102006300089	20	2,160	Galvanized	zZ	398	SupplierStandard	196
104102105050089	21	1,770	Bright	sS	371	SupplierStandard	218
104102106050089	21	1,770	Bright	zZ	371	SupplierStandard	218
104102105250089	21	1,770	Galvanized	sS	371	SupplierStandard	218
104102106250089	21	1,770	Galvanized	zZ	371	SupplierStandard	218
104102105070089	21	1,960	Bright	sS	412	SupplierStandard	218
104102106070089	21	1,960	Bright	zZ	412	SupplierStandard	218
104102105270089	21	1,960	Galvanized	sS	412	SupplierStandard	218
104102106270089	21	1,960	Galvanized	zZ	412	SupplierStandard	218
104102105100089	21	2,160	Bright	sS	442	SupplierStandard	218
104102106100089	21	2,160	Bright	zZ	442	SupplierStandard	218
104102105300089	21	2,160	Galvanized	sS	442	SupplierStandard	218
104102106300089	21	2,160	Galvanized	zZ	442	SupplierStandard	218
104102205050089	22	1,770	Bright	sS	406	SupplierStandard	238
104102206050089	22	1,770	Bright	zZ	406	SupplierStandard	238
104102205250089	22	1,770	Galvanized	sS	406	SupplierStandard	238
104102206250089	22	1,770	Galvanized	zZ	406	SupplierStandard	238
104102205070089	22	1,960	Bright	sS	451	SupplierStandard	238
104102206070089	22	1,960	Bright	zZ	451	SupplierStandard	238
104102205270089	22	1,960	Galvanized	sS	451	SupplierStandard	238
104102206270089	22	1,960	Galvanized	zZ	451	SupplierStandard	238
104102205100089	22	2,160	Bright	sS	485	SupplierStandard	238
104102206100089	22	2,160	Bright	zZ	485	SupplierStandard	238
104102205300089	22	2,160	Galvanized	sS	485	SupplierStandard	238
104102206300089	22	2,160	Galvanized	zZ	485	SupplierStandard	238
104102305050089	23	1,770	Bright	sS	442	SupplierStandard	260
104102306050089	23	1,770	Bright	zZ	442	SupplierStandard	260
104102305250089	23	1,770	Galvanized	sS	442	SupplierStandard	260
104102306250089	23	1,770	Galvanized	zZ	442	SupplierStandard	260
104102305070089	23	1,960	Bright	sS	491	SupplierStandard	260
104102306070089	23	1,960	Bright	zZ	491	SupplierStandard	260

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104102305270089	23	1,960	Galvanized	sS	491	SupplierStandard	260
104102306270089	23	1,960	Galvanized	zZ	491	SupplierStandard	260
104102305100089	23	2,160	Bright	sS	528	SupplierStandard	260
104102306100089	23	2,160	Bright	zZ	528	SupplierStandard	260
104102305300089	23	2,160	Galvanized	sS	528	SupplierStandard	260
104102306300089	23	2,160	Galvanized	zZ	528	SupplierStandard	260
104102405050089	24	1,770	Bright	sS	481	SupplierStandard	282
104102406050089	24	1,770	Bright	zZ	481	SupplierStandard	282
104102405250089	24	1,770	Galvanized	sS	481	SupplierStandard	282
104102406250089	24	1,770	Galvanized	zZ	481	SupplierStandard	282
104102405070089	24	1,960	Bright	sS	534	SupplierStandard	282
104102406070089	24	1,960	Bright	zZ	534	SupplierStandard	282
104102405270089	24	1,960	Galvanized	sS	534	SupplierStandard	282
104102406270089	24	1,960	Galvanized	zZ	534	SupplierStandard	282
104102405100089	24	2,160	Bright	sS	573	SupplierStandard	282
104102406100089	24	2,160	Bright	zZ	573	SupplierStandard	282
104102405300089	24	2,160	Galvanized	sS	573	SupplierStandard	282
104102406300089	24	2,160	Galvanized	zZ	573	SupplierStandard	282
104102505050089	25	1,770	Bright	sS	512	SupplierStandard	301
104102506050089	25	1,770	Bright	zZ	512	SupplierStandard	301
104102505250089	25	1,770	Galvanized	sS	512	SupplierStandard	301
104102506250089	25	1,770	Galvanized	zZ	512	SupplierStandard	301
104102505070089	25	1,960	Bright	sS	569	SupplierStandard	301
104102506070089	25	1,960	Bright	zZ	569	SupplierStandard	301
104102505270089	25	1,960	Galvanized	sS	569	SupplierStandard	301
104102506270089	25	1,960	Galvanized	zZ	569	SupplierStandard	301
104102505100089	25	2,160	Bright	sS	611	SupplierStandard	301
104102506100089	25	2,160	Bright	zZ	611	SupplierStandard	301
104102505300089	25	2,160	Galvanized	sS	611	SupplierStandard	301
104102506300089	25	2,160	Galvanized	zZ	611	SupplierStandard	301
104102605050089	26	1,770	Bright	sS	554	SupplierStandard	325

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104102606050089	26	1,770	Bright	zZ	554	SupplierStandard	325
104102605250089	26	1,770	Galvanized	sS	554	SupplierStandard	325
104102606250089	26	1,770	Galvanized	zZ	554	SupplierStandard	325
104102605070089	26	1,960	Bright	sS	616	SupplierStandard	325
104102606070089	26	1,960	Bright	zZ	616	SupplierStandard	325
104102605270089	26	1,960	Galvanized	sS	616	SupplierStandard	325
104102606270089	26	1,960	Galvanized	zZ	616	SupplierStandard	325
104102605100089	26	2,160	Bright	sS	661	SupplierStandard	325
104102606100089	26	2,160	Bright	zZ	661	SupplierStandard	325
104102605300089	26	2,160	Galvanized	sS	661	SupplierStandard	325
104102606300089	26	2,160	Galvanized	zZ	661	SupplierStandard	325
104102805050089	28	1,770	Bright	sS	652	SupplierStandard	383
104102806050089	28	1,770	Bright	zZ	652	SupplierStandard	383
104102805250089	28	1,770	Galvanized	sS	652	SupplierStandard	383
104102806250089	28	1,770	Galvanized	zZ	652	SupplierStandard	383
104102805070089	28	1,960	Bright	sS	725	SupplierStandard	383
104102806070089	28	1,960	Bright	zZ	725	SupplierStandard	383
104102805270089	28	1,960	Galvanized	sS	725	SupplierStandard	383
104102806270089	28	1,960	Galvanized	zZ	725	SupplierStandard	383
104102805100089	28	2,160	Bright	sS	778	SupplierStandard	383
104102806100089	28	2,160	Bright	zZ	778	SupplierStandard	383
104102805300089	28	2,160	Galvanized	sS	778	SupplierStandard	383
104102806300089	28	2,160	Galvanized	zZ	778	SupplierStandard	383
104103005050089	30	1,770	Bright	sS	740	SupplierStandard	434
104103006050089	30	1,770	Bright	zZ	740	SupplierStandard	434
104103005250089	30	1,770	Galvanized	sS	740	SupplierStandard	434
104103006250089	30	1,770	Galvanized	zZ	740	SupplierStandard	434
104103005070089	30	1,960	Bright	sS	822	SupplierStandard	434
104103006070089	30	1,960	Bright	zZ	822	SupplierStandard	434
104103005270089	30	1,960	Galvanized	sS	822	SupplierStandard	434
104103006270089	30	1,960	Galvanized	zZ	822	SupplierStandard	434

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104103005100089	30	2,160	Bright	sS	883	SupplierStandard	434
104103006100089	30	2,160	Bright	zZ	883	SupplierStandard	434
104103005300089	30	2,160	Galvanized	sS	883	SupplierStandard	434
104103006300089	30	2,160	Galvanized	zZ	883	SupplierStandard	434
104103205050089	32	1,770	Bright	sS	844	SupplierStandard	495
104103206050089	32	1,770	Bright	zZ	844	SupplierStandard	495
104103205250089	32	1,770	Galvanized	sS	844	SupplierStandard	495
104103206250089	32	1,770	Galvanized	zZ	844	SupplierStandard	495
104103205070089	32	1,960	Bright	sS	937	SupplierStandard	495
104103206070089	32	1,960	Bright	zZ	937	SupplierStandard	495
104103205270089	32	1,960	Galvanized	sS	937	SupplierStandard	495
104103206270089	32	1,960	Galvanized	zZ	937	SupplierStandard	495
104103205100089	32	2,160	Bright	sS	1,006	SupplierStandard	495
104103206100089	32	2,160	Bright	zZ	1,006	SupplierStandard	495
104103205300089	32	2,160	Galvanized	sS	1,006	SupplierStandard	495
104103206300089	32	2,160	Galvanized	zZ	1,006	SupplierStandard	495
104103405050089	34	1,770	Bright	sS	952	SupplierStandard	559
104103406050089	34	1,770	Bright	zZ	952	SupplierStandard	559
104103405250089	34	1,770	Galvanized	sS	952	SupplierStandard	559
104103406250089	34	1,770	Galvanized	zZ	952	SupplierStandard	559
104103405070089	34	1,960	Bright	sS	1,058	SupplierStandard	559
104103406070089	34	1,960	Bright	zZ	1,058	SupplierStandard	559
104103405270089	34	1,960	Galvanized	sS	1,058	SupplierStandard	559
104103406270089	34	1,960	Galvanized	zZ	1,058	SupplierStandard	559
104103405100089	34	2,160	Bright	sS	1,136	SupplierStandard	559
104103406100089	34	2,160	Bright	zZ	1,136	SupplierStandard	559
104103405300089	34	2,160	Galvanized	sS	1,136	SupplierStandard	559
104103406300089	34	2,160	Galvanized	zZ	1,136	SupplierStandard	559
104103605050089	36	1,770	Bright	sS	1,072	SupplierStandard	629
104103606050089	36	1,770	Bright	zZ	1,072	SupplierStandard	629
104103605250089	36	1,770	Galvanized	sS	1,072	SupplierStandard	629

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104103606250089	36	1,770	Galvanized	zZ	1,072	SupplierStandard	629
104103605070089	36	1,960	Bright	sS	1,191	SupplierStandard	629
104103606070089	36	1,960	Bright	zZ	1,191	SupplierStandard	629
104103605270089	36	1,960	Galvanized	sS	1,191	SupplierStandard	629
104103606270089	36	1,960	Galvanized	zZ	1,191	SupplierStandard	629
104103605100089	36	2,160	Bright	sS	1,279	SupplierStandard	629
104103606100089	36	2,160	Bright	zZ	1,279	SupplierStandard	629
104103605300089	36	2,160	Galvanized	sS	1,279	SupplierStandard	629
104103606300089	36	2,160	Galvanized	zZ	1,279	SupplierStandard	629
104103805050089	38	1,770	Bright	sS	1,194	SupplierStandard	701
104103806050089	38	1,770	Bright	zZ	1,194	SupplierStandard	701
104103805250089	38	1,770	Galvanized	sS	1,194	SupplierStandard	701
104103806250089	38	1,770	Galvanized	zZ	1,194	SupplierStandard	701
104103805070089	38	1,960	Bright	sS	1,327	SupplierStandard	701
104103806070089	38	1,960	Bright	zZ	1,327	SupplierStandard	701
104103805270089	38	1,960	Galvanized	sS	1,327	SupplierStandard	701
104103806270089	38	1,960	Galvanized	zZ	1,327	SupplierStandard	701
104103805100089	38	2,160	Bright	sS	1,425	SupplierStandard	701
104103806100089	38	2,160	Bright	zZ	1,425	SupplierStandard	701
104103805300089	38	2,160	Galvanized	sS	1,425	SupplierStandard	701
104103806300089	38	2,160	Galvanized	zZ	1,425	SupplierStandard	701
104104005050089	40	1,770	Bright	sS	1,323	SupplierStandard	777
104104006050089	40	1,770	Bright	zZ	1,323	SupplierStandard	777
104104005250089	40	1,770	Galvanized	sS	1,323	SupplierStandard	777
104104006250089	40	1,770	Galvanized	zZ	1,323	SupplierStandard	777
104104005070089	40	1,960	Bright	sS	1,471	SupplierStandard	777
104104006070089	40	1,960	Bright	zZ	1,471	SupplierStandard	777
104104005270089	40	1,960	Galvanized	sS	1,471	SupplierStandard	777
104104006270089	40	1,960	Galvanized	zZ	1,471	SupplierStandard	777
104104005100089	40	2,160	Bright	sS	1,579	SupplierStandard	777
104104006100089	40	2,160	Bright	zZ	1,579	SupplierStandard	777

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104104005300089	40	2,160	Galvanized	sS	1,579	SupplierStandard	777
104104006300089	40	2,160	Galvanized	zZ	1,579	SupplierStandard	777
104104205050089	42	1,770	Bright	sS	1,459	SupplierStandard	856
104104206050089	42	1,770	Bright	zZ	1,459	SupplierStandard	856
104104205250089	42	1,770	Galvanized	sS	1,459	SupplierStandard	856
104104206250089	42	1,770	Galvanized	zZ	1,459	SupplierStandard	856
104104205070089	42	1,960	Bright	sS	1,621	SupplierStandard	856
104104206070089	42	1,960	Bright	zZ	1,621	SupplierStandard	856
104104205270089	42	1,960	Galvanized	sS	1,621	SupplierStandard	856
104104206270089	42	1,960	Galvanized	zZ	1,621	SupplierStandard	856
104104205100089	42	2,160	Bright	sS	1,741	SupplierStandard	856
104104206100089	42	2,160	Bright	zZ	1,741	SupplierStandard	856
104104205300089	42	2,160	Galvanized	sS	1,741	SupplierStandard	856
104104206300089	42	2,160	Galvanized	zZ	1,741	SupplierStandard	856
104104405050089	44	1,770	Bright	sS	1,601	SupplierStandard	940
104104406050089	44	1,770	Bright	zZ	1,601	SupplierStandard	940
104104405250089	44	1,770	Galvanized	sS	1,601	SupplierStandard	940
104104406250089	44	1,770	Galvanized	zZ	1,601	SupplierStandard	940
104104406300089	44	2,160	Galvanized	zZ	1,741	SupplierStandard	940
104104405070089	44	1,960	Bright	sS	1,780	SupplierStandard	940
104104406070089	44	1,960	Bright	zZ	1,780	SupplierStandard	940
104104405270089	44	1,960	Galvanized	sS	1,780	SupplierStandard	940
104104406270089	44	1,960	Galvanized	zZ	1,780	SupplierStandard	940
104104405100089	44	2,160	Bright	sS	1,910	SupplierStandard	940
104104406100089	44	2,160	Bright	zZ	1,910	SupplierStandard	940
104104405300089	44	2,160	Galvanized	sS	1,910	SupplierStandard	940
104104605050089	46	1,770	Bright	sS	1,750	SupplierStandard	1,027
104104606050089	46	1,770	Bright	zZ	1,750	SupplierStandard	1,027
104104605250089	46	1,770	Galvanized	sS	1,750	SupplierStandard	1,027
104104606250089	46	1,770	Galvanized	zZ	1,750	SupplierStandard	1,027
104104605070089	46	1,960	Bright	sS	1,945	SupplierStandard	1,027

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104104606070089	46	1,960	Bright	zZ	1,945	SupplierStandard	1,027
104104605270089	46	1,960	Galvanized	sS	1,945	SupplierStandard	1,027
104104606270089	46	1,960	Galvanized	zZ	1,945	SupplierStandard	1,027
104104605100089	46	2,160	Bright	sS	2,088	SupplierStandard	1,027
104104606100089	46	2,160	Bright	zZ	2,088	SupplierStandard	1,027
104104605300089	46	2,160	Galvanized	sS	2,088	SupplierStandard	1,027
104104606300089	46	2,160	Galvanized	zZ	2,088	SupplierStandard	1,027
104104805050089	48	1,770	Bright	sS	1,906	SupplierStandard	1,118
104104806050089	48	1,770	Bright	zZ	1,906	SupplierStandard	1,118
104104805250089	48	1,770	Galvanized	sS	1,906	SupplierStandard	1,118
104104806250089	48	1,770	Galvanized	zZ	1,906	SupplierStandard	1,118
104104805070089	48	1,960	Bright	sS	2,117	SupplierStandard	1,118
104104806070089	48	1,960	Bright	zZ	2,117	SupplierStandard	1,118
104104805270089	48	1,960	Galvanized	sS	2,117	SupplierStandard	1,118
104104806270089	48	1,960	Galvanized	zZ	2,117	SupplierStandard	1,118
104104805100089	48	2,160	Bright	sS	2,273	SupplierStandard	1,118
104104806100089	48	2,160	Bright	zZ	2,273	SupplierStandard	1,118
104104805300089	48	2,160	Galvanized	sS	2,273	SupplierStandard	1,118
104104806300089	48	2,160	Galvanized	zZ	2,273	SupplierStandard	1,118
104105005050089	50	1,770	Bright	sS	2,068	SupplierStandard	1,214
104105006050089	50	1,770	Bright	zZ	2,068	SupplierStandard	1,214
104105005250089	50	1,770	Galvanized	sS	2,068	SupplierStandard	1,214
104105006250089	50	1,770	Galvanized	zZ	2,068	SupplierStandard	1,214
104105005070089	50	1,960	Bright	sS	2,298	SupplierStandard	1,214
104105006070089	50	1,960	Bright	zZ	2,298	SupplierStandard	1,214
104105005270089	50	1,960	Galvanized	sS	2,298	SupplierStandard	1,214
104105006270089	50	1,960	Galvanized	zZ	2,298	SupplierStandard	1,214
104105005100089	50	2,160	Bright	sS	2,467	SupplierStandard	1,214
104105006100089	50	2,160	Bright	zZ	2,467	SupplierStandard	1,214
104105005300089	50	2,160	Galvanized	sS	2,467	SupplierStandard	1,214
104105006300089	50	2,160	Galvanized	zZ	2,467	SupplierStandard	1,214

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104105205050089	52	1,770	Bright	sS	2,237	SupplierStandard	1,313
104105206050089	52	1,770	Bright	zZ	2,237	SupplierStandard	1,313
104105205250089	52	1,770	Galvanized	sS	2,237	SupplierStandard	1,313
104105206250089	52	1,770	Galvanized	zZ	2,237	SupplierStandard	1,313
104105205070089	52	1,960	Bright	sS	2,485	SupplierStandard	1,313
104105206070089	52	1,960	Bright	zZ	2,485	SupplierStandard	1,313
104105205270089	52	1,960	Galvanized	sS	2,485	SupplierStandard	1,313
104105206270089	52	1,960	Galvanized	zZ	2,485	SupplierStandard	1,313
104105205100089	52	2,160	Bright	sS	2,668	SupplierStandard	1,313
104105206100089	52	2,160	Bright	zZ	2,668	SupplierStandard	1,313
104105205300089	52	2,160	Galvanized	sS	2,668	SupplierStandard	1,313
104105206300089	52	2,160	Galvanized	zZ	2,668	SupplierStandard	1,313
104105405050089	54	1,770	Bright	sS	2,412	SupplierStandard	1,415
104105406050089	54	1,770	Bright	zZ	2,412	SupplierStandard	1,415
104105405250089	54	1,770	Galvanized	sS	2,412	SupplierStandard	1,415
104105406250089	54	1,770	Galvanized	zZ	2,412	SupplierStandard	1,415
104105405070089	54	1,960	Bright	sS	2,681	SupplierStandard	1,415
104105406070089	54	1,960	Bright	zZ	2,681	SupplierStandard	1,415
104105405270089	54	1,960	Galvanized	sS	2,681	SupplierStandard	1,415
104105406270089	54	1,960	Galvanized	zZ	2,681	SupplierStandard	1,415
104105405100089	54	2,160	Bright	sS	2,878	SupplierStandard	1,415
104105406100089	54	2,160	Bright	zZ	2,878	SupplierStandard	1,415
104105405300089	54	2,160	Galvanized	sS	2,878	SupplierStandard	1,415
104105406300089	54	2,160	Galvanized	zZ	2,878	SupplierStandard	1,415
104105605050089	56	1,770	Bright	sS	2,594	SupplierStandard	1,522
104105606050089	56	1,770	Bright	zZ	2,594	SupplierStandard	1,522
104105605250089	56	1,770	Galvanized	sS	2,594	SupplierStandard	1,522
104105606250089	56	1,770	Galvanized	zZ	2,594	SupplierStandard	1,522
104105605070089	56	1,960	Bright	sS	2,883	SupplierStandard	1,522
104105606070089	56	1,960	Bright	zZ	2,883	SupplierStandard	1,522
104105605270089	56	1,960	Galvanized	sS	2,883	SupplierStandard	1,522

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104105606270089	56	1,960	Galvanized	zZ	2,883	SupplierStandard	1,522
104105605100089	56	2,160	Bright	sS	3,095	SupplierStandard	1,522
104105606100089	56	2,160	Bright	zZ	3,095	SupplierStandard	1,522
104105605300089	56	2,160	Galvanized	sS	3,095	SupplierStandard	1,522
104105606300089	56	2,160	Galvanized	zZ	3,095	SupplierStandard	1,522
104105805050089	58	1,770	Bright	sS	2,790	SupplierStandard	1,633
104105806050089	58	1,770	Bright	zZ	2,790	SupplierStandard	1,633
104105805250089	58	1,770	Galvanized	sS	2,790	SupplierStandard	1,633
104105806250089	58	1,770	Galvanized	zZ	2,790	SupplierStandard	1,633
104105805070089	58	1,960	Bright	sS	3,090	SupplierStandard	1,633
104105806070089	58	1,960	Bright	zZ	3,090	SupplierStandard	1,633
104105805270089	58	1,960	Galvanized	sS	3,090	SupplierStandard	1,633
104105806270089	58	1,960	Galvanized	zZ	3,090	SupplierStandard	1,633
104105805100089	58	2,160	Bright	sS	3,324	SupplierStandard	1,633
104105806100089	58	2,160	Bright	zZ	3,324	SupplierStandard	1,633
104105805300089	58	2,160	Galvanized	sS	3,324	SupplierStandard	1,633
104105806300089	58	2,160	Galvanized	zZ	3,324	SupplierStandard	1,633
104106005050089	60	1,770	Bright	sS	2,986	SupplierStandard	1,747
104106006050089	60	1,770	Bright	zZ	2,986	SupplierStandard	1,747
104106005250089	60	1,770	Galvanized	sS	2,986	SupplierStandard	1,747
104106006250089	60	1,770	Galvanized	zZ	2,986	SupplierStandard	1,747
104106005070089	60	1,960	Bright	sS	3,307	SupplierStandard	1,747
104106006070089	60	1,960	Bright	zZ	3,307	SupplierStandard	1,747
104106005270089	60	1,960	Galvanized	sS	3,307	SupplierStandard	1,747
104106006270089	60	1,960	Galvanized	zZ	3,307	SupplierStandard	1,747
104106005100089	60	2,160	Bright	sS	3,557	SupplierStandard	1,747
104106006100089	60	2,160	Bright	zZ	3,557	SupplierStandard	1,747
104106005300089	60	2,160	Galvanized	sS	3,557	SupplierStandard	1,747
104106006300089	60	2,160	Galvanized	zZ	3,557	SupplierStandard	1,747
104106205050089	62	1,770	Bright	sS	3,188	SupplierStandard	1,866
104106206050089	62	1,770	Bright	zZ	3,188	SupplierStandard	1,866

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104106205250089	62	1,770	Galvanized	sS	3,188	SupplierStandard	1,866
104106206250089	62	1,770	Galvanized	zZ	3,188	SupplierStandard	1,866
104106205070089	62	1,960	Bright	sS	3,530	SupplierStandard	1,866
104106206070089	62	1,960	Bright	zZ	3,530	SupplierStandard	1,866
104106205270089	62	1,960	Galvanized	sS	3,530	SupplierStandard	1,866
104106206270089	62	1,960	Galvanized	zZ	3,530	SupplierStandard	1,866
104106205100089	62	2,160	Bright	sS	3,797	SupplierStandard	1,866
104106206100089	62	2,160	Bright	zZ	3,797	SupplierStandard	1,866
104106205300089	62	2,160	Galvanized	sS	3,797	SupplierStandard	1,866
104106206300089	62	2,160	Galvanized	zZ	3,797	SupplierStandard	1,866
104106405050089	64	1,770	Bright	sS	3,397	SupplierStandard	1,988
104106406050089	64	1,770	Bright	zZ	3,397	SupplierStandard	1,988
104106405250089	64	1,770	Galvanized	sS	3,397	SupplierStandard	1,988
104106406250089	64	1,770	Galvanized	zZ	3,397	SupplierStandard	1,988
104106405070089	64	1,960	Bright	sS	3,762	SupplierStandard	1,988
104106406070089	64	1,960	Bright	zZ	3,762	SupplierStandard	1,988
104106405270089	64	1,960	Galvanized	sS	3,762	SupplierStandard	1,988
104106406270089	64	1,960	Galvanized	zZ	3,762	SupplierStandard	1,988
104106405100089	64	2,160	Bright	sS	4,046	SupplierStandard	1,988
104106406100089	64	2,160	Bright	zZ	4,046	SupplierStandard	1,988
104106405300089	64	2,160	Galvanized	sS	4,046	SupplierStandard	1,988
104106406300089	64	2,160	Galvanized	zZ	4,046	SupplierStandard	1,988
104106605050089	66	1,770	Bright	sS	3,613	SupplierStandard	2,114
104106606050089	66	1,770	Bright	zZ	3,613	SupplierStandard	2,114
104106605250089	66	1,770	Galvanized	sS	3,613	SupplierStandard	2,114
104106606250089	66	1,770	Galvanized	zZ	3,613	SupplierStandard	2,114
104106605070089	66	1,960	Bright	sS	4,000	SupplierStandard	2,114
104106606070089	66	1,960	Bright	zZ	4,000	SupplierStandard	2,114
104106605270089	66	1,960	Galvanized	sS	4,000	SupplierStandard	2,114
104106606270089	66	1,960	Galvanized	zZ	4,000	SupplierStandard	2,114
104106605100089	66	2,160	Bright	sS	4,303	SupplierStandard	2,114

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104106606100089	66	2,160	Bright	zZ	4,303	SupplierStandard	2,114
104106605300089	66	2,160	Galvanized	sS	4,303	SupplierStandard	2,114
104106606300089	66	2,160	Galvanized	zZ	4,303	SupplierStandard	2,114
104106805050089	68	1,770	Bright	sS	3,825	SupplierStandard	2,245
104106806050089	68	1,770	Bright	zZ	3,825	SupplierStandard	2,245
104106805250089	68	1,770	Galvanized	sS	3,825	SupplierStandard	2,245
104106806250089	68	1,770	Galvanized	zZ	3,825	SupplierStandard	2,245
104106805070089	68	1,960	Bright	sS	4,247	SupplierStandard	2,245
104106806070089	68	1,960	Bright	zZ	4,247	SupplierStandard	2,245
104106805270089	68	1,960	Galvanized	sS	4,247	SupplierStandard	2,245
104106806270089	68	1,960	Galvanized	zZ	4,247	SupplierStandard	2,245
104106805100089	68	2,160	Bright	sS	4,568	SupplierStandard	2,245
104106806100089	68	2,160	Bright	zZ	4,568	SupplierStandard	2,245
104106805300089	68	2,160	Galvanized	sS	4,568	SupplierStandard	2,245
104106806300089	68	2,160	Galvanized	zZ	4,568	SupplierStandard	2,245
104107005050089	70	1,770	Bright	sS	4,064	SupplierStandard	2,379
104107006050089	70	1,770	Bright	zZ	4,064	SupplierStandard	2,379
104107005250089	70	1,770	Galvanized	sS	4,064	SupplierStandard	2,379
104107006250089	70	1,770	Galvanized	zZ	4,064	SupplierStandard	2,379
104107005070089	70	1,960	Bright	sS	4,500	SupplierStandard	2,379
104107006070089	70	1,960	Bright	zZ	4,500	SupplierStandard	2,379
104107005270089	70	1,960	Galvanized	sS	4,500	SupplierStandard	2,379
104107006270089	70	1,960	Galvanized	zZ	4,500	SupplierStandard	2,379
104107005100089	70	2,160	Bright	sS	4,840	SupplierStandard	2,379
104107006100089	70	2,160	Bright	zZ	4,840	SupplierStandard	2,379
104107005300089	70	2,160	Galvanized	sS	4,840	SupplierStandard	2,379
104107006300089	70	2,160	Galvanized	zZ	4,840	SupplierStandard	2,379
104107205050089	72	1,770	Bright	sS	4,299	SupplierStandard	2,516
104107206050089	72	1,770	Bright	zZ	4,299	SupplierStandard	2,516
104107205250089	72	1,770	Galvanized	sS	4,299	SupplierStandard	2,516
104107206250089	72	1,770	Galvanized	zZ	4,299	SupplierStandard	2,516

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104107205070089	72	1,960	Bright	sS	4,761	SupplierStandard	2,516
104107206070089	72	1,960	Bright	zZ	4,761	SupplierStandard	2,516
104107205270089	72	1,960	Galvanized	sS	4,761	SupplierStandard	2,516
104107206270089	72	1,960	Galvanized	zZ	4,761	SupplierStandard	2,516
104107405050089	74	1,770	Bright	sS	4,542	SupplierStandard	2,658
104107406050089	74	1,770	Bright	zZ	4,542	SupplierStandard	2,658
104107405250089	74	1,770	Galvanized	sS	4,542	SupplierStandard	2,658
104107406250089	74	1,770	Galvanized	zZ	4,542	SupplierStandard	2,658
104107405070089	74	1,960	Bright	sS	5,029	SupplierStandard	2,658
104107406070089	74	1,960	Bright	zZ	5,029	SupplierStandard	2,658
104107405270089	74	1,960	Galvanized	sS	5,029	SupplierStandard	2,658
104107406270089	74	1,960	Galvanized	zZ	5,029	SupplierStandard	2,658
104107605070089	76	1,960	Bright	sS	4,761	SupplierStandard	2,804
104107605050089	76	1,770	Bright	sS	4,790	SupplierStandard	2,804
104107606050089	76	1,770	Bright	zZ	4,790	SupplierStandard	2,804
104107605250089	76	1,770	Galvanized	sS	4,790	SupplierStandard	2,804
104107606250089	76	1,770	Galvanized	zZ	4,790	SupplierStandard	2,804
104107606070089	76	1,960	Bright	zZ	5,305	SupplierStandard	2,804
104107605270089	76	1,960	Galvanized	sS	5,305	SupplierStandard	2,804
104107606270089	76	1,960	Galvanized	zZ	5,305	SupplierStandard	2,804
104107805050089	78	1,770	Bright	sS	5,046	SupplierStandard	2,953
104107806050089	78	1,770	Bright	zZ	5,046	SupplierStandard	2,953
104107805250089	78	1,770	Galvanized	sS	5,046	SupplierStandard	2,953
104107806250089	78	1,770	Galvanized	zZ	5,046	SupplierStandard	2,953
104107805070089	78	1,960	Bright	sS	5,588	SupplierStandard	2,953
104107806070089	78	1,960	Bright	zZ	5,588	SupplierStandard	2,953
104107805270089	78	1,960	Galvanized	sS	5,588	SupplierStandard	2,953
104107806270089	78	1,960	Galvanized	zZ	5,588	SupplierStandard	2,953
104108005050089	80	1,770	Bright	sS	5,308	SupplierStandard	3,107
104108006050089	80	1,770	Bright	zZ	5,308	SupplierStandard	3,107
104108005250089	80	1,770	Galvanized	sS	5,308	SupplierStandard	3,107

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104108006250089	80	1,770	Galvanized	zZ	5,308	SupplierStandard	3,107
104108005070089	80	1,960	Bright	sS	5,878	SupplierStandard	3,107
104108006070089	80	1,960	Bright	zZ	5,878	SupplierStandard	3,107
104108005270089	80	1,960	Galvanized	sS	5,878	SupplierStandard	3,107
104108006270089	80	1,960	Galvanized	zZ	5,878	SupplierStandard	3,107
104108205050089	82	1,770	Bright	sS	5,577	SupplierStandard	3,264
104108206050089	82	1,770	Bright	zZ	5,577	SupplierStandard	3,264
104108205250089	82	1,770	Galvanized	sS	5,577	SupplierStandard	3,264
104108206250089	82	1,770	Galvanized	zZ	5,577	SupplierStandard	3,264
104108205070089	82	1,960	Bright	sS	6,176	SupplierStandard	3,264
104108206070089	82	1,960	Bright	zZ	6,176	SupplierStandard	3,264
104108205270089	82	1,960	Galvanized	sS	6,176	SupplierStandard	3,264
104108206270089	82	1,960	Galvanized	zZ	6,176	SupplierStandard	3,264
104108405050089	84	1,770	Bright	sS	5,852	SupplierStandard	3,425
104108406050089	84	1,770	Bright	zZ	5,852	SupplierStandard	3,425
104108405250089	84	1,770	Galvanized	sS	5,852	SupplierStandard	3,425
104108406250089	84	1,770	Galvanized	zZ	5,852	SupplierStandard	3,425
104108405070089	84	1,960	Bright	sS	6,480	SupplierStandard	3,425
104108406070089	84	1,960	Bright	zZ	6,480	SupplierStandard	3,425
104108405270089	84	1,960	Galvanized	sS	6,480	SupplierStandard	3,425
104108406270089	84	1,960	Galvanized	zZ	6,480	SupplierStandard	3,425
104108605050089	86	1,770	Bright	sS	6,134	SupplierStandard	3,590
104108606050089	86	1,770	Bright	zZ	6,134	SupplierStandard	3,590
104108605250089	86	1,770	Galvanized	sS	6,134	SupplierStandard	3,590
104108606250089	86	1,770	Galvanized	zZ	6,134	SupplierStandard	3,590
104108605070089	86	1,960	Bright	sS	6,793	SupplierStandard	3,590
104108606070089	86	1,960	Bright	zZ	6,793	SupplierStandard	3,590
104108605270089	86	1,960	Galvanized	sS	6,793	SupplierStandard	3,590
104108606270089	86	1,960	Galvanized	zZ	6,793	SupplierStandard	3,590
104108805050089	88	1,770	Bright	sS	6,423	SupplierStandard	3,759
104108806050089	88	1,770	Bright	zZ	6,423	SupplierStandard	3,759

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104108805250089	88	1,770	Galvanized	sS	6,423	SupplierStandard	3,759
104108806250089	88	1,770	Galvanized	zZ	6,423	SupplierStandard	3,759
104108805070089	88	1,960	Bright	sS	7,113	SupplierStandard	3,759
104108806070089	88	1,960	Bright	zZ	7,113	SupplierStandard	3,759
104108805270089	88	1,960	Galvanized	sS	7,113	SupplierStandard	3,759
104108806270089	88	1,960	Galvanized	zZ	7,113	SupplierStandard	3,759
104109005050089	90	1,770	Bright	sS	6,718	SupplierStandard	3,932
104109006050089	90	1,770	Bright	zZ	6,718	SupplierStandard	3,932
104109005250089	90	1,770	Galvanized	sS	6,718	SupplierStandard	3,932
104109006250089	90	1,770	Galvanized	zZ	6,718	SupplierStandard	3,932
104109005070089	90	1,960	Bright	sS	7,439	SupplierStandard	3,932
104109006070089	90	1,960	Bright	zZ	7,439	SupplierStandard	3,932
104109005270089	90	1,960	Galvanized	sS	7,439	SupplierStandard	3,932
104109006270089	90	1,960	Galvanized	zZ	7,439	SupplierStandard	3,932
104109205050089	92	1,770	Bright	sS	7,020	SupplierStandard	4,109
104109206050089	92	1,770	Bright	zZ	7,020	SupplierStandard	4,109
104109205250089	92	1,770	Galvanized	sS	7,020	SupplierStandard	4,109
104109206250089	92	1,770	Galvanized	zZ	7,020	SupplierStandard	4,109
104109205070089	92	1,960	Bright	sS	7,773	SupplierStandard	4,109
104109206070089	92	1,960	Bright	zZ	7,773	SupplierStandard	4,109
104109205270089	92	1,960	Galvanized	sS	7,773	SupplierStandard	4,109
104109206270089	92	1,960	Galvanized	zZ	7,773	SupplierStandard	4,109
104109405050089	94	1,770	Bright	sS	7,329	SupplierStandard	4,289
104109406050089	94	1,770	Bright	zZ	7,329	SupplierStandard	4,289
104109405250089	94	1,770	Galvanized	sS	7,329	SupplierStandard	4,289
104109406250089	94	1,770	Galvanized	zZ	7,329	SupplierStandard	4,289
104109405070089	94	1,960	Bright	sS	8,115	SupplierStandard	4,289
104109406070089	94	1,960	Bright	zZ	8,115	SupplierStandard	4,289
104109405270089	94	1,960	Galvanized	sS	8,115	SupplierStandard	4,289
104109406270089	94	1,960	Galvanized	zZ	8,115	SupplierStandard	4,289
104109605050089	96	1,770	Bright	sS	7,644	SupplierStandard	4,474

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104109606050089	96	1,770	Bright	zZ	7,644	SupplierStandard	4,474
104109605250089	96	1,770	Galvanized	sS	7,644	SupplierStandard	4,474
104109606250089	96	1,770	Galvanized	zZ	7,644	SupplierStandard	4,474
104109605070089	96	1,960	Bright	sS	8,464	SupplierStandard	4,474
104109606070089	96	1,960	Bright	zZ	8,464	SupplierStandard	4,474
104109605270089	96	1,960	Galvanized	sS	8,464	SupplierStandard	4,474
104109606270089	96	1,960	Galvanized	zZ	8,464	SupplierStandard	4,474
104109805050089	98	1,770	Bright	sS	7,965	SupplierStandard	4,662
104109806050089	98	1,770	Bright	zZ	7,965	SupplierStandard	4,662
104109805250089	98	1,770	Galvanized	sS	7,965	SupplierStandard	4,662
104109806250089	98	1,770	Galvanized	zZ	7,965	SupplierStandard	4,662
104109805070089	98	1,960	Bright	sS	8,820	SupplierStandard	4,662
104109806070089	98	1,960	Bright	zZ	8,820	SupplierStandard	4,662
104109805270089	98	1,960	Galvanized	sS	8,820	SupplierStandard	4,662
104109806270089	98	1,960	Galvanized	zZ	8,820	SupplierStandard	4,662
104110005050089	100	1,770	Bright	sS	8,294	SupplierStandard	4,854
104110006050089	100	1,770	Bright	zZ	8,294	SupplierStandard	4,854
104110005250089	100	1,770	Galvanized	sS	8,294	SupplierStandard	4,854
104110006250089	100	1,770	Galvanized	zZ	8,294	SupplierStandard	4,854
104110005070089	100	1,960	Bright	sS	9,184	SupplierStandard	4,854
104110006070089	100	1,960	Bright	zZ	9,184	SupplierStandard	4,854
104110005270089	100	1,960	Galvanized	sS	9,184	SupplierStandard	4,854
104110006270089	100	1,960	Galvanized	zZ	9,184	SupplierStandard	4,854
104110205050089	102	1,770	Bright	sS	8,629	SupplierStandard	5,050
104110206050089	102	1,770	Bright	zZ	8,629	SupplierStandard	5,050
104110205250089	102	1,770	Galvanized	sS	8,629	SupplierStandard	5,050
104110206250089	102	1,770	Galvanized	zZ	8,629	SupplierStandard	5,050
104110205070089	102	1,960	Bright	sS	9,555	SupplierStandard	5,050
104110206070089	102	1,960	Bright	zZ	9,555	SupplierStandard	5,050
104110205270089	102	1,960	Galvanized	sS	9,555	SupplierStandard	5,050
104110206270089	102	1,960	Galvanized	zZ	9,555	SupplierStandard	5,050

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104110405050089	104	1,770	Bright	sS	8,970	SupplierStandard	5,250
104110406050089	104	1,770	Bright	zZ	8,970	SupplierStandard	5,250
104110405250089	104	1,770	Galvanized	sS	8,970	SupplierStandard	5,250
104110406250089	104	1,770	Galvanized	zZ	8,970	SupplierStandard	5,250
104110405070089	104	1,960	Bright	sS	9,933	SupplierStandard	5,250
104110406070089	104	1,960	Bright	zZ	9,933	SupplierStandard	5,250
104110405270089	104	1,960	Galvanized	sS	9,933	SupplierStandard	5,250
104110406270089	104	1,960	Galvanized	zZ	9,933	SupplierStandard	5,250
104110605050089	106	1,770	Bright	sS	9,319	SupplierStandard	5,454
104110606050089	106	1,770	Bright	zZ	9,319	SupplierStandard	5,454
104110605250089	106	1,770	Galvanized	sS	9,319	SupplierStandard	5,454
104110606250089	106	1,770	Galvanized	zZ	9,319	SupplierStandard	5,454
104110605070089	106	1,960	Bright	sS	10,319	SupplierStandard	5,454
104110606070089	106	1,960	Bright	zZ	10,319	SupplierStandard	5,454
104110605270089	106	1,960	Galvanized	sS	10,319	SupplierStandard	5,454
104110606270089	106	1,960	Galvanized	zZ	10,319	SupplierStandard	5,454
104110805050089	108	1,770	Bright	sS	9,673	SupplierStandard	5,662
104110806050089	108	1,770	Bright	zZ	9,673	SupplierStandard	5,662
104110805250089	108	1,770	Galvanized	sS	9,673	SupplierStandard	5,662
104110806250089	108	1,770	Galvanized	zZ	9,673	SupplierStandard	5,662
104110805070089	108	1,960	Bright	sS	10,712	SupplierStandard	5,662
104110806070089	108	1,960	Bright	zZ	10,712	SupplierStandard	5,662
104110805270089	108	1,960	Galvanized	sS	10,712	SupplierStandard	5,662
104110806270089	108	1,960	Galvanized	zZ	10,712	SupplierStandard	5,662
104111005050089	110	1,770	Bright	sS	10,036	SupplierStandard	5,873
104111006050089	110	1,770	Bright	zZ	10,036	SupplierStandard	5,873
104111005250089	110	1,770	Galvanized	sS	10,036	SupplierStandard	5,873
104111006250089	110	1,770	Galvanized	zZ	10,036	SupplierStandard	5,873
104111005070089	110	1,960	Bright	sS	11,113	SupplierStandard	5,873
104111006070089	110	1,960	Bright	zZ	11,113	SupplierStandard	5,873
104111005270089	110	1,960	Galvanized	sS	11,113	SupplierStandard	5,873

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104111006270089	110	1,960	Galvanized	zZ	11,113	SupplierStandard	5,873
104111205050089	112	1,770	Bright	sS	10,404	SupplierStandard	6,089
104111206050089	112	1,770	Bright	zZ	10,404	SupplierStandard	6,089
104111205250089	112	1,770	Galvanized	sS	10,404	SupplierStandard	6,089
104111206250089	112	1,770	Galvanized	zZ	10,404	SupplierStandard	6,089
104111205070089	112	1,960	Bright	sS	11,520	SupplierStandard	6,089
104111206070089	112	1,960	Bright	zZ	11,520	SupplierStandard	6,089
104111205270089	112	1,960	Galvanized	sS	11,520	SupplierStandard	6,089
104111206270089	112	1,960	Galvanized	zZ	11,520	SupplierStandard	6,089
104111405050089	114	1,770	Bright	sS	10,779	SupplierStandard	6,308
104111406050089	114	1,770	Bright	zZ	10,779	SupplierStandard	6,308
104111405250089	114	1,770	Galvanized	sS	10,779	SupplierStandard	6,308
104111406250089	114	1,770	Galvanized	zZ	10,779	SupplierStandard	6,308
104111405070089	114	1,960	Bright	sS	11,953	SupplierStandard	6,308
104111406070089	114	1,960	Bright	zZ	11,953	SupplierStandard	6,308
104111405270089	114	1,960	Galvanized	sS	11,953	SupplierStandard	6,308
104111406270089	114	1,960	Galvanized	zZ	11,953	SupplierStandard	6,308
104111605050089	116	1,770	Bright	sS	11,160	SupplierStandard	6,532
104111606050089	116	1,770	Bright	zZ	11,160	SupplierStandard	6,532
104111605250089	116	1,770	Galvanized	sS	11,160	SupplierStandard	6,532
104111606250089	116	1,770	Galvanized	zZ	11,160	SupplierStandard	6,532
104111605070089	116	1,960	Bright	sS	12,358	SupplierStandard	6,532
104111606070089	116	1,960	Bright	zZ	12,358	SupplierStandard	6,532
104111605270089	116	1,960	Galvanized	sS	12,358	SupplierStandard	6,532
104111606270089	116	1,960	Galvanized	zZ	12,358	SupplierStandard	6,532
104111805050089	118	1,770	Bright	sS	11,548	SupplierStandard	6,759
104111806050089	118	1,770	Bright	zZ	11,548	SupplierStandard	6,759
104111805250089	118	1,770	Galvanized	sS	11,548	SupplierStandard	6,759
104111806250089	118	1,770	Galvanized	zZ	11,548	SupplierStandard	6,759
104111805070089	118	1,960	Bright	sS	12,778	SupplierStandard	6,759
104111806070089	118	1,960	Bright	zZ	12,778	SupplierStandard	6,759

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel Wire Rope Diepa B55 (D 1315 CZ) , rotation-resistant

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
104111805270089	118	1,960	Galvanized	sS	12,778	SupplierStandard	6,759
104111806270089	118	1,960	Galvanized	zZ	12,778	SupplierStandard	6,759
104112005050089	120	1,770	Bright	sS	11,943	SupplierStandard	6,990
104112006050089	120	1,770	Bright	zZ	11,943	SupplierStandard	6,990
104112005250089	120	1,770	Galvanized	sS	11,943	SupplierStandard	6,990
104112006250089	120	1,770	Galvanized	zZ	11,943	SupplierStandard	6,990
104112005070089	120	1,960	Bright	sS	13,225	SupplierStandard	6,990
104112006070089	120	1,960	Bright	zZ	13,225	SupplierStandard	6,990
104112005270089	120	1,960	Galvanized	sS	13,225	SupplierStandard	6,990
104112006270089	120	1,960	Galvanized	zZ	13,225	SupplierStandard	6,990

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved