
Steel wire rope Diepa X53 (PZ371)

Product information

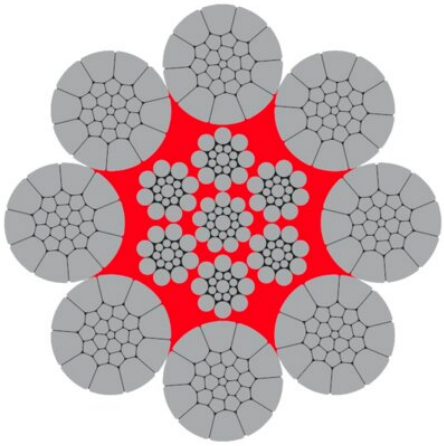

Diepa X53 is a non-rotation resistant wire rope with compacted outer strands, plastic insert and high breaking force.

Applications: Lifting wire for mobile cranes, deck cranes and container cranes where multiple parts is being used in lower lifting operations, and where right -and left hand lays are being used in at the same time. Winch and digging machines.

Lay: Ordinary Lay with platic insert.
Total number of wires: 4-14mm 201, 15-43mm 329, 44-65mm 409, 66-100mm 580.
ISO 4309 Rope Category No: 4-14mm **RCN.04**, 15-44mm **RCN.09**, 45-100mm **RCN.13**

Optional: X50 - Ordinary Lay, X55 - Lang Lay, X58 Lang Lay with plastic insert. From ø76mm tensile strenght 2160 N/mm2 on request

... *Read more*

Marking: According to standard
Finish: Galvanized or bright
Standard: EN 12385-4
Warning: Not to be used with a swivel

Fill factor: 0.6750
RCN: 04

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100404050189	4	1,770	Bright	sZ	12.8	SupplierStandard	8
103100403050189	4	1,770	Bright	zS	12.8	SupplierStandard	8
103100404250189	4	1,770	Galvanized	sZ	12.8	SupplierStandard	8
103100403250189	4	1,770	Galvanized	zS	12.8	SupplierStandard	8
103100404070189	4	1,960	Bright	sZ	14.1	SupplierStandard	8
103100403070189	4	1,960	Bright	zS	14.1	SupplierStandard	8
103100404270189	4	1,960	Galvanized	sZ	14.1	SupplierStandard	8
103100403270189	4	1,960	Galvanized	zS	14.1	SupplierStandard	8
103100404100189	4	2,160	Bright	sZ	15.4	SupplierStandard	8
103100403100189	4	2,160	Bright	zS	15.4	SupplierStandard	8
103100404300189	4	2,160	Galvanized	sZ	15.4	SupplierStandard	8
103100403300189	4	2,160	Galvanized	zS	15.4	SupplierStandard	8
103100504050189	5	1,770	Bright	sZ	19.9	SupplierStandard	12
103100503050189	5	1,770	Bright	zS	19.9	SupplierStandard	12
103100504250189	5	1,770	Galvanized	sZ	19.9	SupplierStandard	12
103100503250189	5	1,770	Galvanized	zS	19.9	SupplierStandard	12
103100504070189	5	1,960	Bright	sZ	22.1	SupplierStandard	12
103100503070189	5	1,960	Bright	zS	22.1	SupplierStandard	12
103100504270189	5	1,960	Galvanized	sZ	22.1	SupplierStandard	12
103100503270189	5	1,960	Galvanized	zS	22.1	SupplierStandard	12
103100504100189	5	2,160	Bright	sZ	24	SupplierStandard	12
103100503100189	5	2,160	Bright	zS	24	SupplierStandard	12
103100504300189	5	2,160	Galvanized	sZ	24	SupplierStandard	12
103100503300189	5	2,160	Galvanized	zS	24	SupplierStandard	12
103100604050189	6	1,770	Bright	sZ	28.7	SupplierStandard	17
103100603050189	6	1,770	Bright	zS	28.7	SupplierStandard	17
103100604250189	6	1,770	Galvanized	sZ	28.7	SupplierStandard	17
103100603250189	6	1,770	Galvanized	zS	28.7	SupplierStandard	17
103100604070189	6	1,960	Bright	sZ	31.8	SupplierStandard	17
103100603070189	6	1,960	Bright	zS	31.8	SupplierStandard	17
103100604270189	6	1,960	Galvanized	sZ	31.8	SupplierStandard	17

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100603270189	6	1,960	Galvanized	zS	31.8	SupplierStandard	17
103100604100189	6	2,160	Bright	sZ	34.6	SupplierStandard	17
103100603100189	6	2,160	Bright	zS	34.6	SupplierStandard	17
103100604300189	6	2,160	Galvanized	sZ	34.6	SupplierStandard	17
103100603300189	6	2,160	Galvanized	zS	34.6	SupplierStandard	17
103100654050189	6.5	1,770	Bright	sZ	28.7	SupplierStandard	20
103100653050189	6.5	1,770	Bright	zS	28.7	SupplierStandard	20
103100654250189	6.5	1,770	Galvanized	sZ	28.7	SupplierStandard	20
103100653250189	6.5	1,770	Galvanized	zS	28.7	SupplierStandard	20
103100654070189	6.5	1,960	Bright	sZ	31.8	SupplierStandard	20
103100653070189	6.5	1,960	Bright	zS	31.8	SupplierStandard	20
103100654270189	6.5	1,960	Galvanized	sZ	31.8	SupplierStandard	20
103100653270189	6.5	1,960	Galvanized	zS	31.8	SupplierStandard	20
103100654100189	6.5	2,160	Bright	sZ	34.6	SupplierStandard	20
103100653100189	6.5	2,160	Bright	zS	34.6	SupplierStandard	20
103100654300189	6.5	2,160	Galvanized	sZ	34.6	SupplierStandard	20
103100653300189	6.5	2,160	Galvanized	zS	34.6	SupplierStandard	20
103100704050189	7	1,770	Bright	sZ	39.1	SupplierStandard	23
103100703050189	7	1,770	Bright	zS	39.1	SupplierStandard	23
103100704250189	7	1,770	Galvanized	sZ	39.1	SupplierStandard	23
103100703250189	7	1,770	Galvanized	zS	39.1	SupplierStandard	23
103100704070189	7	1,960	Bright	sZ	43.3	SupplierStandard	23
103100703070189	7	1,960	Bright	zS	43.3	SupplierStandard	23
103100704270189	7	1,960	Galvanized	sZ	43.3	SupplierStandard	23
103100703270189	7	1,960	Galvanized	zS	43.3	SupplierStandard	23
103100704100189	7	2,160	Bright	sZ	47.1	SupplierStandard	23
103100703100189	7	2,160	Bright	zS	47.1	SupplierStandard	23
103100704300189	7	2,160	Galvanized	sZ	47.1	SupplierStandard	23
103100703300189	7	2,160	Galvanized	zS	47.1	SupplierStandard	23
103100754050189	7.5	1,770	Bright	sZ	44.9	SupplierStandard	27
103100753050189	7.5	1,770	Bright	zS	44.9	SupplierStandard	27

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100754250189	7.5	1,770	Galvanized	sZ	44.9	SupplierStandard	27
103100753250189	7.5	1,770	Galvanized	zS	44.9	SupplierStandard	27
103100754070189	7.5	1,960	Bright	sZ	49.7	SupplierStandard	27
103100753070189	7.5	1,960	Bright	zS	49.7	SupplierStandard	27
103100754270189	7.5	1,960	Galvanized	sZ	49.7	SupplierStandard	27
103100753270189	7.5	1,960	Galvanized	zS	49.7	SupplierStandard	27
103100754100189	7.5	2,160	Bright	sZ	54.1	SupplierStandard	27
103100753100189	7.5	2,160	Bright	zS	54.1	SupplierStandard	27
103100754300189	7.5	2,160	Galvanized	sZ	54.1	SupplierStandard	27
103100753300189	7.5	2,160	Galvanized	zS	54.1	SupplierStandard	27
103100804050189	8	1,770	Bright	sZ	51	SupplierStandard	30
103100803050189	8	1,770	Bright	zS	51	SupplierStandard	30
103100804250189	8	1,770	Galvanized	sZ	51	SupplierStandard	30
103100803250189	8	1,770	Galvanized	zS	51	SupplierStandard	30
103100804070189	8	1,960	Bright	sZ	56.5	SupplierStandard	30
103100803070189	8	1,960	Bright	zS	56.5	SupplierStandard	30
103100804270189	8	1,960	Galvanized	sZ	56.5	SupplierStandard	30
103100803270189	8	1,960	Galvanized	zS	56.5	SupplierStandard	30
103100804100189	8	2,160	Bright	sZ	61.6	SupplierStandard	30
103100803100189	8	2,160	Bright	zS	61.6	SupplierStandard	30
103100804300189	8	2,160	Galvanized	sZ	61.6	SupplierStandard	30
103100803300189	8	2,160	Galvanized	zS	61.6	SupplierStandard	30
103100854050189	8.5	1,770	Bright	sZ	57.6	SupplierStandard	34
103100853050189	8.5	1,770	Bright	zS	57.6	SupplierStandard	34
103100854250189	8.5	1,770	Galvanized	sZ	57.6	SupplierStandard	34
103100853250189	8.5	1,770	Galvanized	zS	57.6	SupplierStandard	34
103100854070189	8.5	1,960	Bright	sZ	63.8	SupplierStandard	34
103100853070189	8.5	1,960	Bright	zS	63.8	SupplierStandard	34
103100854270189	8.5	1,960	Galvanized	sZ	63.8	SupplierStandard	34
103100853270189	8.5	1,960	Galvanized	zS	63.8	SupplierStandard	34
103100854100189	8.5	2,160	Bright	sZ	69.5	SupplierStandard	34

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103100853100189	8.5	2,160	Bright	zS	69.5	SupplierStandard	34
103100854300189	8.5	2,160	Galvanized	sZ	69.5	SupplierStandard	34
103100853300189	8.5	2,160	Galvanized	zS	69.5	SupplierStandard	34
103100904050189	9	1,770	Bright	sZ	64.6	SupplierStandard	38
103100903050189	9	1,770	Bright	zS	64.6	SupplierStandard	38
103100904250189	9	1,770	Galvanized	sZ	64.6	SupplierStandard	38
103100903250189	9	1,770	Galvanized	zS	64.6	SupplierStandard	38
103100904070189	9	1,960	Bright	sZ	71.5	SupplierStandard	38
103100903070189	9	1,960	Bright	zS	71.5	SupplierStandard	38
103100904270189	9	1,960	Galvanized	sZ	71.5	SupplierStandard	38
103100903270189	9	1,960	Galvanized	zS	71.5	SupplierStandard	38
103100904100189	9	2,160	Bright	sZ	77.9	SupplierStandard	38
103100903100189	9	2,160	Bright	zS	77.9	SupplierStandard	38
103100904300189	9	2,160	Galvanized	sZ	77.9	SupplierStandard	38
103100903300189	9	2,160	Galvanized	zS	77.9	SupplierStandard	38
103100954050189	9.5	1,770	Bright	sZ	72	SupplierStandard	43
103100953050189	9.5	1,770	Bright	zS	72	SupplierStandard	43
103100954250189	9.5	1,770	Galvanized	sZ	72	SupplierStandard	43
103100953250189	9.5	1,770	Galvanized	zS	72	SupplierStandard	43
103100954070189	9.5	1,960	Bright	sZ	79.7	SupplierStandard	43
103100953070189	9.5	1,960	Bright	zS	79.7	SupplierStandard	43
103100954270189	9.5	1,960	Galvanized	sZ	79.7	SupplierStandard	43
103100953270189	9.5	1,960	Galvanized	zS	79.7	SupplierStandard	43
103100954100189	9.5	2,160	Bright	sZ	86.5	SupplierStandard	43
103100953100189	9.5	2,160	Bright	zS	86.5	SupplierStandard	43
103100954300189	9.5	2,160	Galvanized	sZ	86.5	SupplierStandard	43
103100953300189	9.5	2,160	Galvanized	zS	86.5	SupplierStandard	43
103101004050189	10	1,770	Bright	sZ	79.8	SupplierStandard	47
103101003050189	10	1,770	Bright	zS	79.8	SupplierStandard	47
103101004250189	10	1,770	Galvanized	sZ	79.8	SupplierStandard	47
103101003250189	10	1,770	Galvanized	zS	79.8	SupplierStandard	47

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101004070189	10	1,960	Bright	sZ	88.4	SupplierStandard	47
103101003070189	10	1,960	Bright	zS	88.4	SupplierStandard	47
103101004270189	10	1,960	Galvanized	sZ	88.4	SupplierStandard	47
103101003270189	10	1,960	Galvanized	zS	88.4	SupplierStandard	47
103101004100189	10	2,160	Bright	sZ	96.6	SupplierStandard	47
103101003100189	10	2,160	Bright	zS	96.6	SupplierStandard	47
103101004300189	10	2,160	Galvanized	sZ	96.6	SupplierStandard	47
103101003300189	10	2,160	Galvanized	zS	96.6	SupplierStandard	47
103101104050189	11	1,770	Bright	sZ	96.9	SupplierStandard	57
103101103050189	11	1,770	Bright	zS	96.9	SupplierStandard	57
103101104250189	11	1,770	Galvanized	sZ	96.9	SupplierStandard	57
103101103250189	11	1,770	Galvanized	zS	96.9	SupplierStandard	57
103101104070189	11	1,960	Bright	sZ	107	SupplierStandard	57
103101103070189	11	1,960	Bright	zS	107	SupplierStandard	57
103101104270189	11	1,960	Galvanized	sZ	107	SupplierStandard	57
103101103270189	11	1,960	Galvanized	zS	107	SupplierStandard	57
103101104100189	11	2,160	Bright	sZ	117	SupplierStandard	57
103101103100189	11	2,160	Bright	zS	117	SupplierStandard	57
103101104300189	11	2,160	Galvanized	sZ	117	SupplierStandard	57
103101103300189	11	2,160	Galvanized	zS	117	SupplierStandard	57
103101204050189	12	1,770	Bright	sZ	115	SupplierStandard	68
103101203050189	12	1,770	Bright	zS	115	SupplierStandard	68
103101204250189	12	1,770	Galvanized	sZ	115	SupplierStandard	68
103101203250189	12	1,770	Galvanized	zS	115	SupplierStandard	68
103101204070189	12	1,960	Bright	sZ	128	SupplierStandard	68
103101203070189	12	1,960	Bright	zS	128	SupplierStandard	68
103101204270189	12	1,960	Galvanized	sZ	128	SupplierStandard	68
103101203270189	12	1,960	Galvanized	zS	128	SupplierStandard	68
103101204100189	12	2,160	Bright	sZ	139	SupplierStandard	68
103101203100189	12	2,160	Bright	zS	139	SupplierStandard	68
103101204300189	12	2,160	Galvanized	sZ	139	SupplierStandard	68

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101203300189	12	2,160	Galvanized	zS	139	SupplierStandard	68
103101304050189	13	1,770	Bright	sZ	135	SupplierStandard	80
103101303050189	13	1,770	Bright	zS	135	SupplierStandard	80
103101304250189	13	1,770	Galvanized	sZ	135	SupplierStandard	80
103101303250189	13	1,770	Galvanized	zS	135	SupplierStandard	80
103101304070189	13	1,960	Bright	sZ	150	SupplierStandard	80
103101303070189	13	1,960	Bright	zS	150	SupplierStandard	80
103101304270189	13	1,960	Galvanized	sZ	150	SupplierStandard	80
103101303270189	13	1,960	Galvanized	zS	150	SupplierStandard	80
103101304100189	13	2,160	Bright	sZ	163	SupplierStandard	80
103101303100189	13	2,160	Bright	zS	163	SupplierStandard	80
103101304300189	13	2,160	Galvanized	sZ	163	SupplierStandard	80
103101303300189	13	2,160	Galvanized	zS	163	SupplierStandard	80
103101404050189	14	1,770	Bright	sZ	156	SupplierStandard	92
103101403050189	14	1,770	Bright	zS	156	SupplierStandard	92
103101404250189	14	1,770	Galvanized	sZ	156	SupplierStandard	92
103101403250189	14	1,770	Galvanized	zS	156	SupplierStandard	92
103101404070189	14	1,960	Bright	sZ	173	SupplierStandard	92
103101403070189	14	1,960	Bright	zS	173	SupplierStandard	92
103101404270189	14	1,960	Galvanized	sZ	173	SupplierStandard	92
103101403270189	14	1,960	Galvanized	zS	173	SupplierStandard	92
103101404100189	14	2,160	Bright	sZ	188	SupplierStandard	92
103101403100189	14	2,160	Bright	zS	188	SupplierStandard	92
103101404300189	14	2,160	Galvanized	sZ	188	SupplierStandard	92
103101403300189	14	2,160	Galvanized	zS	188	SupplierStandard	92
103101504050189	15	1,770	Bright	sZ	179	SupplierStandard	106
103101503050189	15	1,770	Bright	zS	179	SupplierStandard	106
103101504250189	15	1,770	Galvanized	sZ	179	SupplierStandard	106
103101503250189	15	1,770	Galvanized	zS	179	SupplierStandard	106
103101504070189	15	1,960	Bright	sZ	199	SupplierStandard	106
103101503070189	15	1,960	Bright	zS	199	SupplierStandard	106

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101504270189	15	1,960	Galvanized	sZ	199	SupplierStandard	106
103101503270189	15	1,960	Galvanized	zS	199	SupplierStandard	106
103101504100189	15	2,160	Bright	sZ	217	SupplierStandard	106
103101503100189	15	2,160	Bright	zS	217	SupplierStandard	106
103101504300189	15	2,160	Galvanized	sZ	217	SupplierStandard	106
103101503300189	15	2,160	Galvanized	zS	217	SupplierStandard	106
103101604050189	16	1,770	Bright	sZ	204	SupplierStandard	121
103101603050189	16	1,770	Bright	zS	204	SupplierStandard	121
103101604250189	16	1,770	Galvanized	sZ	204	SupplierStandard	121
103101603250189	16	1,770	Galvanized	zS	204	SupplierStandard	121
103101604070189	16	1,960	Bright	sZ	226	SupplierStandard	121
103101603070189	16	1,960	Bright	zS	226	SupplierStandard	121
103101604270189	16	1,960	Galvanized	sZ	226	SupplierStandard	121
103101603270189	16	1,960	Galvanized	zS	226	SupplierStandard	121
103101604100189	16	2,160	Bright	sZ	246	SupplierStandard	121
103101603100189	16	2,160	Bright	zS	246	SupplierStandard	121
103101604300189	16	2,160	Galvanized	sZ	246	SupplierStandard	121
103101603300189	16	2,160	Galvanized	zS	246	SupplierStandard	121
103101704050189	17	1,770	Bright	sZ	230	SupplierStandard	136
103101703050189	17	1,770	Bright	zS	230	SupplierStandard	136
103101704250189	17	1,770	Galvanized	sZ	230	SupplierStandard	136
103101703250189	17	1,770	Galvanized	zS	230	SupplierStandard	136
103101704070189	17	1,960	Bright	sZ	255	SupplierStandard	136
103101703070189	17	1,960	Bright	zS	255	SupplierStandard	136
103101704270189	17	1,960	Galvanized	sZ	255	SupplierStandard	136
103101703270189	17	1,960	Galvanized	zS	255	SupplierStandard	136
103101704100189	17	2,160	Bright	sZ	278	SupplierStandard	136
103101703100189	17	2,160	Bright	zS	278	SupplierStandard	136
103101704300189	17	2,160	Galvanized	sZ	278	SupplierStandard	136
103101703300189	17	2,160	Galvanized	zS	278	SupplierStandard	136
103101804050189	18	1,770	Bright	sZ	258	SupplierStandard	153

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103101803050189	18	1,770	Bright	zS	258	SupplierStandard	153
103101804250189	18	1,770	Galvanized	sZ	258	SupplierStandard	153
103101803250189	18	1,770	Galvanized	zS	258	SupplierStandard	153
103101804070189	18	1,960	Bright	sZ	286	SupplierStandard	153
103101803070189	18	1,960	Bright	zS	286	SupplierStandard	153
103101804270189	18	1,960	Galvanized	sZ	286	SupplierStandard	153
103101803270189	18	1,960	Galvanized	zS	286	SupplierStandard	153
103101804100189	18	2,160	Bright	sZ	312	SupplierStandard	153
103101803100189	18	2,160	Bright	zS	312	SupplierStandard	153
103101804300189	18	2,160	Galvanized	sZ	312	SupplierStandard	153
103101803300189	18	2,160	Galvanized	zS	312	SupplierStandard	153
103101904050189	19	1,770	Bright	sZ	288	SupplierStandard	170
103101903050189	19	1,770	Bright	zS	288	SupplierStandard	170
103101904250189	19	1,770	Galvanized	sZ	288	SupplierStandard	170
103101903250189	19	1,770	Galvanized	zS	288	SupplierStandard	170
103101904070189	19	1,960	Bright	sZ	319	SupplierStandard	170
103101903070189	19	1,960	Bright	zS	319	SupplierStandard	170
103101904270189	19	1,960	Galvanized	sZ	319	SupplierStandard	170
103101903270189	19	1,960	Galvanized	zS	319	SupplierStandard	170
103101904100189	19	2,160	Bright	sZ	347	SupplierStandard	170
103101903100189	19	2,160	Bright	zS	347	SupplierStandard	170
103101904300189	19	2,160	Galvanized	sZ	347	SupplierStandard	170
103101903300189	19	2,160	Galvanized	zS	347	SupplierStandard	170
103102004050189	20	1,770	Bright	sZ	319	SupplierStandard	189
103102003050189	20	1,770	Bright	zS	319	SupplierStandard	189
103102004250189	20	1,770	Galvanized	sZ	319	SupplierStandard	189
103102003250189	20	1,770	Galvanized	zS	319	SupplierStandard	189
103102004070189	20	1,960	Bright	sZ	354	SupplierStandard	189
103102003070189	20	1,960	Bright	zS	354	SupplierStandard	189
103102004270189	20	1,960	Galvanized	sZ	354	SupplierStandard	189
103102003270189	20	1,960	Galvanized	zS	354	SupplierStandard	189

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102004100189	20	2,160	Bright	sZ	385	SupplierStandard	189
103102003100189	20	2,160	Bright	zS	385	SupplierStandard	189
103102004300189	20	2,160	Galvanized	sZ	385	SupplierStandard	189
103102003300189	20	2,160	Galvanized	zS	385	SupplierStandard	189
103102104050189	21	1,770	Bright	sZ	352	SupplierStandard	208
103102103050189	21	1,770	Bright	zS	352	SupplierStandard	208
103102104250189	21	1,770	Galvanized	sZ	352	SupplierStandard	208
103102103250189	21	1,770	Galvanized	zS	352	SupplierStandard	208
103102104070189	21	1,960	Bright	sZ	389	SupplierStandard	208
103102103070189	21	1,960	Bright	zS	389	SupplierStandard	208
103102104270189	21	1,960	Galvanized	sZ	389	SupplierStandard	208
103102103270189	21	1,960	Galvanized	zS	389	SupplierStandard	208
103102104100189	21	2,160	Bright	sZ	424	SupplierStandard	208
103102103100189	21	2,160	Bright	zS	424	SupplierStandard	208
103102104300189	21	2,160	Galvanized	sZ	424	SupplierStandard	208
103102103300189	21	2,160	Galvanized	zS	424	SupplierStandard	208
103102204050189	22	1,770	Bright	sZ	386	SupplierStandard	228
103102203050189	22	1,770	Bright	zS	386	SupplierStandard	228
103102204250189	22	1,770	Galvanized	sZ	386	SupplierStandard	228
103102203250189	22	1,770	Galvanized	zS	386	SupplierStandard	228
103102204070189	22	1,960	Bright	sZ	428	SupplierStandard	228
103102203070189	22	1,960	Bright	zS	428	SupplierStandard	228
103102204270189	22	1,960	Galvanized	sZ	428	SupplierStandard	228
103102203270189	22	1,960	Galvanized	zS	428	SupplierStandard	228
103102204100189	22	2,160	Bright	sZ	465	SupplierStandard	228
103102203100189	22	2,160	Bright	zS	465	SupplierStandard	228
103102204300189	22	2,160	Galvanized	sZ	465	SupplierStandard	228
103102203300189	22	2,160	Galvanized	zS	465	SupplierStandard	228
103102304050189	23	1,770	Bright	sZ	422	SupplierStandard	250
103102303050189	23	1,770	Bright	zS	422	SupplierStandard	250
103102304250189	23	1,770	Galvanized	sZ	422	SupplierStandard	250

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102303250189	23	1,770	Galvanized	zS	422	SupplierStandard	250
103102304070189	23	1,960	Bright	sZ	468	SupplierStandard	250
103102303070189	23	1,960	Bright	zS	468	SupplierStandard	250
103102304270189	23	1,960	Galvanized	sZ	468	SupplierStandard	250
103102303270189	23	1,960	Galvanized	zS	468	SupplierStandard	250
103102304100189	23	2,160	Bright	sZ	509	SupplierStandard	250
103102303100189	23	2,160	Bright	zS	509	SupplierStandard	250
103102304300189	23	2,160	Galvanized	sZ	509	SupplierStandard	250
103102303300189	23	2,160	Galvanized	zS	509	SupplierStandard	250
103102404050189	24	1,770	Bright	sZ	459	SupplierStandard	272
103102403050189	24	1,770	Bright	zS	459	SupplierStandard	272
103102404250189	24	1,770	Galvanized	sZ	459	SupplierStandard	272
103102403250189	24	1,770	Galvanized	zS	459	SupplierStandard	272
103102404070189	24	1,960	Bright	sZ	509	SupplierStandard	272
103102403070189	24	1,960	Bright	zS	509	SupplierStandard	272
103102404270189	24	1,960	Galvanized	sZ	509	SupplierStandard	272
103102403270189	24	1,960	Galvanized	zS	509	SupplierStandard	272
103102404100189	24	2,160	Bright	sZ	554	SupplierStandard	272
103102403100189	24	2,160	Bright	zS	554	SupplierStandard	272
103102404300189	24	2,160	Galvanized	sZ	554	SupplierStandard	272
103102403300189	24	2,160	Galvanized	zS	554	SupplierStandard	272
103102504050189	25	1,770	Bright	sZ	498	SupplierStandard	295
103102503050189	25	1,770	Bright	zS	498	SupplierStandard	295
103102504250189	25	1,770	Galvanized	sZ	498	SupplierStandard	295
103102503250189	25	1,770	Galvanized	zS	498	SupplierStandard	295
103102504070189	25	1,960	Bright	sZ	552	SupplierStandard	295
103102503070189	25	1,960	Bright	zS	552	SupplierStandard	295
103102504270189	25	1,960	Galvanized	sZ	552	SupplierStandard	295
103102503270189	25	1,960	Galvanized	zS	552	SupplierStandard	295
103102504100189	25	2,160	Bright	sZ	601	SupplierStandard	295
103102503100189	25	2,160	Bright	zS	601	SupplierStandard	295

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102504300189	25	2,160	Galvanized	sZ	601	SupplierStandard	295
103102503300189	25	2,160	Galvanized	zS	601	SupplierStandard	295
103102604050189	26	1,770	Bright	sZ	539	SupplierStandard	319
103102603050189	26	1,770	Bright	zS	539	SupplierStandard	319
103102604250189	26	1,770	Galvanized	sZ	539	SupplierStandard	319
103102603250189	26	1,770	Galvanized	zS	539	SupplierStandard	319
103102604070189	26	1,960	Bright	sZ	597	SupplierStandard	319
103102603070189	26	1,960	Bright	zS	597	SupplierStandard	319
103102604270189	26	1,960	Galvanized	sZ	597	SupplierStandard	319
103102603270189	26	1,960	Galvanized	zS	597	SupplierStandard	319
103102604100189	26	2,160	Bright	sZ	650	SupplierStandard	319
103102603100189	26	2,160	Bright	zS	650	SupplierStandard	319
103102604300189	26	2,160	Galvanized	sZ	650	SupplierStandard	319
103102603300189	26	2,160	Galvanized	zS	650	SupplierStandard	319
103102704050189	27	1,770	Bright	sZ	581	SupplierStandard	344
103102703050189	27	1,770	Bright	zS	581	SupplierStandard	344
103102704250189	27	1,770	Galvanized	sZ	581	SupplierStandard	344
103102703250189	27	1,770	Galvanized	zS	581	SupplierStandard	344
103102704070189	27	1,960	Bright	sZ	643	SupplierStandard	344
103102703070189	27	1,960	Bright	zS	643	SupplierStandard	344
103102704270189	27	1,960	Galvanized	sZ	643	SupplierStandard	344
103102703270189	27	1,960	Galvanized	zS	643	SupplierStandard	344
103102704100189	27	2,160	Bright	sZ	701	SupplierStandard	344
103102703100189	27	2,160	Bright	zS	701	SupplierStandard	344
103102704300189	27	2,160	Galvanized	sZ	701	SupplierStandard	344
103102703300189	27	2,160	Galvanized	zS	701	SupplierStandard	344
103102804050189	28	1,770	Bright	sZ	626	SupplierStandard	370
103102803050189	28	1,770	Bright	zS	626	SupplierStandard	370
103102804250189	28	1,770	Galvanized	sZ	626	SupplierStandard	370
103102803250189	28	1,770	Galvanized	zS	626	SupplierStandard	370
103102804070189	28	1,960	Bright	sZ	693	SupplierStandard	370

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103102803070189	28	1,960	Bright	zS	693	SupplierStandard	370
103102804270189	28	1,960	Galvanized	sZ	693	SupplierStandard	370
103102803270189	28	1,960	Galvanized	zS	693	SupplierStandard	370
103102804100189	28	2,160	Bright	sZ	754	SupplierStandard	370
103102803100189	28	2,160	Bright	zS	754	SupplierStandard	370
103102804300189	28	2,160	Galvanized	sZ	754	SupplierStandard	370
103102803300189	28	2,160	Galvanized	zS	754	SupplierStandard	370
103102904050189	29	1,770	Bright	sZ	671	SupplierStandard	397
103102903050189	29	1,770	Bright	zS	671	SupplierStandard	397
103102904250189	29	1,770	Galvanized	sZ	671	SupplierStandard	397
103102903250189	29	1,770	Galvanized	zS	671	SupplierStandard	397
103102904070189	29	1,960	Bright	sZ	743	SupplierStandard	397
103102903070189	29	1,960	Bright	zS	743	SupplierStandard	397
103102904270189	29	1,960	Galvanized	sZ	743	SupplierStandard	397
103102903270189	29	1,960	Galvanized	zS	743	SupplierStandard	397
103102904100189	29	2,160	Bright	sZ	809	SupplierStandard	397
103102903100189	29	2,160	Bright	zS	809	SupplierStandard	397
103102904300189	29	2,160	Galvanized	sZ	809	SupplierStandard	397
103102903300189	29	2,160	Galvanized	zS	809	SupplierStandard	397
103103004050189	30	1,770	Bright	sZ	718	SupplierStandard	425
103103003050189	30	1,770	Bright	zS	718	SupplierStandard	425
103103004250189	30	1,770	Galvanized	sZ	718	SupplierStandard	425
103103003250189	30	1,770	Galvanized	zS	718	SupplierStandard	425
103103004070189	30	1,960	Bright	sZ	795	SupplierStandard	425
103103003070189	30	1,960	Bright	zS	795	SupplierStandard	425
103103004270189	30	1,960	Galvanized	sZ	795	SupplierStandard	425
103103003270189	30	1,960	Galvanized	zS	795	SupplierStandard	425
103103004100189	30	2,160	Bright	sZ	866	SupplierStandard	425
103103003100189	30	2,160	Bright	zS	866	SupplierStandard	425
103103004300189	30	2,160	Galvanized	sZ	866	SupplierStandard	425
103103003300189	30	2,160	Galvanized	zS	866	SupplierStandard	425

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103104050189	31	1,770	Bright	sZ	772	SupplierStandard	457
103103103050189	31	1,770	Bright	zS	772	SupplierStandard	457
103103104250189	31	1,770	Galvanized	sZ	772	SupplierStandard	457
103103103250189	31	1,770	Galvanized	zS	772	SupplierStandard	457
103103104070189	31	1,960	Bright	sZ	855	SupplierStandard	457
103103103070189	31	1,960	Bright	zS	855	SupplierStandard	457
103103104270189	31	1,960	Galvanized	sZ	855	SupplierStandard	457
103103103270189	31	1,960	Galvanized	zS	855	SupplierStandard	457
103103104100189	31	2,160	Bright	sZ	932	SupplierStandard	457
103103103100189	31	2,160	Bright	zS	932	SupplierStandard	457
103103104300189	31	2,160	Galvanized	sZ	932	SupplierStandard	457
103103103300189	31	2,160	Galvanized	zS	932	SupplierStandard	457
103103204050189	32	1,770	Bright	sZ	823	SupplierStandard	487
103103203050189	32	1,770	Bright	zS	823	SupplierStandard	487
103103204250189	32	1,770	Galvanized	sZ	823	SupplierStandard	487
103103203250189	32	1,770	Galvanized	zS	823	SupplierStandard	487
103103204070189	32	1,960	Bright	sZ	911	SupplierStandard	487
103103203070189	32	1,960	Bright	zS	911	SupplierStandard	487
103103204270189	32	1,960	Galvanized	sZ	911	SupplierStandard	487
103103203270189	32	1,960	Galvanized	zS	911	SupplierStandard	487
103103204100189	32	2,160	Bright	sZ	992	SupplierStandard	487
103103203100189	32	2,160	Bright	zS	992	SupplierStandard	487
103103204300189	32	2,160	Galvanized	sZ	992	SupplierStandard	487
103103203300189	32	2,160	Galvanized	zS	992	SupplierStandard	487
103103304050189	33	1,770	Bright	sZ	875	SupplierStandard	518
103103303050189	33	1,770	Bright	zS	875	SupplierStandard	518
103103304250189	33	1,770	Galvanized	sZ	875	SupplierStandard	518
103103303250189	33	1,770	Galvanized	zS	875	SupplierStandard	518
103103304070189	33	1,960	Bright	sZ	969	SupplierStandard	518
103103303070189	33	1,960	Bright	zS	969	SupplierStandard	518
103103304270189	33	1,960	Galvanized	sZ	969	SupplierStandard	518

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103303270189	33	1,960	Galvanized	zS	969	SupplierStandard	518
103103304100189	33	2,160	Bright	sZ	1,055	SupplierStandard	518
103103303100189	33	2,160	Bright	zS	1,055	SupplierStandard	518
103103304300189	33	2,160	Galvanized	sZ	1,055	SupplierStandard	518
103103303300189	33	2,160	Galvanized	zS	1,055	SupplierStandard	518
103103404050189	34	1,770	Bright	sZ	929	SupplierStandard	549
103103403050189	34	1,770	Bright	zS	929	SupplierStandard	549
103103404250189	34	1,770	Galvanized	sZ	929	SupplierStandard	549
103103403250189	34	1,770	Galvanized	zS	929	SupplierStandard	549
103103404070189	34	1,960	Bright	sZ	1,030	SupplierStandard	549
103103403070189	34	1,960	Bright	zS	1,030	SupplierStandard	549
103103404270189	34	1,960	Galvanized	sZ	1,030	SupplierStandard	549
103103403270189	34	1,960	Galvanized	zS	1,030	SupplierStandard	549
103103404100189	34	2,160	Bright	sZ	1,121	SupplierStandard	549
103103403100189	34	2,160	Bright	zS	1,121	SupplierStandard	549
103103404300189	34	2,160	Galvanized	sZ	1,121	SupplierStandard	549
103103403300189	34	2,160	Galvanized	zS	1,121	SupplierStandard	549
103103504050189	35	1,770	Bright	sZ	984	SupplierStandard	582
103103503050189	35	1,770	Bright	zS	984	SupplierStandard	582
103103504250189	35	1,770	Galvanized	sZ	984	SupplierStandard	582
103103503250189	35	1,770	Galvanized	zS	984	SupplierStandard	582
103103504070189	35	1,960	Bright	sZ	1,090	SupplierStandard	582
103103503070189	35	1,960	Bright	zS	1,090	SupplierStandard	582
103103504270189	35	1,960	Galvanized	sZ	1,090	SupplierStandard	582
103103503270189	35	1,960	Galvanized	zS	1,090	SupplierStandard	582
103103504100189	35	2,160	Bright	sZ	1,187	SupplierStandard	582
103103503100189	35	2,160	Bright	zS	1,187	SupplierStandard	582
103103504300189	35	2,160	Galvanized	sZ	1,187	SupplierStandard	582
103103503300189	35	2,160	Galvanized	zS	1,187	SupplierStandard	582
103103604050189	36	1,770	Bright	sZ	1,041	SupplierStandard	616
103103603050189	36	1,770	Bright	zS	1,041	SupplierStandard	616

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103604250189	36	1,770	Galvanized	sZ	1,041	SupplierStandard	616
103103603250189	36	1,770	Galvanized	zS	1,041	SupplierStandard	616
103103604070189	36	1,960	Bright	sZ	1,153	SupplierStandard	616
103103603070189	36	1,960	Bright	zS	1,153	SupplierStandard	616
103103604270189	36	1,960	Galvanized	sZ	1,153	SupplierStandard	616
103103603270189	36	1,960	Galvanized	zS	1,153	SupplierStandard	616
103103604100189	36	2,160	Bright	sZ	1,256	SupplierStandard	616
103103603100189	36	2,160	Bright	zS	1,256	SupplierStandard	616
103103604300189	36	2,160	Galvanized	sZ	1,256	SupplierStandard	616
103103603300189	36	2,160	Galvanized	zS	1,256	SupplierStandard	616
103103704050189	37	1,770	Bright	sZ	1,100	SupplierStandard	651
103103703050189	37	1,770	Bright	zS	1,100	SupplierStandard	651
103103704250189	37	1,770	Galvanized	sZ	1,100	SupplierStandard	651
103103703250189	37	1,770	Galvanized	zS	1,100	SupplierStandard	651
103103704070189	37	1,960	Bright	sZ	1,221	SupplierStandard	651
103103703070189	37	1,960	Bright	zS	1,221	SupplierStandard	651
103103704270189	37	1,960	Galvanized	sZ	1,221	SupplierStandard	651
103103703270189	37	1,960	Galvanized	zS	1,221	SupplierStandard	651
103103704100189	37	2,160	Bright	sZ	1,328	SupplierStandard	651
103103703100189	37	2,160	Bright	zS	1,328	SupplierStandard	651
103103704300189	37	2,160	Galvanized	sZ	1,328	SupplierStandard	651
103103703300189	37	2,160	Galvanized	zS	1,328	SupplierStandard	651
103103804050189	38	1,770	Bright	sZ	1,168	SupplierStandard	686
103103803050189	38	1,770	Bright	zS	1,168	SupplierStandard	686
103103804250189	38	1,770	Galvanized	sZ	1,168	SupplierStandard	686
103103803250189	38	1,770	Galvanized	zS	1,168	SupplierStandard	686
103103804070189	38	1,960	Bright	sZ	1,298	SupplierStandard	686
103103803070189	38	1,960	Bright	zS	1,298	SupplierStandard	686
103103804270189	38	1,960	Galvanized	sZ	1,298	SupplierStandard	686
103103803270189	38	1,960	Galvanized	zS	1,298	SupplierStandard	686
103103804100189	38	2,160	Bright	sZ	1,413	SupplierStandard	686

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103103803100189	38	2,160	Bright	zS	1,413	SupplierStandard	686
103103804300189	38	2,160	Galvanized	sZ	1,413	SupplierStandard	686
103103803300189	38	2,160	Galvanized	zS	1,413	SupplierStandard	686
103103904050189	39	1,770	Bright	sZ	1,222	SupplierStandard	723
103103903050189	39	1,770	Bright	zS	1,222	SupplierStandard	723
103103904250189	39	1,770	Galvanized	sZ	1,222	SupplierStandard	723
103103903250189	39	1,770	Galvanized	zS	1,222	SupplierStandard	723
103103904070189	39	1,960	Bright	sZ	1,353	SupplierStandard	723
103103903070189	39	1,960	Bright	zS	1,353	SupplierStandard	723
103103904270189	39	1,960	Galvanized	sZ	1,353	SupplierStandard	723
103103903270189	39	1,960	Galvanized	zS	1,353	SupplierStandard	723
103103904100189	39	2,160	Bright	sZ	1,474	SupplierStandard	723
103103903100189	39	2,160	Bright	zS	1,474	SupplierStandard	723
103103904300189	39	2,160	Galvanized	sZ	1,474	SupplierStandard	723
103103903300189	39	2,160	Galvanized	zS	1,474	SupplierStandard	723
103104004050189	40	1,770	Bright	sZ	1,285	SupplierStandard	761
103104003050189	40	1,770	Bright	zS	1,285	SupplierStandard	761
103104004250189	40	1,770	Galvanized	sZ	1,285	SupplierStandard	761
103104003250189	40	1,770	Galvanized	zS	1,285	SupplierStandard	761
103104004070189	40	1,960	Bright	sZ	1,424	SupplierStandard	761
103104003070189	40	1,960	Bright	zS	1,424	SupplierStandard	761
103104004270189	40	1,960	Galvanized	sZ	1,424	SupplierStandard	761
103104003270189	40	1,960	Galvanized	zS	1,424	SupplierStandard	761
103104004100189	40	2,160	Bright	sZ	1,551	SupplierStandard	761
103104003100189	40	2,160	Bright	zS	1,551	SupplierStandard	761
103104004300189	40	2,160	Galvanized	sZ	1,551	SupplierStandard	761
103104003300189	40	2,160	Galvanized	zS	1,551	SupplierStandard	761
103104104050189	41	1,770	Bright	sZ	1,351	SupplierStandard	799
103104103050189	41	1,770	Bright	zS	1,351	SupplierStandard	799
103104104250189	41	1,770	Galvanized	sZ	1,351	SupplierStandard	799
103104103250189	41	1,770	Galvanized	zS	1,351	SupplierStandard	799

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104104070189	41	1,960	Bright	sZ	1,496	SupplierStandard	799
103104103070189	41	1,960	Bright	zS	1,496	SupplierStandard	799
103104104270189	41	1,960	Galvanized	sZ	1,496	SupplierStandard	799
103104103270189	41	1,960	Galvanized	zS	1,496	SupplierStandard	799
103104104100189	41	2,160	Bright	sZ	1,629	SupplierStandard	799
103104103100189	41	2,160	Bright	zS	1,629	SupplierStandard	799
103104104300189	41	2,160	Galvanized	sZ	1,629	SupplierStandard	799
103104103300189	41	2,160	Galvanized	zS	1,629	SupplierStandard	799
103104204050189	42	1,770	Bright	sZ	1,418	SupplierStandard	838
103104203050189	42	1,770	Bright	zS	1,418	SupplierStandard	838
103104204250189	42	1,770	Galvanized	sZ	1,418	SupplierStandard	838
103104203250189	42	1,770	Galvanized	zS	1,418	SupplierStandard	838
103104204070189	42	1,960	Bright	sZ	1,574	SupplierStandard	838
103104203070189	42	1,960	Bright	zS	1,574	SupplierStandard	838
103104204270189	42	1,960	Galvanized	sZ	1,574	SupplierStandard	838
103104203270189	42	1,960	Galvanized	zS	1,574	SupplierStandard	838
103104204100189	42	2,160	Bright	sZ	1,713	SupplierStandard	838
103104203100189	42	2,160	Bright	zS	1,713	SupplierStandard	838
103104204300189	42	2,160	Galvanized	sZ	1,713	SupplierStandard	838
103104203300189	42	2,160	Galvanized	zS	1,713	SupplierStandard	838
103104304050189	43	1,770	Bright	sZ	1,486	SupplierStandard	879
103104303050189	43	1,770	Bright	zS	1,486	SupplierStandard	879
103104304250189	43	1,770	Galvanized	sZ	1,486	SupplierStandard	879
103104303250189	43	1,770	Galvanized	zS	1,486	SupplierStandard	879
103104304070189	43	1,960	Bright	sZ	1,645	SupplierStandard	879
103104303070189	43	1,960	Bright	zS	1,645	SupplierStandard	879
103104304270189	43	1,960	Galvanized	sZ	1,645	SupplierStandard	879
103104303270189	43	1,960	Galvanized	zS	1,645	SupplierStandard	879
103104304100189	43	2,160	Bright	sZ	1,792	SupplierStandard	879
103104303100189	43	2,160	Bright	zS	1,792	SupplierStandard	879
103104304300189	43	2,160	Galvanized	sZ	1,792	SupplierStandard	879

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104303300189	43	2,160	Galvanized	zS	1,792	SupplierStandard	879
103104404050189	44	1,770	Bright	sZ	1,556	SupplierStandard	920
103104403050189	44	1,770	Bright	zS	1,556	SupplierStandard	920
103104404250189	44	1,770	Galvanized	sZ	1,556	SupplierStandard	920
103104403250189	44	1,770	Galvanized	zS	1,556	SupplierStandard	920
103104404070189	44	1,960	Bright	sZ	1,723	SupplierStandard	920
103104403070189	44	1,960	Bright	zS	1,723	SupplierStandard	920
103104404270189	44	1,960	Galvanized	sZ	1,723	SupplierStandard	920
103104403270189	44	1,960	Galvanized	zS	1,723	SupplierStandard	920
103104404100189	44	2,160	Bright	sZ	1,876	SupplierStandard	920
103104403100189	44	2,160	Bright	zS	1,876	SupplierStandard	920
103104404300189	44	2,160	Galvanized	sZ	1,876	SupplierStandard	920
103104403300189	44	2,160	Galvanized	zS	1,876	SupplierStandard	920
103104504050189	45	1,770	Bright	sZ	1,615	SupplierStandard	955
103104503050189	45	1,770	Bright	zS	1,615	SupplierStandard	955
103104504250189	45	1,770	Galvanized	sZ	1,615	SupplierStandard	955
103104503250189	45	1,770	Galvanized	zS	1,615	SupplierStandard	955
103104504070189	45	1,960	Bright	sZ	1,788	SupplierStandard	955
103104503070189	45	1,960	Bright	zS	1,788	SupplierStandard	955
103104504270189	45	1,960	Galvanized	sZ	1,788	SupplierStandard	955
103104503270189	45	1,960	Galvanized	zS	1,788	SupplierStandard	955
103104504100189	45	2,160	Bright	sZ	1,948	SupplierStandard	955
103104503100189	45	2,160	Bright	zS	1,948	SupplierStandard	955
103104504300189	45	2,160	Galvanized	sZ	1,948	SupplierStandard	955
103104503300189	45	2,160	Galvanized	zS	1,948	SupplierStandard	955
103104604050189	46	1,770	Bright	sZ	1,700	SupplierStandard	1,006
103104603050189	46	1,770	Bright	zS	1,700	SupplierStandard	1,006
103104604250189	46	1,770	Galvanized	sZ	1,700	SupplierStandard	1,006
103104603250189	46	1,770	Galvanized	zS	1,700	SupplierStandard	1,006
103104604070189	46	1,960	Bright	sZ	1,883	SupplierStandard	1,006
103104603070189	46	1,960	Bright	zS	1,883	SupplierStandard	1,006

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104604270189	46	1,960	Galvanized	sZ	1,883	SupplierStandard	1,006
103104603270189	46	1,960	Galvanized	zS	1,883	SupplierStandard	1,006
103104604100189	46	2,160	Bright	sZ	2,050	SupplierStandard	1,006
103104603100189	46	2,160	Bright	zS	2,050	SupplierStandard	1,006
103104604300189	46	2,160	Galvanized	sZ	2,050	SupplierStandard	1,006
103104603300189	46	2,160	Galvanized	zS	2,050	SupplierStandard	1,006
103104704050189	47	1,770	Bright	sZ	1,762	SupplierStandard	1,042
103104703050189	47	1,770	Bright	zS	1,762	SupplierStandard	1,042
103104704250189	47	1,770	Galvanized	sZ	1,762	SupplierStandard	1,042
103104703250189	47	1,770	Galvanized	zS	1,762	SupplierStandard	1,042
103104704070189	47	1,960	Bright	sZ	1,951	SupplierStandard	1,042
103104703070189	47	1,960	Bright	zS	1,951	SupplierStandard	1,042
103104704270189	47	1,960	Galvanized	sZ	1,951	SupplierStandard	1,042
103104703270189	47	1,960	Galvanized	zS	1,951	SupplierStandard	1,042
103104704100189	47	2,160	Bright	sZ	2,125	SupplierStandard	1,042
103104703100189	47	2,160	Bright	zS	2,125	SupplierStandard	1,042
103104704300189	47	2,160	Galvanized	sZ	2,125	SupplierStandard	1,042
103104703300189	47	2,160	Galvanized	zS	2,125	SupplierStandard	1,042
103104804050189	48	1,770	Bright	sZ	1,851	SupplierStandard	1,095
103104803050189	48	1,770	Bright	zS	1,851	SupplierStandard	1,095
103104804250189	48	1,770	Galvanized	sZ	1,851	SupplierStandard	1,095
103104803250189	48	1,770	Galvanized	zS	1,851	SupplierStandard	1,095
103104804070189	48	1,960	Bright	sZ	2,050	SupplierStandard	1,095
103104803070189	48	1,960	Bright	zS	2,050	SupplierStandard	1,095
103104804270189	48	1,960	Galvanized	sZ	2,050	SupplierStandard	1,095
103104803270189	48	1,960	Galvanized	zS	2,050	SupplierStandard	1,095
103104804100189	48	2,160	Bright	sZ	2,233	SupplierStandard	1,095
103104803100189	48	2,160	Bright	zS	2,233	SupplierStandard	1,095
103104804300189	48	2,160	Galvanized	sZ	2,233	SupplierStandard	1,095
103104803300189	48	2,160	Galvanized	zS	2,233	SupplierStandard	1,095
103104904050189	49	1,770	Bright	sZ	1,915	SupplierStandard	1,133

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103104903050189	49	1,770	Bright	zS	1,915	SupplierStandard	1,133
103104904250189	49	1,770	Galvanized	sZ	1,915	SupplierStandard	1,133
103104903250189	49	1,770	Galvanized	zS	1,915	SupplierStandard	1,133
103104904070189	49	1,960	Bright	sZ	2,121	SupplierStandard	1,133
103104903070189	49	1,960	Bright	zS	2,121	SupplierStandard	1,133
103104904270189	49	1,960	Galvanized	sZ	2,121	SupplierStandard	1,133
103104903270189	49	1,960	Galvanized	zS	2,121	SupplierStandard	1,133
103104904100189	49	2,160	Bright	sZ	2,309	SupplierStandard	1,133
103104903100189	49	2,160	Bright	zS	2,309	SupplierStandard	1,133
103104904300189	49	2,160	Galvanized	sZ	2,309	SupplierStandard	1,133
103104903300189	49	2,160	Galvanized	zS	2,309	SupplierStandard	1,133
103105004050189	50	1,770	Bright	sZ	2,009	SupplierStandard	1,188
103105003050189	50	1,770	Bright	zS	2,009	SupplierStandard	1,188
103105004250189	50	1,770	Galvanized	sZ	2,009	SupplierStandard	1,188
103105003250189	50	1,770	Galvanized	zS	2,009	SupplierStandard	1,188
103105004070189	50	1,960	Bright	sZ	2,224	SupplierStandard	1,188
103105003070189	50	1,960	Bright	zS	2,224	SupplierStandard	1,188
103105004270189	50	1,960	Galvanized	sZ	2,224	SupplierStandard	1,188
103105003270189	50	1,960	Galvanized	zS	2,224	SupplierStandard	1,188
103105004100189	50	2,160	Bright	sZ	2,423	SupplierStandard	1,188
103105003100189	50	2,160	Bright	zS	2,423	SupplierStandard	1,188
103105004300189	50	2,160	Galvanized	sZ	2,423	SupplierStandard	1,188
103105003300189	50	2,160	Galvanized	zS	2,423	SupplierStandard	1,188
103105104050189	51	1,770	Bright	sZ	2,075	SupplierStandard	1,227
103105103050189	51	1,770	Bright	zS	2,075	SupplierStandard	1,227
103105104250189	51	1,770	Galvanized	sZ	2,075	SupplierStandard	1,227
103105103250189	51	1,770	Galvanized	zS	2,075	SupplierStandard	1,227
103105104070189	51	1,960	Bright	sZ	2,298	SupplierStandard	1,227
103105103070189	51	1,960	Bright	zS	2,298	SupplierStandard	1,227
103105104270189	51	1,960	Galvanized	sZ	2,298	SupplierStandard	1,227
103105103270189	51	1,960	Galvanized	zS	2,298	SupplierStandard	1,227

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105104100189	51	2,160	Bright	sZ	2,502	SupplierStandard	1,227
103105103100189	51	2,160	Bright	zS	2,502	SupplierStandard	1,227
103105104300189	51	2,160	Galvanized	sZ	2,502	SupplierStandard	1,227
103105103300189	51	2,160	Galvanized	zS	2,502	SupplierStandard	1,227
103105204050189	52	1,770	Bright	sZ	2,173	SupplierStandard	1,285
103105203050189	52	1,770	Bright	zS	2,173	SupplierStandard	1,285
103105204250189	52	1,770	Galvanized	sZ	2,173	SupplierStandard	1,285
103105203250189	52	1,770	Galvanized	zS	2,173	SupplierStandard	1,285
103105204070189	52	1,960	Bright	sZ	2,406	SupplierStandard	1,285
103105203070189	52	1,960	Bright	zS	2,406	SupplierStandard	1,285
103105204270189	52	1,960	Galvanized	sZ	2,406	SupplierStandard	1,285
103105203270189	52	1,960	Galvanized	zS	2,406	SupplierStandard	1,285
103105204100189	52	2,160	Bright	sZ	2,620	SupplierStandard	1,285
103105203100189	52	2,160	Bright	zS	2,620	SupplierStandard	1,285
103105204300189	52	2,160	Galvanized	sZ	2,620	SupplierStandard	1,285
103105203300189	52	2,160	Galvanized	zS	2,620	SupplierStandard	1,285
103105304050189	53	1,770	Bright	sZ	2,241	SupplierStandard	1,325
103105303050189	53	1,770	Bright	zS	2,241	SupplierStandard	1,325
103105304250189	53	1,770	Galvanized	sZ	2,241	SupplierStandard	1,325
103105303250189	53	1,770	Galvanized	zS	2,241	SupplierStandard	1,325
103105304070189	53	1,960	Bright	sZ	2,481	SupplierStandard	1,325
103105303070189	53	1,960	Bright	zS	2,481	SupplierStandard	1,325
103105304270189	53	1,960	Galvanized	sZ	2,481	SupplierStandard	1,325
103105303270189	53	1,960	Galvanized	zS	2,481	SupplierStandard	1,325
103105304100189	53	2,160	Bright	sZ	2,702	SupplierStandard	1,325
103105303100189	53	2,160	Bright	zS	2,702	SupplierStandard	1,325
103105304300189	53	2,160	Galvanized	sZ	2,702	SupplierStandard	1,325
103105303300189	53	2,160	Galvanized	zS	2,702	SupplierStandard	1,325
103105404050189	54	1,770	Bright	sZ	2,343	SupplierStandard	1,386
103105403050189	54	1,770	Bright	zS	2,343	SupplierStandard	1,386
103105404250189	54	1,770	Galvanized	sZ	2,343	SupplierStandard	1,386

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105403250189	54	1,770	Galvanized	zS	2,343	SupplierStandard	1,386
103105404070189	54	1,960	Bright	sZ	2,594	SupplierStandard	1,386
103105403070189	54	1,960	Bright	zS	2,594	SupplierStandard	1,386
103105404270189	54	1,960	Galvanized	sZ	2,594	SupplierStandard	1,386
103105403270189	54	1,960	Galvanized	zS	2,594	SupplierStandard	1,386
103105404100189	54	2,160	Bright	sZ	2,826	SupplierStandard	1,386
103105403100189	54	2,160	Bright	zS	2,826	SupplierStandard	1,386
103105404300189	54	2,160	Galvanized	sZ	2,826	SupplierStandard	1,386
103105403300189	54	2,160	Galvanized	zS	2,826	SupplierStandard	1,386
103105504050189	55	1,770	Bright	sZ	2,413	SupplierStandard	1,427
103105503050189	55	1,770	Bright	zS	2,413	SupplierStandard	1,427
103105504250189	55	1,770	Galvanized	sZ	2,413	SupplierStandard	1,427
103105503250189	55	1,770	Galvanized	zS	2,413	SupplierStandard	1,427
103105504070189	55	1,960	Bright	sZ	2,672	SupplierStandard	1,427
103105503070189	55	1,960	Bright	zS	2,672	SupplierStandard	1,427
103105504270189	55	1,960	Galvanized	sZ	2,672	SupplierStandard	1,427
103105503270189	55	1,960	Galvanized	zS	2,672	SupplierStandard	1,427
103105504100189	55	2,160	Bright	sZ	2,910	SupplierStandard	1,427
103105503100189	55	2,160	Bright	zS	2,910	SupplierStandard	1,427
103105504300189	55	2,160	Galvanized	sZ	2,910	SupplierStandard	1,427
103105503300189	55	2,160	Galvanized	zS	2,910	SupplierStandard	1,427
103105604050189	56	1,770	Bright	sZ	2,519	SupplierStandard	1,491
103105603050189	56	1,770	Bright	zS	2,519	SupplierStandard	1,491
103105604250189	56	1,770	Galvanized	sZ	2,519	SupplierStandard	1,491
103105603250189	56	1,770	Galvanized	zS	2,519	SupplierStandard	1,491
103105604070189	56	1,960	Bright	sZ	2,791	SupplierStandard	1,491
103105603070189	56	1,960	Bright	zS	2,791	SupplierStandard	1,491
103105604270189	56	1,960	Galvanized	sZ	2,791	SupplierStandard	1,491
103105603270189	56	1,960	Galvanized	zS	2,791	SupplierStandard	1,491
103105604100189	56	2,160	Bright	sZ	3,039	SupplierStandard	1,491
103105603100189	56	2,160	Bright	zS	3,039	SupplierStandard	1,491

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105604300189	56	2,160	Galvanized	sZ	3,039	SupplierStandard	1,491
103105603300189	56	2,160	Galvanized	zS	3,039	SupplierStandard	1,491
103105704050189	57	1,770	Bright	sZ	2,592	SupplierStandard	1,533
103105703050189	57	1,770	Bright	zS	2,592	SupplierStandard	1,533
103105704250189	57	1,770	Galvanized	sZ	2,592	SupplierStandard	1,533
103105703250189	57	1,770	Galvanized	zS	2,592	SupplierStandard	1,533
103105704070189	57	1,960	Bright	sZ	2,870	SupplierStandard	1,533
103105703070189	57	1,960	Bright	zS	2,870	SupplierStandard	1,533
103105704270189	57	1,960	Galvanized	sZ	2,870	SupplierStandard	1,533
103105703270189	57	1,960	Galvanized	zS	2,870	SupplierStandard	1,533
103105704100189	57	2,160	Bright	sZ	3,125	SupplierStandard	1,533
103105703100189	57	2,160	Bright	zS	3,125	SupplierStandard	1,533
103105704300189	57	2,160	Galvanized	sZ	3,125	SupplierStandard	1,533
103105703300189	57	2,160	Galvanized	zS	3,125	SupplierStandard	1,533
103105804050189	58	1,770	Bright	sZ	2,703	SupplierStandard	1,599
103105803050189	58	1,770	Bright	zS	2,703	SupplierStandard	1,599
103105804250189	58	1,770	Galvanized	sZ	2,703	SupplierStandard	1,599
103105803250189	58	1,770	Galvanized	zS	2,703	SupplierStandard	1,599
103105804070189	58	1,960	Bright	sZ	2,993	SupplierStandard	1,599
103105803070189	58	1,960	Bright	zS	2,993	SupplierStandard	1,599
103105804270189	58	1,960	Galvanized	sZ	2,993	SupplierStandard	1,599
103105803270189	58	1,960	Galvanized	zS	2,993	SupplierStandard	1,599
103105804100189	58	2,160	Bright	sZ	3,260	SupplierStandard	1,599
103105803100189	58	2,160	Bright	zS	3,260	SupplierStandard	1,599
103105804300189	58	2,160	Galvanized	sZ	3,260	SupplierStandard	1,599
103105803300189	58	2,160	Galvanized	zS	3,260	SupplierStandard	1,599
103105904050189	59	1,770	Bright	sZ	2,776	SupplierStandard	1,642
103105903050189	59	1,770	Bright	zS	2,776	SupplierStandard	1,642
103105904250189	59	1,770	Galvanized	sZ	2,776	SupplierStandard	1,642
103105903250189	59	1,770	Galvanized	zS	2,776	SupplierStandard	1,642
103105904070189	59	1,960	Bright	sZ	3,074	SupplierStandard	1,642

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103105903070189	59	1,960	Bright	zS	3,074	SupplierStandard	1,642
103105904270189	59	1,960	Galvanized	sZ	3,074	SupplierStandard	1,642
103105903270189	59	1,960	Galvanized	zS	3,074	SupplierStandard	1,642
103105904100189	59	2,160	Bright	sZ	3,348	SupplierStandard	1,642
103105903100189	59	2,160	Bright	zS	3,348	SupplierStandard	1,642
103105904300189	59	2,160	Galvanized	sZ	3,348	SupplierStandard	1,642
103105903300189	59	2,160	Galvanized	zS	3,348	SupplierStandard	1,642
103106004050189	60	1,770	Bright	sZ	2,893	SupplierStandard	1,711
103106003050189	60	1,770	Bright	zS	2,893	SupplierStandard	1,711
103106004250189	60	1,770	Galvanized	sZ	2,893	SupplierStandard	1,711
103106003250189	60	1,770	Galvanized	zS	2,893	SupplierStandard	1,711
103106004070189	60	1,960	Bright	sZ	3,203	SupplierStandard	1,711
103106003070189	60	1,960	Bright	zS	3,203	SupplierStandard	1,711
103106004270189	60	1,960	Galvanized	sZ	3,203	SupplierStandard	1,711
103106003270189	60	1,960	Galvanized	zS	3,203	SupplierStandard	1,711
103106004100189	60	2,160	Bright	sZ	3,489	SupplierStandard	1,711
103106003100189	60	2,160	Bright	zS	3,489	SupplierStandard	1,711
103106004300189	60	2,160	Galvanized	sZ	3,489	SupplierStandard	1,711
103106003300189	60	2,160	Galvanized	zS	3,489	SupplierStandard	1,711
103106104050189	61	1,770	Bright	sZ	2,968	SupplierStandard	1,756
103106103050189	61	1,770	Bright	zS	2,968	SupplierStandard	1,756
103106104250189	61	1,770	Galvanized	sZ	2,968	SupplierStandard	1,756
103106103250189	61	1,770	Galvanized	zS	2,968	SupplierStandard	1,756
103106104070189	61	1,960	Bright	sZ	3,286	SupplierStandard	1,756
103106103070189	61	1,960	Bright	zS	3,286	SupplierStandard	1,756
103106104270189	61	1,960	Galvanized	sZ	3,286	SupplierStandard	1,756
103106103270189	61	1,960	Galvanized	zS	3,286	SupplierStandard	1,756
103106104100189	61	2,160	Bright	sZ	3,579	SupplierStandard	1,756
103106103100189	61	2,160	Bright	zS	3,579	SupplierStandard	1,756
103106104300189	61	2,160	Galvanized	sZ	3,579	SupplierStandard	1,756
103106103300189	61	2,160	Galvanized	zS	3,579	SupplierStandard	1,756

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106204050189	62	1,770	Bright	sZ	3,089	SupplierStandard	1,827
103106203050189	62	1,770	Bright	zS	3,089	SupplierStandard	1,827
103106204250189	62	1,770	Galvanized	sZ	3,089	SupplierStandard	1,827
103106203250189	62	1,770	Galvanized	zS	3,089	SupplierStandard	1,827
103106204070189	62	1,960	Bright	sZ	3,420	SupplierStandard	1,827
103106203070189	62	1,960	Bright	zS	3,420	SupplierStandard	1,827
103106204270189	62	1,960	Galvanized	sZ	3,420	SupplierStandard	1,827
103106203270189	62	1,960	Galvanized	zS	3,420	SupplierStandard	1,827
103106204100189	62	2,160	Bright	sZ	3,725	SupplierStandard	1,827
103106203100189	62	2,160	Bright	zS	3,725	SupplierStandard	1,827
103106204300189	62	2,160	Galvanized	sZ	3,725	SupplierStandard	1,827
103106203300189	62	2,160	Galvanized	zS	3,725	SupplierStandard	1,827
103106304050189	63	1,770	Bright	sZ	3,165	SupplierStandard	1,873
103106303050189	63	1,770	Bright	zS	3,165	SupplierStandard	1,873
103106304250189	63	1,770	Galvanized	sZ	3,165	SupplierStandard	1,873
103106303250189	63	1,770	Galvanized	zS	3,165	SupplierStandard	1,873
103106304070189	63	1,960	Bright	sZ	3,505	SupplierStandard	1,873
103106303070189	63	1,960	Bright	zS	3,505	SupplierStandard	1,873
103106304270189	63	1,960	Galvanized	sZ	3,505	SupplierStandard	1,873
103106303270189	63	1,960	Galvanized	zS	3,505	SupplierStandard	1,873
103106304100189	63	2,160	Bright	sZ	3,818	SupplierStandard	1,873
103106303100189	63	2,160	Bright	zS	3,818	SupplierStandard	1,873
103106304300189	63	2,160	Galvanized	sZ	3,818	SupplierStandard	1,873
103106303300189	63	2,160	Galvanized	zS	3,818	SupplierStandard	1,873
103106404050189	64	1,770	Bright	sZ	3,291	SupplierStandard	1,947
103106403050189	64	1,770	Bright	zS	3,291	SupplierStandard	1,947
103106404250189	64	1,770	Galvanized	sZ	3,291	SupplierStandard	1,947
103106403250189	64	1,770	Galvanized	zS	3,291	SupplierStandard	1,947
103106404070189	64	1,960	Bright	sZ	3,645	SupplierStandard	1,947
103106403070189	64	1,960	Bright	zS	3,645	SupplierStandard	1,947
103106404270189	64	1,960	Galvanized	sZ	3,645	SupplierStandard	1,947

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106403270189	64	1,960	Galvanized	zS	3,645	SupplierStandard	1,947
103106404100189	64	2,160	Bright	sZ	3,969	SupplierStandard	1,947
103106403100189	64	2,160	Bright	zS	3,969	SupplierStandard	1,947
103106404300189	64	2,160	Galvanized	sZ	3,969	SupplierStandard	1,947
103106403300189	64	2,160	Galvanized	zS	3,969	SupplierStandard	1,947
103106504050189	65	1,770	Bright	sZ	3,370	SupplierStandard	1,993
103106503050189	65	1,770	Bright	zS	3,370	SupplierStandard	1,993
103106504250189	65	1,770	Galvanized	sZ	3,370	SupplierStandard	1,993
103106503250189	65	1,770	Galvanized	zS	3,370	SupplierStandard	1,993
103106504070189	65	1,960	Bright	sZ	3,732	SupplierStandard	1,993
103106503070189	65	1,960	Bright	zS	3,732	SupplierStandard	1,993
103106504270189	65	1,960	Galvanized	sZ	3,732	SupplierStandard	1,993
103106503270189	65	1,960	Galvanized	zS	3,732	SupplierStandard	1,993
103106504100189	65	2,160	Bright	sZ	4,064	SupplierStandard	1,993
103106503100189	65	2,160	Bright	zS	4,064	SupplierStandard	1,993
103106504300189	65	2,160	Galvanized	sZ	4,064	SupplierStandard	1,993
103106503300189	65	2,160	Galvanized	zS	4,064	SupplierStandard	1,993
103106604050189	66	1,770	Bright	sZ	3,500	SupplierStandard	2,071
103106603050189	66	1,770	Bright	zS	3,500	SupplierStandard	2,071
103106604250189	66	1,770	Galvanized	sZ	3,500	SupplierStandard	2,071
103106603250189	66	1,770	Galvanized	zS	3,500	SupplierStandard	2,071
103106604070189	66	1,960	Bright	sZ	3,876	SupplierStandard	2,071
103106603070189	66	1,960	Bright	zS	3,876	SupplierStandard	2,071
103106604270189	66	1,960	Galvanized	sZ	3,876	SupplierStandard	2,071
103106603270189	66	1,960	Galvanized	zS	3,876	SupplierStandard	2,071
103106604100189	66	2,160	Bright	sZ	4,221	SupplierStandard	2,071
103106603100189	66	2,160	Bright	zS	4,221	SupplierStandard	2,071
103106604300189	66	2,160	Galvanized	sZ	4,221	SupplierStandard	2,071
103106603300189	66	2,160	Galvanized	zS	4,221	SupplierStandard	2,071
103106704050189	67	1,770	Bright	sZ	3,580	SupplierStandard	2,118
103106703050189	67	1,770	Bright	zS	3,580	SupplierStandard	2,118

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106704250189	67	1,770	Galvanized	sZ	3,580	SupplierStandard	2,118
103106703250189	67	1,770	Galvanized	zS	3,580	SupplierStandard	2,118
103106704070189	67	1,960	Bright	sZ	3,964	SupplierStandard	2,118
103106703070189	67	1,960	Bright	zS	3,964	SupplierStandard	2,118
103106704270189	67	1,960	Galvanized	sZ	3,964	SupplierStandard	2,118
103106703270189	67	1,960	Galvanized	zS	3,964	SupplierStandard	2,118
103106704100189	67	2,160	Bright	sZ	4,318	SupplierStandard	2,118
103106703100189	67	2,160	Bright	zS	4,318	SupplierStandard	2,118
103106704300189	67	2,160	Galvanized	sZ	4,318	SupplierStandard	2,118
103106703300189	67	2,160	Galvanized	zS	4,318	SupplierStandard	2,118
103106804050189	68	1,770	Bright	sZ	3,715	SupplierStandard	2,198
103106803050189	68	1,770	Bright	zS	3,715	SupplierStandard	2,198
103106804250189	68	1,770	Galvanized	sZ	3,715	SupplierStandard	2,198
103106803250189	68	1,770	Galvanized	zS	3,715	SupplierStandard	2,198
103106804070189	68	1,960	Bright	sZ	4,114	SupplierStandard	2,198
103106803070189	68	1,960	Bright	zS	4,114	SupplierStandard	2,198
103106804270189	68	1,960	Galvanized	sZ	4,114	SupplierStandard	2,198
103106803270189	68	1,960	Galvanized	zS	4,114	SupplierStandard	2,198
103106804100189	68	2,160	Bright	sZ	4,481	SupplierStandard	2,198
103106803100189	68	2,160	Bright	zS	4,481	SupplierStandard	2,198
103106804300189	68	2,160	Galvanized	sZ	4,481	SupplierStandard	2,198
103106803300189	68	2,160	Galvanized	zS	4,481	SupplierStandard	2,198
103106904050189	69	1,770	Bright	sZ	3,798	SupplierStandard	2,246
103106903050189	69	1,770	Bright	zS	3,798	SupplierStandard	2,246
103106904250189	69	1,770	Galvanized	sZ	3,798	SupplierStandard	2,246
103106903250189	69	1,770	Galvanized	zS	3,798	SupplierStandard	2,246
103106904070189	69	1,960	Bright	sZ	4,205	SupplierStandard	2,246
103106903070189	69	1,960	Bright	zS	4,205	SupplierStandard	2,246
103106904270189	69	1,960	Galvanized	sZ	4,205	SupplierStandard	2,246
103106903270189	69	1,960	Galvanized	zS	4,205	SupplierStandard	2,246
103106904100189	69	2,160	Bright	sZ	4,580	SupplierStandard	2,246

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103106903100189	69	2,160	Bright	zS	4,580	SupplierStandard	2,246
103106904300189	69	2,160	Galvanized	sZ	4,580	SupplierStandard	2,246
103106903300189	69	2,160	Galvanized	zS	4,580	SupplierStandard	2,246
103107004050189	70	1,770	Bright	sZ	3,937	SupplierStandard	2,329
103107003050189	70	1,770	Bright	zS	3,937	SupplierStandard	2,329
103107004250189	70	1,770	Galvanized	sZ	3,937	SupplierStandard	2,329
103107003250189	70	1,770	Galvanized	zS	3,937	SupplierStandard	2,329
103107004070189	70	1,960	Bright	sZ	4,360	SupplierStandard	2,329
103107003070189	70	1,960	Bright	zS	4,360	SupplierStandard	2,329
103107004270189	70	1,960	Galvanized	sZ	4,360	SupplierStandard	2,329
103107003270189	70	1,960	Galvanized	zS	4,360	SupplierStandard	2,329
103107004100189	70	2,160	Bright	sZ	4,749	SupplierStandard	2,329
103107003100189	70	2,160	Bright	zS	4,749	SupplierStandard	2,329
103107004300189	70	2,160	Galvanized	sZ	4,749	SupplierStandard	2,329
103107003300189	70	2,160	Galvanized	zS	4,749	SupplierStandard	2,329
103107104050189	71	1,770	Bright	sZ	4,021	SupplierStandard	2,378
103107103050189	71	1,770	Bright	zS	4,021	SupplierStandard	2,378
103107104250189	71	1,770	Galvanized	sZ	4,021	SupplierStandard	2,378
103107103250189	71	1,770	Galvanized	zS	4,021	SupplierStandard	2,378
103107104070189	71	1,960	Bright	sZ	4,452	SupplierStandard	2,378
103107103070189	71	1,960	Bright	zS	4,452	SupplierStandard	2,378
103107104270189	71	1,960	Galvanized	sZ	4,452	SupplierStandard	2,378
103107103270189	71	1,960	Galvanized	zS	4,452	SupplierStandard	2,378
103107104100189	71	2,160	Bright	sZ	4,849	SupplierStandard	2,378
103107103100189	71	2,160	Bright	zS	4,849	SupplierStandard	2,378
103107104300189	71	2,160	Galvanized	sZ	4,849	SupplierStandard	2,378
103107103300189	71	2,160	Galvanized	zS	4,849	SupplierStandard	2,378
103107204050189	72	1,770	Bright	sZ	4,134	SupplierStandard	2,446
103107203050189	72	1,770	Bright	zS	4,134	SupplierStandard	2,446
103107204250189	72	1,770	Galvanized	sZ	4,134	SupplierStandard	2,446
103107203250189	72	1,770	Galvanized	zS	4,134	SupplierStandard	2,446

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103107204070189	72	1,960	Bright	sZ	4,579	SupplierStandard	2,446
103107203070189	72	1,960	Bright	zS	4,579	SupplierStandard	2,446
103107204270189	72	1,960	Galvanized	sZ	4,579	SupplierStandard	2,446
103107203270189	72	1,960	Galvanized	zS	4,579	SupplierStandard	2,446
103107204100189	72	2,160	Bright	sZ	4,986	SupplierStandard	2,446
103107203100189	72	2,160	Bright	zS	4,986	SupplierStandard	2,446
103107204300189	72	2,160	Galvanized	sZ	4,986	SupplierStandard	2,446
103107203300189	72	2,160	Galvanized	zS	4,986	SupplierStandard	2,446
103107304050189	73	1,770	Bright	sZ	4,251	SupplierStandard	2,514
103107303050189	73	1,770	Bright	zS	4,251	SupplierStandard	2,514
103107304250189	73	1,770	Galvanized	sZ	4,251	SupplierStandard	2,514
103107303250189	73	1,770	Galvanized	zS	4,251	SupplierStandard	2,514
103107304070189	73	1,960	Bright	sZ	4,706	SupplierStandard	2,514
103107303070189	73	1,960	Bright	zS	4,706	SupplierStandard	2,514
103107304270189	73	1,960	Galvanized	sZ	4,706	SupplierStandard	2,514
103107303270189	73	1,960	Galvanized	zS	4,706	SupplierStandard	2,514
103107304100189	73	2,160	Bright	sZ	5,126	SupplierStandard	2,514
103107303100189	73	2,160	Bright	zS	5,126	SupplierStandard	2,514
103107304300189	73	2,160	Galvanized	sZ	5,126	SupplierStandard	2,514
103107303300189	73	2,160	Galvanized	zS	5,126	SupplierStandard	2,514
103107404050189	74	1,770	Bright	sZ	4,367	SupplierStandard	2,584
103107403050189	74	1,770	Bright	zS	4,367	SupplierStandard	2,584
103107404250189	74	1,770	Galvanized	sZ	4,367	SupplierStandard	2,584
103107403250189	74	1,770	Galvanized	zS	4,367	SupplierStandard	2,584
103107404070189	74	1,960	Bright	sZ	4,837	SupplierStandard	2,584
103107403070189	74	1,960	Bright	zS	4,837	SupplierStandard	2,584
103107404270189	74	1,960	Galvanized	sZ	4,837	SupplierStandard	2,584
103107403270189	74	1,960	Galvanized	zS	4,837	SupplierStandard	2,584
103107404100189	74	2,160	Bright	sZ	5,268	SupplierStandard	2,584
103107403100189	74	2,160	Bright	zS	5,268	SupplierStandard	2,584
103107404300189	74	2,160	Galvanized	sZ	5,268	SupplierStandard	2,584

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103107403300189	74	2,160	Galvanized	zS	5,268	SupplierStandard	2,584
103107504050189	75	1,770	Bright	sZ	4,486	SupplierStandard	2,654
103107503050189	75	1,770	Bright	zS	4,486	SupplierStandard	2,654
103107504250189	75	1,770	Galvanized	sZ	4,486	SupplierStandard	2,654
103107503250189	75	1,770	Galvanized	zS	4,486	SupplierStandard	2,654
103107504070189	75	1,960	Bright	sZ	4,968	SupplierStandard	2,654
103107503070189	75	1,960	Bright	zS	4,968	SupplierStandard	2,654
103107504270189	75	1,960	Galvanized	sZ	4,968	SupplierStandard	2,654
103107503270189	75	1,960	Galvanized	zS	4,968	SupplierStandard	2,654
103107504100189	75	2,160	Bright	sZ	5,410	SupplierStandard	2,654
103107503100189	75	2,160	Bright	zS	5,410	SupplierStandard	2,654
103107504300189	75	2,160	Galvanized	sZ	5,410	SupplierStandard	2,654
103107503300189	75	2,160	Galvanized	zS	5,410	SupplierStandard	2,654
103107604050189	76	1,770	Bright	sZ	4,607	SupplierStandard	2,725
103107603050189	76	1,770	Bright	zS	4,607	SupplierStandard	2,725
103107604250189	76	1,770	Galvanized	sZ	4,607	SupplierStandard	2,725
103107603250189	76	1,770	Galvanized	zS	4,607	SupplierStandard	2,725
103107604070189	76	1,960	Bright	sZ	5,102	SupplierStandard	2,725
103107603070189	76	1,960	Bright	zS	5,102	SupplierStandard	2,725
103107604270189	76	1,960	Galvanized	sZ	5,102	SupplierStandard	2,725
103107603270189	76	1,960	Galvanized	zS	5,102	SupplierStandard	2,725
103107704050189	77	1,770	Bright	sZ	4,729	SupplierStandard	2,797
103107703050189	77	1,770	Bright	zS	4,729	SupplierStandard	2,797
103107704250189	77	1,770	Galvanized	sZ	4,729	SupplierStandard	2,797
103107703250189	77	1,770	Galvanized	zS	4,729	SupplierStandard	2,797
103107704070189	77	1,960	Bright	sZ	5,237	SupplierStandard	2,797
103107703070189	77	1,960	Bright	zS	5,237	SupplierStandard	2,797
103107704270189	77	1,960	Galvanized	sZ	5,237	SupplierStandard	2,797
103107703270189	77	1,960	Galvanized	zS	5,237	SupplierStandard	2,797
103107804050189	78	1,770	Bright	sZ	4,853	SupplierStandard	2,871
103107803050189	78	1,770	Bright	zS	4,853	SupplierStandard	2,871

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103107804250189	78	1,770	Galvanized	sZ	4,853	SupplierStandard	2,871
103107803250189	78	1,770	Galvanized	zS	4,853	SupplierStandard	2,871
103107804070189	78	1,960	Bright	sZ	5,374	SupplierStandard	2,871
103107803070189	78	1,960	Bright	zS	5,374	SupplierStandard	2,871
103107804270189	78	1,960	Galvanized	sZ	5,374	SupplierStandard	2,871
103107803270189	78	1,960	Galvanized	zS	5,374	SupplierStandard	2,871
103107904050189	79	1,770	Bright	sZ	4,978	SupplierStandard	2,945
103107903050189	79	1,770	Bright	zS	4,978	SupplierStandard	2,945
103107904250189	79	1,770	Galvanized	sZ	4,978	SupplierStandard	2,945
103107903250189	79	1,770	Galvanized	zS	4,978	SupplierStandard	2,945
103107904070189	79	1,960	Bright	sZ	5,512	SupplierStandard	2,945
103107903070189	79	1,960	Bright	zS	5,512	SupplierStandard	2,945
103107904270189	79	1,960	Galvanized	sZ	5,512	SupplierStandard	2,945
103107903270189	79	1,960	Galvanized	zS	5,512	SupplierStandard	2,945
103108004050189	80	1,770	Bright	sZ	5,104	SupplierStandard	3,020
103108003050189	80	1,770	Bright	zS	5,104	SupplierStandard	3,020
103108004250189	80	1,770	Galvanized	sZ	5,104	SupplierStandard	3,020
103108003250189	80	1,770	Galvanized	zS	5,104	SupplierStandard	3,020
103108004070189	80	1,960	Bright	sZ	5,653	SupplierStandard	3,020
103108003070189	80	1,960	Bright	zS	5,653	SupplierStandard	3,020
103108004270189	80	1,960	Galvanized	sZ	5,653	SupplierStandard	3,020
103108003270189	80	1,960	Galvanized	zS	5,653	SupplierStandard	3,020
103108104050189	81	1,770	Bright	sZ	5,233	SupplierStandard	3,096
103108103050189	81	1,770	Bright	zS	5,233	SupplierStandard	3,096
103108104250189	81	1,770	Galvanized	sZ	5,233	SupplierStandard	3,096
103108103250189	81	1,770	Galvanized	zS	5,233	SupplierStandard	3,096
103108104070189	81	1,960	Bright	sZ	5,794	SupplierStandard	3,096
103108103070189	81	1,960	Bright	zS	5,794	SupplierStandard	3,096
103108104270189	81	1,960	Galvanized	sZ	5,794	SupplierStandard	3,096
103108103270189	81	1,960	Galvanized	zS	5,794	SupplierStandard	3,096
103108204050189	82	1,770	Bright	sZ	5,364	SupplierStandard	3,173

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103108203050189	82	1,770	Bright	zS	5,364	SupplierStandard	3,173
103108204250189	82	1,770	Galvanized	sZ	5,364	SupplierStandard	3,173
103108203250189	82	1,770	Galvanized	zS	5,364	SupplierStandard	3,173
103108204070189	82	1,960	Bright	sZ	5,939	SupplierStandard	3,173
103108203070189	82	1,960	Bright	zS	5,939	SupplierStandard	3,173
103108204270189	82	1,960	Galvanized	sZ	5,939	SupplierStandard	3,173
103108203270189	82	1,960	Galvanized	zS	5,939	SupplierStandard	3,173
103108304050189	83	1,770	Bright	sZ	5,494	SupplierStandard	3,250
103108303050189	83	1,770	Bright	zS	5,494	SupplierStandard	3,250
103108304250189	83	1,770	Galvanized	sZ	5,494	SupplierStandard	3,250
103108303250189	83	1,770	Galvanized	zS	5,494	SupplierStandard	3,250
103108304070189	83	1,960	Bright	sZ	6,084	SupplierStandard	3,250
103108303070189	83	1,960	Bright	zS	6,084	SupplierStandard	3,250
103108304270189	83	1,960	Galvanized	sZ	6,084	SupplierStandard	3,250
103108303270189	83	1,960	Galvanized	zS	6,084	SupplierStandard	3,250
103108404050189	84	1,770	Bright	sZ	5,628	SupplierStandard	3,329
103108403050189	84	1,770	Bright	zS	5,628	SupplierStandard	3,329
103108404250189	84	1,770	Galvanized	sZ	5,628	SupplierStandard	3,329
103108403250189	84	1,770	Galvanized	zS	5,628	SupplierStandard	3,329
103108404070189	84	1,960	Bright	sZ	6,232	SupplierStandard	3,329
103108403070189	84	1,960	Bright	zS	6,232	SupplierStandard	3,329
103108404270189	84	1,960	Galvanized	sZ	6,232	SupplierStandard	3,329
103108403270189	84	1,960	Galvanized	zS	6,232	SupplierStandard	3,329
103108504050189	85	1,770	Bright	sZ	5,763	SupplierStandard	3,409
103108503050189	85	1,770	Bright	zS	5,763	SupplierStandard	3,409
103108504250189	85	1,770	Galvanized	sZ	5,763	SupplierStandard	3,409
103108503250189	85	1,770	Galvanized	zS	5,763	SupplierStandard	3,409
103108504070189	85	1,960	Bright	sZ	6,381	SupplierStandard	3,409
103108503070189	85	1,960	Bright	zS	6,381	SupplierStandard	3,409
103108504270189	85	1,960	Galvanized	sZ	6,381	SupplierStandard	3,409
103108503270189	85	1,960	Galvanized	zS	6,381	SupplierStandard	3,409

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103108604050189	86	1,770	Bright	sZ	5,899	SupplierStandard	3,490
103108603050189	86	1,770	Bright	zS	5,899	SupplierStandard	3,490
103108604250189	86	1,770	Galvanized	sZ	5,899	SupplierStandard	3,490
103108603250189	86	1,770	Galvanized	zS	5,899	SupplierStandard	3,490
103108604070189	86	1,960	Bright	sZ	6,532	SupplierStandard	3,490
103108603070189	86	1,960	Bright	zS	6,532	SupplierStandard	3,490
103108604270189	86	1,960	Galvanized	sZ	6,532	SupplierStandard	3,490
103108603270189	86	1,960	Galvanized	zS	6,532	SupplierStandard	3,490
103108704050189	87	1,770	Bright	sZ	6,037	SupplierStandard	3,571
103108703050189	87	1,770	Bright	zS	6,037	SupplierStandard	3,571
103108704250189	87	1,770	Galvanized	sZ	6,037	SupplierStandard	3,571
103108703250189	87	1,770	Galvanized	zS	6,037	SupplierStandard	3,571
103108704070189	87	1,960	Bright	sZ	6,685	SupplierStandard	3,571
103108703070189	87	1,960	Bright	zS	6,685	SupplierStandard	3,571
103108704270189	87	1,960	Galvanized	sZ	6,685	SupplierStandard	3,571
103108703270189	87	1,960	Galvanized	zS	6,685	SupplierStandard	3,571
103108804050189	88	1,770	Bright	sZ	6,177	SupplierStandard	3,654
103108803050189	88	1,770	Bright	zS	6,177	SupplierStandard	3,654
103108804250189	88	1,770	Galvanized	sZ	6,177	SupplierStandard	3,654
103108803250189	88	1,770	Galvanized	zS	6,177	SupplierStandard	3,654
103108804070189	88	1,960	Bright	sZ	6,840	SupplierStandard	3,654
103108803070189	88	1,960	Bright	zS	6,840	SupplierStandard	3,654
103108804270189	88	1,960	Galvanized	sZ	6,840	SupplierStandard	3,654
103108803270189	88	1,960	Galvanized	zS	6,840	SupplierStandard	3,654
103108904050189	89	1,770	Bright	sZ	6,318	SupplierStandard	3,737
103108903050189	89	1,770	Bright	zS	6,318	SupplierStandard	3,737
103108904250189	89	1,770	Galvanized	sZ	6,318	SupplierStandard	3,737
103108903250189	89	1,770	Galvanized	zS	6,318	SupplierStandard	3,737
103108904070189	89	1,960	Bright	sZ	6,996	SupplierStandard	3,737
103108903070189	89	1,960	Bright	zS	6,996	SupplierStandard	3,737
103108904270189	89	1,960	Galvanized	sZ	6,996	SupplierStandard	3,737

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103108903270189	89	1,960	Galvanized	zS	6,996	SupplierStandard	3,737
103109004050189	90	1,770	Bright	sZ	6,461	SupplierStandard	3,822
103109003050189	90	1,770	Bright	zS	6,461	SupplierStandard	3,822
103109004250189	90	1,770	Galvanized	sZ	6,461	SupplierStandard	3,822
103109003250189	90	1,770	Galvanized	zS	6,461	SupplierStandard	3,822
103109004070189	90	1,960	Bright	sZ	7,154	SupplierStandard	3,822
103109003070189	90	1,960	Bright	zS	7,154	SupplierStandard	3,822
103109004270189	90	1,960	Galvanized	sZ	7,154	SupplierStandard	3,822
103109003270189	90	1,960	Galvanized	zS	7,154	SupplierStandard	3,822
103109104050189	91	1,770	Bright	sZ	6,605	SupplierStandard	3,907
103109103050189	91	1,770	Bright	zS	6,605	SupplierStandard	3,907
103109104250189	91	1,770	Galvanized	sZ	6,605	SupplierStandard	3,907
103109103250189	91	1,770	Galvanized	zS	6,605	SupplierStandard	3,907
103109104070189	91	1,960	Bright	sZ	7,314	SupplierStandard	3,907
103109103070189	91	1,960	Bright	zS	7,314	SupplierStandard	3,907
103109104270189	91	1,960	Galvanized	sZ	7,314	SupplierStandard	3,907
103109103270189	91	1,960	Galvanized	zS	7,314	SupplierStandard	3,907
103109204050189	92	1,770	Bright	sZ	6,751	SupplierStandard	3,994
103109203050189	92	1,770	Bright	zS	6,751	SupplierStandard	3,994
103109204250189	92	1,770	Galvanized	sZ	6,751	SupplierStandard	3,994
103109203250189	92	1,770	Galvanized	zS	6,751	SupplierStandard	3,994
103109204070189	92	1,960	Bright	sZ	7,476	SupplierStandard	3,994
103109203070189	92	1,960	Bright	zS	7,476	SupplierStandard	3,994
103109204270189	92	1,960	Galvanized	sZ	7,476	SupplierStandard	3,994
103109203270189	92	1,960	Galvanized	zS	7,476	SupplierStandard	3,994
103109304050189	93	1,770	Bright	sZ	6,899	SupplierStandard	4,081
103109303050189	93	1,770	Bright	zS	6,899	SupplierStandard	4,081
103109304250189	93	1,770	Galvanized	sZ	6,899	SupplierStandard	4,081
103109303250189	93	1,770	Galvanized	zS	6,899	SupplierStandard	4,081
103109304070189	93	1,960	Bright	sZ	7,639	SupplierStandard	4,081
103109303070189	93	1,960	Bright	zS	7,639	SupplierStandard	4,081

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103109304270189	93	1,960	Galvanized	sZ	7,639	SupplierStandard	4,081
103109303270189	93	1,960	Galvanized	zS	7,639	SupplierStandard	4,081
103109404050189	94	1,770	Bright	sZ	7,047	SupplierStandard	4,169
103109403050189	94	1,770	Bright	zS	7,047	SupplierStandard	4,169
103109404250189	94	1,770	Galvanized	sZ	7,047	SupplierStandard	4,169
103109403250189	94	1,770	Galvanized	zS	7,047	SupplierStandard	4,169
103109404070189	94	1,960	Bright	sZ	7,804	SupplierStandard	4,169
103109403070189	94	1,960	Bright	zS	7,804	SupplierStandard	4,169
103109404270189	94	1,960	Galvanized	sZ	7,804	SupplierStandard	4,169
103109403270189	94	1,960	Galvanized	zS	7,804	SupplierStandard	4,169
103109504050189	95	1,770	Bright	sZ	7,199	SupplierStandard	4,258
103109503050189	95	1,770	Bright	zS	7,199	SupplierStandard	4,258
103109504250189	95	1,770	Galvanized	sZ	7,199	SupplierStandard	4,258
103109503250189	95	1,770	Galvanized	zS	7,199	SupplierStandard	4,258
103109504070189	95	1,960	Bright	sZ	7,971	SupplierStandard	4,258
103109503070189	95	1,960	Bright	zS	7,971	SupplierStandard	4,258
103109504270189	95	1,960	Galvanized	sZ	7,971	SupplierStandard	4,258
103109503270189	95	1,960	Galvanized	zS	7,971	SupplierStandard	4,258
103109604050189	96	1,770	Bright	sZ	7,351	SupplierStandard	4,348
103109603050189	96	1,770	Bright	zS	7,351	SupplierStandard	4,348
103109604250189	96	1,770	Galvanized	sZ	7,351	SupplierStandard	4,348
103109603250189	96	1,770	Galvanized	zS	7,351	SupplierStandard	4,348
103109604070189	96	1,960	Bright	sZ	8,140	SupplierStandard	4,348
103109603070189	96	1,960	Bright	zS	8,140	SupplierStandard	4,348
103109604270189	96	1,960	Galvanized	sZ	8,140	SupplierStandard	4,348
103109603270189	96	1,960	Galvanized	zS	8,140	SupplierStandard	4,348
103109704050189	97	1,770	Bright	sZ	7,505	SupplierStandard	4,439
103109703050189	97	1,770	Bright	zS	7,505	SupplierStandard	4,439
103109704250189	97	1,770	Galvanized	sZ	7,505	SupplierStandard	4,439
103109703250189	97	1,770	Galvanized	zS	7,505	SupplierStandard	4,439
103109704070189	97	1,960	Bright	sZ	8,310	SupplierStandard	4,439

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Steel wire rope Diepa X53 (PZ371)

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
103109703070189	97	1,960	Bright	zS	8,310	SupplierStandard	4,439
103109704270189	97	1,960	Galvanized	sZ	8,310	SupplierStandard	4,439
103109703270189	97	1,960	Galvanized	zS	8,310	SupplierStandard	4,439
103109804050189	98	1,770	Bright	sZ	7,660	SupplierStandard	4,531
103109803050189	98	1,770	Bright	zS	7,660	SupplierStandard	4,531
103109804250189	98	1,770	Galvanized	sZ	7,660	SupplierStandard	4,531
103109803250189	98	1,770	Galvanized	zS	7,660	SupplierStandard	4,531
103109804070189	98	1,960	Bright	sZ	8,482	SupplierStandard	4,531
103109803070189	98	1,960	Bright	zS	8,482	SupplierStandard	4,531
103109804270189	98	1,960	Galvanized	sZ	8,482	SupplierStandard	4,531
103109803270189	98	1,960	Galvanized	zS	8,482	SupplierStandard	4,531
103109904050189	99	1,770	Bright	sZ	7,817	SupplierStandard	4,624
103109903050189	99	1,770	Bright	zS	7,817	SupplierStandard	4,624
103109904250189	99	1,770	Galvanized	sZ	7,817	SupplierStandard	4,624
103109903250189	99	1,770	Galvanized	zS	7,817	SupplierStandard	4,624
103109904070189	99	1,960	Bright	sZ	8,656	SupplierStandard	4,624
103109903070189	99	1,960	Bright	zS	8,656	SupplierStandard	4,624
103109904270189	99	1,960	Galvanized	sZ	8,656	SupplierStandard	4,624
103109903270189	99	1,960	Galvanized	zS	8,656	SupplierStandard	4,624
103110004050189	100	1,770	Bright	sZ	7,976	SupplierStandard	4,718
103110003050189	100	1,770	Bright	zS	7,976	SupplierStandard	4,718
103110004250189	100	1,770	Galvanized	sZ	7,976	SupplierStandard	4,718
103110003250189	100	1,770	Galvanized	zS	7,976	SupplierStandard	4,718
103110004070189	100	1,960	Bright	sZ	8,832	SupplierStandard	4,718
103110003070189	100	1,960	Bright	zS	8,832	SupplierStandard	4,718
103110004270189	100	1,960	Galvanized	sZ	8,832	SupplierStandard	4,718
103110003270189	100	1,960	Galvanized	zS	8,832	SupplierStandard	4,718

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved