


## Lifting Chain Winner pro Pewag, Flex 200

### Product information

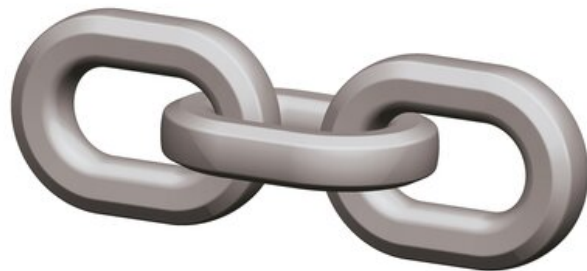

Profile steel chain in grade 12 for lifting.

**Features:** Strong, flexible and efficient.

**Material:** Alloy steel

**Marking:** Manufacturer ID, grade

**Temperature range:** -40°C up to +200°C.

**Finish:** Light grey powdercoated.

**Note:** Not to be heat-treated.

**Safety factor:** 4:1

**Grade:** 12

| Part code       | Chain diameter<br>mm | WLL<br>ton | Min. breaking force<br>kN | b1 min. | b2 max. | dn<br>mm | t<br>mm | Weight<br>kg | Delivery time |
|-----------------|----------------------|------------|---------------------------|---------|---------|----------|---------|--------------|---------------|
| 204100700000050 | 7                    | 2.36       | 92.6                      | 10      | 26      | 7        | 22      | 1.36         | 10            |
| 204101600000050 | 16                   | 12.5       | 491                       | 22.8    | 60      | 16       | 51      | 7.17         | 10            |

## Blueprint

