
Anti-slip Mat Kargotec® Protect

Product information

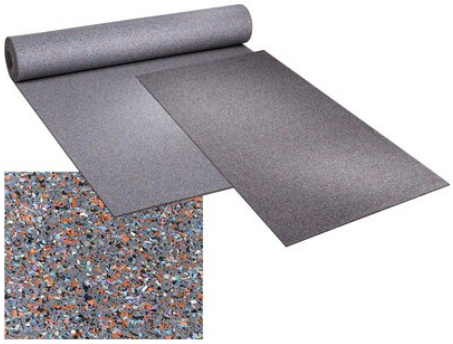

This anti-slip mat Kargotec® Protect, with an extremely high kinetic friction coefficient of μ = 0.91, is the ideal solution, because it optimally counters a horizontal movement of the load (sliding).

Thicknesses: 6-10 mm
Max. permissible surface load: approx. 0.8 N/mm² (DIN EN ISO 1798)
Elongation at break: At least 120% (DIN EN ISO 1798).

... *Read more*

Material: Recycled rubber granules, bonded with polyurethane
Temperature range: -30°C up to +100°C
Finish: Multi-coloured

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Anti-slip Mat Kargotec® Protect

Technical data

Part code	Dimensions mm	I'd like to have more information
70982720100	6X1250X10000	Kargotec Protect

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved