


## STA-ST Sandwich Anchor Starcon

### Product information

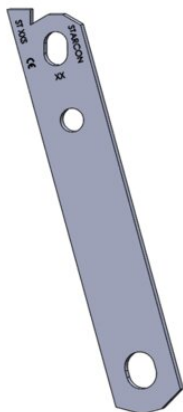

The Starcon STA-ST is perfect for prefabricated sandwich elements, as the suspension point is located near the center of gravity, ensuring upright transport and assembly.

The anchor head has a hole for mounting the ring coupling and additional holes for rebar reinforcement, allowing for a solid anchoring in the concrete element and application for various lifting applications. The STA-ST anchor is the optimal solution for transporting and mounting sandwich elements.

**Areas of application:** Sandwich elements

**Advantages:** Ensures that the sandwich element has minimal tilt during transport and assembly. Quick connection/disconnection with the former- and Starcon ring coupling, perfect for efficient transport and setup.

**Load group:** 2.5t – 17t

**Technical information:** CE marking according to MD 2006/42 EF

Starcon product is designed according to EN13155-2009 and follows the guidelines of VDI/BV-BS 6205 and DS/CEN/TR 15728.

**EPD:** Our Environmental Product Declarations (EPDs) are available in the LCA NO calculator/software. These EPDs have been prepared in strict accordance with ISO 14025 and EN 15804 standards.

**Download the EPDs from the LCA database:**

Untreated Products: [Starcon Lifting and Handling Systems for Concrete elements - Untreated - EPD Norge](#)

Surface treated Products: [Starcon Lifting and Handling Systems for Concrete elements - Surface Treated. - EPD Norge](#) ... [Read more](#)


**Marking:** CE-marked, batch code, load group + S(Starcon)

**Finish:** Untreated - Corrosion class C1 - ISO 12944-2. Hot-dip galvanized - Corrosion class C3 - ISO 12944-2

**Note:** The delivery time for the individual products is estimated and if the desired quantity is not in stock, please contact [CERTEX Danmark A/S – Starcon](#) for information on the applicable delivery time.

## STA-ST Sandwich Anchor Starcon

### Blueprint



### Technical data

Part code	Load grp. t	Length mm	Finish	a mm	b1 mm	b2 mm	c mm	L mm	r mm	Hole mm	Weight kg	Packing Qty.
65012502502501	2.5	250	Untreated	40	14	18	10	250	7	14x20	0.7	20
65012502502502	2.5	250	Hot dip galvanized	40	14	18	10	250	7	14x20	0.7	20
65012505003001	5	300	Untreated	60	18	26	15	300	9	18x22	1.89	8
65012505003002	5	300	Hot dip galvanized	60	18	26	15	300	9	18x22	1.89	8
65012507503501	7.5	350	Untreated	80	26	26	15	350	13	26x30	2.8	1
65012507503502	7.5	350	Hot dip galvanized	80	26	35	15	350	13	26x30	2.8	1
65012510003501	10	350	Untreated	80	30	35	20	350	14	28x30	3.59	1
65012510003502	10	350	Hot dip galvanized	80	30	35	20	350	14	28x30	3.59	1
65012517004001	17	400	Untreated	100	35	35	25	400	17.5	35x46	6.45	1
65012517004002	17	400	Hot dip galvanized	100	35	35	25	400	17.5	35x46	6.45	1