

## Certlift 8F - Elevator

### Product information



**Typical applications:** For elevators.

**Design:** Ordinary right hand lay.

**Features:** Fibre core as lubrication reservoir, durable, smooth running and robust design.


**Rope construction:** 8x19 Seal + FC.

**Marking:** According to standard


**Finish:** Ungalvanized.

**Standard:** EN 12385-5

**Fill factor:** 0.44

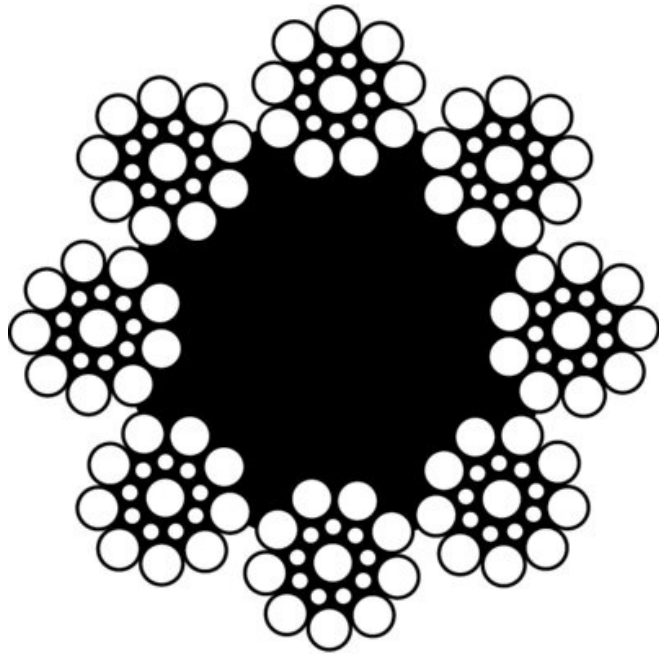

Elevator



Part code	Rope diameter mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay	Min. breaking force kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
106100804130111	8	1,370/1,770	Bright	sZ	28.1	22.3	A-1	21.8
106100904130111	9	1,370/1,770	Bright	sZ	35.6	28.3	A-1	27.5
106101004130111	10	1,370/1,770	Bright	sZ	44	34.9	A-1	34
106101104130111	11	1,370/1,770	Bright	sZ	53.2	42.2	A-1	41.1
106101204130111	12	1,370/1,770	Bright	sZ	66.3	50.3	A-1	49
106101304130111	13	1,370/1,770	Bright	sZ	74.3	59	A-1	57.5
106101404130111	14	1,370/1,770	Bright	sZ	86.2	68.4	A-1	66.6
106101504130111	15	1,370/1,770	Bright	sZ	98.9	78.5	A-1	76.5
106101604130111	16	1,370/1,770	Bright	sZ	113	89.3	A-1	87