


## Cable Laid Grommet

### Product information

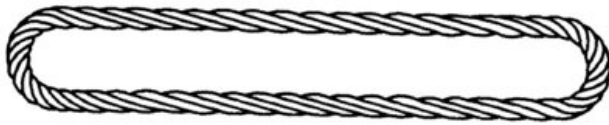

Cable laid grommets can be used in all types of lifting operations. They come in different lengths and designs. This design gives great flexibility.

**Cablelaid grommets:** 7(6x36WS-IWRC)

**Breaking load:** 1960 N/mm<sup>2</sup>.

**Marking:** According to standard

**Finish:** Galvanized

**Standard:** EN 13414-3

Part code	Diameter mm	WLL ton	MBL	Minimum circ. m	Wire Ø mm	Weight kg/m	Delivery time
16210014XXX	9	1.38	7	0.315	3	0.26	10
16210025XXX	12	2.46	13	0.42	4	0.46	10
16210038XXX	15	3.84	19	0.525	5	0.71	10
16210055XXX	18	5.53	28	0.63	6	1.03	10
16210075XXX	21	7.53	38	0.735	7	1.4	10
16210098XXX	24	9.83	49	0.84	8	2.01	10
16210124XXX	27	12.4	62	0.945	9	2.54	10
16210154XXX	30	15.4	77	1.05	10	3.14	10

16210186XXX	33	18.6	93	1.16	11	3.8	10
16210221XXX	36	22.1	110	1.26	12	4.52	10
16210260XXX	39	26	130	1.37	13	5.3	10
16210301XXX	42	30.1	150	1.47	14	6.15	10
16210350XXX	45	35	173	1.58	15	7.06	10
16210393XXX	48	39.3	197	1.68	16	8.03	10
16210498XXX	54	49.8	249	1.89	18	10.2	10
16210555XXX	57	55.5	278	2	19	11.4	10
16210613XXX	60	61.3	308	2.1	20	12.53	10
16210762XXX	66	76.2	382	2.31	22	15.15	10
16210932XXX	72	93.2	443	2.52	24	18.08	10
16211125XXX	78	112.5	520	2.73	26	21.23	10
16211340XXX	84	134	602	2.94	28	24.6	10
16211590XXX	90	159	692	3.15	30	28.2	10
16211865XXX	96	186.5	787	3.36	32	32.1	10
16212170XXX	102	217	889	3.57	34	36.23	10
16212520XXX	108	252	997	3.78	36	40.65	10
16212900XXX	114	290	1,110	3.99	38	45.3	10
16213330XXX	120	333	1,230	4.2	40	50.18	10
16213810XXX	126	381	1,357	4.41	42	55.35	10
16214340XXX	132	434	1,489	4.62	44	60.75	10
16214930XXX	138	493	1,626	4.83	46	64.91	10
16215600XXX	144	560	1,772	5.04	48	73	10

16216340XXX	150	634	1,922	5.25	50	76.69	10
16216920XXX	156	692	2,079	5.46	52	84.75	10
16218030XXX	168	803	2,412	5.88	56	98.25	10
16218610XXX	174	861	2,587	6.09	58	105.75	10
16211049XXX1	192	1,049	3,150	6.72	64	129	10
16211844XXX1	204	1,184	3,556	7.14	68	145	10