


## Electric Wormgear type MCW

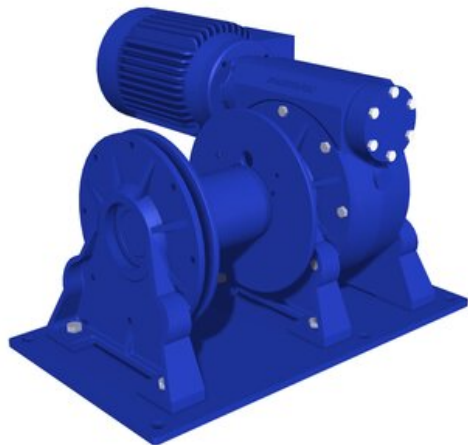

### Product information

## EMCÉ

### WINCHES

A range of electric self-braking wormgear winches developed for heavy duty pulling and traversing duties up to 2,800 kg. Due to the self-braking wormgears the winches are suitable for pulling up a slope. A brake is available as an option for accurate positioning or repetitive lifting applications up to 2,000 kg.

- IP 54 400 VAC / 3 phases / 50 Hz non-braked motor
- Steel drum (not grooved) with cable fixing point at flange
- Single drum support (MCW 250, MCW 500)
- Two drum supports (all other models)
- Double layer 2-component conservation according ISO 12944 category C2-Low, colour RAL 5010
- FEM/ISO Class: T2-L2-M2

#### Options:

- Braked motor (aluminium or cast iron)
- IP 56 TENV cast iron motor for marine applications
- 220 single-phase motors (up to MCW 750)
- 24 VDC motors
- Explosion proof motors
- Protective steel motor cover
- Manual or remotely controlled disengaging clutch
- Band brakes
- Grooved drum - Drum press roller
- Alternative Speeds
- Alternative drum dimensions / split drums/ additional rope anchors / etc.
- Drum Guards
- Emergency Cranking
- Marine / offshore coating systems

#### Control options:

- IP 65 direct pendant remote control with emergency stop (up to 1.5kW 220 V AC / 1 phase or 2.2kW 400 V AC / 3 phase)
- IP 55 control box with low-voltage IP 65 remote control built acc. to NEN 1010
- Load limiter
- Frequency inverter for variable speed control

- wireless radio control systems
- Limit switches
- Slack wire switches

**Features:** Self breaking wormgear transmission

Part code	Code	WLL ton	WLL top layer ton	Recomm. rope dia. mm	Motor kW	WLL Pulling 1st layer kg	WLL Pulling 5th layer kg	Speed 1st layer m/min	Drum capacity 1st layer m	Max. drum capacity m	Delivery time
5406	MCW 250	0.2	0.135	6	0.75	250	170	6	2	19	10
5406	MCW 250 SPH	0.2	0.135	6	0.75	250	170	5	2	19	10
5406	MCW 500 SPH	0.275	0.275	6	1.5	500	340	5	2	19	10
5406	MCW 750 SPH	0.36	0.36	7	1.8	700	460	5	6	42	10
5406	MCW 500	0.4	0.275	6	1.1	500	340	6	2	19	10
5406	MCW 750	0.6	0.39	7	1.5	750	490	6	6	42	10
5406	MCW 1200	0.96	0.6	8	2.2	1,200	750	5	5	38	10
5406	MCW 1700	1.3	0.805	10	4	1,700	1,055	6	6	50	10
5406	MCW 2200	1.7	1.055	12	5.5	2,200	1,365	7	7	63	10
5406	MCW 2800	2	1.245	13	7.5	2,800	1,745	8	8	76	10

## Technical data

**Technical information**

<b>Winch type</b>	<b>Motor power</b>	<b>Motor power</b>
	<b>400v</b>	<b>230 V1 phase</b>
	<b>kW S2</b>	<b>kW S2</b>
MCW 250	0.75	
MCW 500	1.1	
MCW 750	1.5	
MCW 1200	2.2	
MCW 1700	4	
MCW 2200	5.5	
MCW 2800	7.5	
MCW 250 SPH		0.75
MCW 500 SPH		1.5
MCW 750 SPH		1.8