
Lifting Solutions Group
Axel Johnson International

Container Lifting Beam Type C and D

Product information

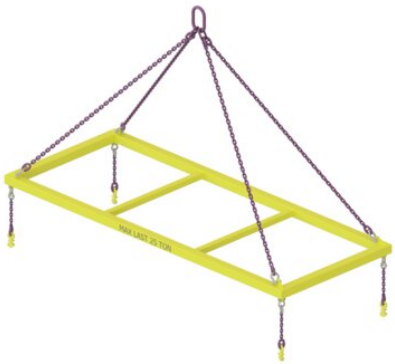

Lifting beam for handling standard 20-ft and 40-ft containers. Supplied complete with wire rope or chain slings, type CLB-32 or CLB-40 container hooks for attachment to container bottom fixings and type CLT for top fixings.

Design: The type C frame beam is designed for lifting from the bottom fixings. The type D frame beam is designed for lifting from the top fixings.

Proof: 2 x WLL according to SS-EN 131 55

Type C Frame beam - bottom lift.
Type D Frame beam - top lift.

... *Read more*

Material: Hollow-beam and plate of high-strength structural steel.
Marking: Maximum load and CE mark.
Finish: Yellow painted.
Note: Manufactured in accordance with the Swedish and international standard SS-ISO 3874, which states that a lifting beam is required when handling loaded standard containers larger than 10 ft in


CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Container Lifting Beam Type C and D

Blueprint



Technical data

Part code	Code	WLL ton	Type	For container size (ft)	B mm	H mm	K mm	L mm	Weight kg
62056692D240	6692D-240	24	1C-1CC	20	2,260	3,600	1,100	5,850	690
62056692C240	6692C-240	24	1C-1CC	20	2,550	3,650	3,400	5,850	720
62056694D360	6694D-360	36	1A-1AAA	40	2,260	6,500	1,300	11,985	2,350
62056694C360	6694C-360	36	1A-1AAA	40	2,550	6,500	3,800	11,985	2,400

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved