


Container Lifting Beam Type C and D



Product information

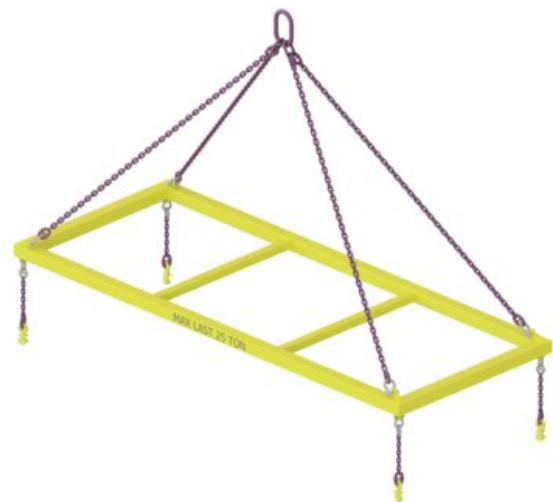

Lifting beam for handling standard 20-ft and 40-ft containers. Supplied complete with wire rope or chain slings, type CLB-32 or CLB-40 container hooks for attachment to container bottom fixings and type CLT for top fixings.

Design: The type C frame beam is designed for lifting from the bottom fixings. The type D frame beam is designed for lifting from the top fixings.

Proof: 2 x WLL according to SS-EN 131 55

Type C Frame beam - bottom lift.

Type D Frame beam - top lift.

Material: Hollow-beam and plate of high-strength structural steel.

Marking: Maximum load and CE mark.

Finish: Yellow painted.

Note: Manufactured in accordance with the Swedish and international standard SS-ISO 3874, which states that a lifting beam is required when handling loaded standard containers larger than 10 ft in

| Part code | Code | WLL ton | Type | For container size (ft) | B, mm | H, mm | K mm | L mm | Weight kg | Delivery time |
|--------------|-----------|---------|---------|-------------------------|-------|-------|-------|--------|-----------|---------------|
| 62056692D240 | 6692D-240 | 24 | 1C-1CC | 20 | 2,260 | 3,600 | 1,100 | 5,850 | 690 | 10 |
| 62056692C240 | 6692C-240 | 24 | 1C-1CC | 20 | 2,550 | 3,650 | 3,400 | 5,850 | 720 | 10 |
| 62056694D360 | 6694D-360 | 36 | 1A-1AAA | 40 | 2,260 | 6,500 | 1,300 | 11,985 | 2,350 | 10 |
| 62056694C360 | 6694C-360 | 36 | 1A-1AAA | 40 | 2,550 | 6,500 | 3,800 | 11,985 | 2,400 | 10 |

Blueprint

