


## Container Lifting Beam Type C and D

### Product information

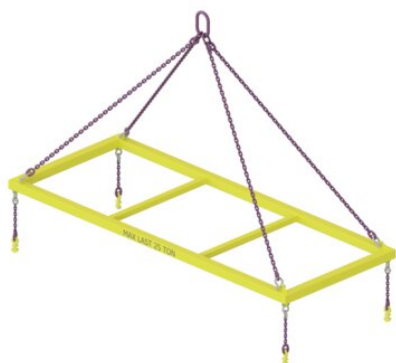

### CERTEX

Lifting beam for handling standard 20-ft and 40-ft containers. Supplied complete with wire rope or chain slings, type CLB-32 or CLB-40 container hooks for attachment to container bottom fixings and type CLT for top fixings.

**Design:** The type C frame beam is designed for lifting from the bottom fixings. The type D frame beam is designed for lifting from the top fixings.

**Proof:** 2 x WLL according to SS-EN 131 55

**Type C** Frame beam - bottom lift.

**Type D** Frame beam - top lift.

... [Read more](#)

**Material:** Hollow-beam and plate of high-strength structural steel.


**Marking:** Maximum load and CE mark.

**Finish:** Yellow painted.

**Note:** Manufactured in accordance with the Swedish and international standard SS-ISO 3874, which states that a lifting beam is required when handling loaded standard containers larger than 10 ft in

## Container Lifting Beam Type C and D

### Blueprint



### Technical data

Part code	Code	WLL ton	Type	For container size (ft)	B mm	H, mm	K mm	L mm	Weight kg
62056692D240	6692D-240	24	1C-1CC	20	2,260	3,600	1,100	5,850	690
62056692C240	6692C-240	24	1C-1CC	20	2,550	3,650	3,400	5,850	720
62056694D360	6694D-360	36	1A-1AAA	40	2,260	6,500	1,300	11,985	2,350
62056694C360	6694C-360	36	1A-1AAA	40	2,550	6,500	3,800	11,985	2,400