

Lifting Beam Type LO

Product information



This type of lifting beam functions primarily as a spreader beam meaning that a 2-part sling must be used between the crane hook and the lifting beam. The lifting beam is designed with 2x3 attachment points, which makes it possible to have several different types of attachments mounted on the lifting beam at the same time. Other lengths and working loads can be manufactured upon request.


Design: Lightweight welded pipe beam construction providing good torsional stiffness.

Proof load: Usually 1,5 x WLL.

Marking: Working load limit (WLL), CE marking, manufacturer, serial number, year of manufacturing, etc.

Finish: Yellow painted. Other treatments available on request.

Note: Top sling, separate slings and other accessories to be ordered separately.

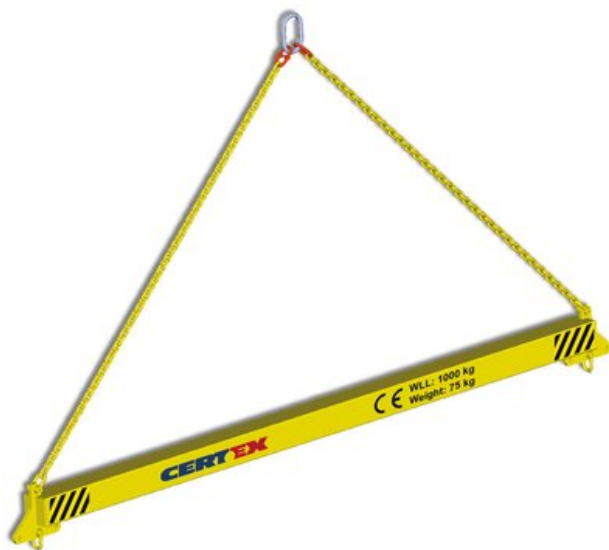

Part code	Code	WLL 90° ton	WLL 120° ton	B mm	L mm	L min. mm mm	L max. mm mm	Weight kg	Delivery time
6205630051500	LO-0,5/1,5	0.5	0.3	50	1,500	1,300	1,700	12	35
6205630052000	LO-0,5/2	0.5	0.3	50	2,000	1,800	2,200	14	35
6205630052500	LO-0,5/2,5	0.5	0.3	50	2,500	2,300	2,700	16	35
6205630053000	LO-0,5/3	0.5	0.3	50	3,000	2,800	3,200	19	35
6205630101500	LO-1/1,5	1	0.7	70	1,500	1,300	1,700	20	35
6205630053500	LO-0,5/3,5	0.5	0.3	50	3,500	3,300	3,700	21	35
6205630102000	LO-1/2	1	0.7	70	2,000	1,800	2,200	24	35
6205630102500	LO-1/2,5	1	0.7	70	2,500	2,300	2,700	28	35

6205630201500	LO-2/1,5	2	1.2	90	1,500	1,300	1,700	31	35
6205630103000	LO-1/3	1	0.7	70	3,000	2,800	3,200	32	35
6205630103500	LO-1/3,5	1	0.7	70	3,500	3,300	3,700	36	35
6205630202000	LO-2/2	2	1.2	90	2,000	1,800	2,200	37	35
6205630054000	LO-0,5/4	0.5	0.3	70	4,000	3,800	4,200	40	35
6205630202500	LO-2/2,5	2	1.2	90	2,500	2,300	2,700	43	35
6205630055000	LO-0,5/5	0.5	0.3	70	5,000	4,800	5,200	48	35
6205630203000	LO-2/3	2	1.2	90	3,000	2,800	3,200	49	35
6205630302000	LO-3/2	3	2	120	2,000	1,800	2,200	52	35
6205630203500	LO-2/3,5	2	1.2	90	3,500	3,300	3,700	55	35
6205630056000	LO-0,5/6	0.5	0.3	70	6,000	5,800	6,200	56	35
6205630104000	LO-1/4	1	0.7	90	4,000	3,800	4,200	61	35
6205630502000	LO-5/2	5	3	120	2,000	1,800	2,200	68	35
6205630303000	LO-3/3	3	2	120	3,000	2,800	3,200	69	35
6205630105000	LO-1/5	1	0.7	90	5,000	4,800	5,200	73	35
6205630802000	LO-8/2	8	5	140	2,000	1,800	2,200	83	35
6205630106000	LO-1/6	1	0.7	90	6,000	5,800	6,200	85	35
6205630204000	LO-2/4	2	1.2	90	4,000	3,800	4,200	87	35
6205630304000	LO-3/4	3	2	120	4,000	3,800	4,200	87	35
6205630503000	LO-5/3	5	3	120	3,000	2,800	3,200	89	35
6205631002000	LO-10/2	10	6	140	2,000	1,800	2,200	99	35
6205630205000	LO-2/5	2	1.2	100	5,000	4,800	5,200	105	35
6205630803000	LO-8/3	8	5	140	3,000	2,800	3,200	105	35

6205630504000	LO-5/4	5	3	120	4,000	3,800	4,200	110	35
6205630206000	LO-2/6	2	1.2	100	6,000	5,800	6,200	123	35
6205631003000	LO-10/3	10	6	150	3,000	2,800	3,200	123	35
6205630804000	LO-8/4	8	5	140	4,000	3,800	4,200	128	35
6205630305000	LO-3/5	3	2	140	5,000	4,800	5,200	131	35
6205631004000	LO-10/4	10	6	150	4,000	3,800	4,200	147	35
6205630505000	LO-5/5	5	3	120	5,000	4,800	5,200	151	35
6205630306000	LO-3/6	3	2	140	6,000	5,800	6,200	152	35
6205630805000	LO-8/5	8	5	140	5,000	4,800	5,200	171	35
6205630506000	LO-5/6	5	3	120	6,000	5,800	6,200	173	35
6205630806000	LO-8/6	8	5	140	6,000	5,800	6,200	195	35
6205631604000	LO-16/4	16	10	200	4,000	3,800	4,200	205	35
6205631005000	LO-10/5	10	6	150	5,000	4,800	5,200	206	35
6205631605000	LO-16/5	16	10	200	5,000	4,800	5,200	226	35
6205631006000	LO-10/6	10	6	150	6,000	5,800	6,200	233	35
6205631606000	LO-16/6	16	10	200	6,000	5,800	6,200	256	35

Blueprint

