


## Anchor Starcon Load Group 20 t

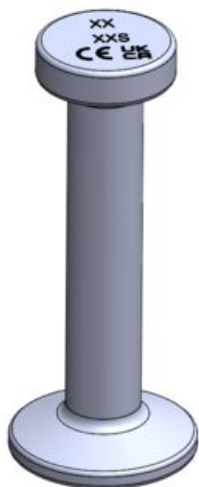

### Product information

The Starcon spherical head anchor load group 20 t is a steel component made for concrete casting. The foot of the anchor is constructed especially for strong concrete anchorage.

The cylindrical head of the Starcon spherical anchor is attached to a Stardon Lifting eye, standard coupling lifting eye for lifting.

Starcon refers to the guidelines in VDI/BV-BS 6205 and DS/CEN/TR 15728.

**Marking:** CE-marked, UKCA-marked, Batch code, Load group+S (Starcon)

**Finish:** Untreated, hot dip galvanized or stainless

**Note:** The delivery time for the individual products is estimated. If the desired quantity is not in stock, please contact CERTEX Danmark A/S [Starcon](#) for information on the applicable delivery time.

Other lengths can be supplied on request.

Part Code	Load grp.	Length mm	Finish	D mm	D1 mm	D2 mm	L mm	Weight kg	Delivery time
65011020002501	20.0t	250	Untreated	39	70	98	250	3.3	2
65011020002502	20.0t	250	HDG	39	70	98	250	3.3	100
65011020003401	20.0t	340	Untreated	39	70	98	340	4.38	100
65011020003402	20.0t	340	HDG	39	70	98	340	4.38	100
65011020005001	20.0t	500	Untreated	39	70	98	500	5.87	2
65011020005002	20.0t	500	HDG	39	70	98	500	5.87	2
65011020010001	20.0t	1,000	Untreated	39	70	98	1,000	11.75	2
65011020010002	20.0t	1,000	HDG	39	70	98	1,000	11.75	100

Blueprint

