


## Selantic Sling

### Product information

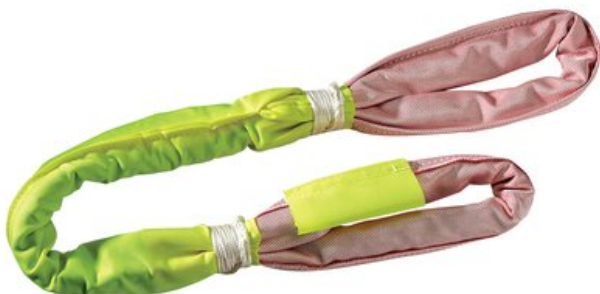

Sling designed especially for heavy on- and offshore lifting, subsea installation, mooring, tethering or project-specific lifting.

**Jacket:** Cordura® cut resistant cover, and special design wear protection in critical areas.

**Capacity:** 1 to >2000 Te MBL.

**Length:** 0,8 to 150 m.

**Length tolerance:**  $\pm 0,15\%$  of nominal length.

**Certifications:** DNV, CEN and ILO.

#### Features

- Lightweight and flexible
- Safe and easy to handle
- No damage to painted surfaces
- Durable construction
- Heat resistant and non conductive
- Available with fluorescent jacket for subsea applications
- Design optimization through material selection

**Rope construction:** Parallel laid endless filaments.

**Material:** Aramid, HMPE, LCP or blends.

**Safety factor:** 7:1

Diameter mm	WLL ton	MBL ton	Delivery time
35	5	35	10
45	10	70	10
55	15	105	10
65	20	140	10
70	25	175	10
75	30	210	10
90	40	280	10
100	50	350	10
113	60	420	10
140	80	560	10
155	90	630	10
165	100	700	10
180	115	800	10
200	130	900	10
210	143	1,000	10