CERTEX | Lifting Solutions Group
Axel Johnson International

Selantic Sling

Product information

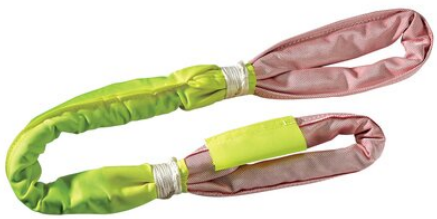

Sling designed especially for heavy on- and offshore lifting, subsea installation, mooring, tethering or project-specific lifting.

Jacket: Cordura® cut resistant cover, and special design wear protection in critical areas.
Capacity: 1 to >2000 Te MBL.
Length: 0,8 to 150 m.
Length tolerance: ±0,15% of nominal length.
Certifications: DNV, CEN and ILO.

Features
- Lightweight and flexible
- Safe and easy to handle
- No damage to painted surfaces
- Durable construction
- Heat resistant and non conductive
- Available with fluorescent jacket for subsea applications
- Design optimization through material selection

... *Read more*

Rope construction: Parallel laid endless filaments.
Material: Aramid, HMPE, LCP or blends.

Safety factor: 7:1

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Selantic Sling

Technical data

Diameter mm	WLL ton	MBL ton
35	5	35
45	10	70
55	15	105
65	20	140
70	25	175
75	30	210
90	40	280
100	50	350
113	60	420
140	80	560
155	90	630
165	100	700
180	115	800
200	130	900
210	143	1,000

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved