


## Special Master Link Assembly Pewag VAWI Stainless

### Product information

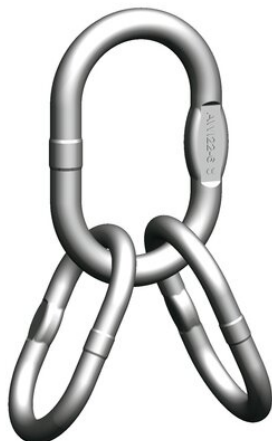

With its flattened transition links, this stainless steel master link assembly for wire ropes opens up universal connection possibilities. If safety is your primary concern, you can't go wrong with this IV-leg master link assembly with extra-large transition links to create III- and IV-leg wire rope slings in the welded or assembled system. The assembly is wide enough to fit two rope thimbles per transition link and is electrically welded and stamped for an extra-clean finish.

The manufacturing process of this corrosion-resistant, grade 6 master link assembly is similar to DIN 5688-1 and DIN 3088-1989. It is tested to 100 % of its maximum load capacity.

Preferred areas of application for the VAWI IV-leg master link assembly G6 are water and wastewater applications and the product can also be used in connection with chemicals and food products; however, restrictions will apply and we recommend that you contact the manufacturer for advice prior to exposing the product to such use.

[... Read more](#)

**Material:** 1.4571 (AISI 316Ti) og 1.4404 (AISI 316L).

**Marking:** CE-marked


**Finish:** Pickled and blasted.

**Safety factor:** 4:1

**Grade:** 6

## Special Master Link Assembly Pewag VAWI Stainless

### Blueprint



### Technical data

| Part code    | Code       | WLL  | Usable with sling hooks<br>up to DIN 15401 No. | Double hook DIN 15402 no. | d mm | d1 mm | e mm | t mm | t1 mm | w mm | w1 mm | Weight<br>kg |
|--------------|------------|------|--|---------------------------|------|-------|------|------|-------|------|-------|--------------|
| 400100190030 | VAWI 6-6   | 1.85 | 2,5  | 4                         | 16   | 13    | 220  | 110  | 110   | 60   | 60    | 1.21         |
| 400100340030 | VAWI 7/8-6 | 3.35 | 5  | 6                         | 18   | 16    | 245  | 135  | 110   | 75   | 60    | 1.98         |
| 400100530030 | VAWI 10-6  | 5.25 | 6  | 8                         | 23   | 23    | 320  | 160  | 160   | 90   | 90    | 4.8          |
| 400100890030 | VAWI 13-6  | 8.9  | 8  | 10                        | 27   | 27    | 360  | 180  | 180   | 100  | 100   | 7.38         |
| 400101320030 | VAWI 16-6  | 13.2 | 10   | 12                        | 32   | 32    | 400  | 200  | 200   | 110  | 110   | 12.42        |