
Master Link Assembly Pewag VSAW 1

Product information

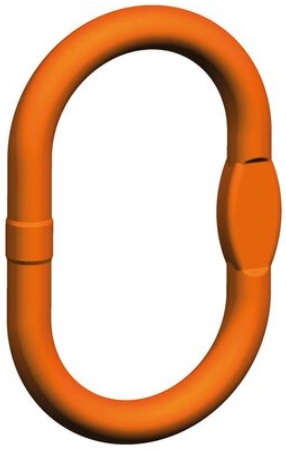

VSAW is designed for assembling of welded chain slings with transition links BW by pewag. For assembling of chain slings with Connex CW.

Extra-large internal ring dimensions that are suitable for single hooks according to DIN 15401 no. 50/100 or for double hooks according to DIN 15402 no. 63/125 are yet another outstanding feature of these products.

... *Read more*

Material: High duty grade 10.
Marking: According to standard, CE-mark, Pewag or PW, winner or 10, H16, batch code and type.
Temperature range: -40ºC up to +380°C.
Finish: Orange powder coated.
Standard: EN 1677-4

Safety factor: 4:1
Grade: 10


CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Master Link Assembly Pewag VSAW 1

Blueprint



Technical data

Part code	Code	WLL ton	EWL mm	Consisting of	Double hook DIN 15402 no.	Can be used up to single hook acc. to DIN 15401 no.	d mm	e mm	s mm	t mm	w mm mm	Weight kg
402101600360	VSAW 1-19	16	460	SAW 40	63	50	40	460	32	460	250	13.12
402102240360	VSAW 1-22	22.4	500	SAW 45	63	50	45	500	-	500	250	17.8
402104000361	VSAW 1-32 320	40	800	SAW 60	125	100	60	800	54	800	320	48

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved