
Lifting Solutions Group
Axel Johnson International

# Transport Anchor with Cross-pin Starcon

## Product information

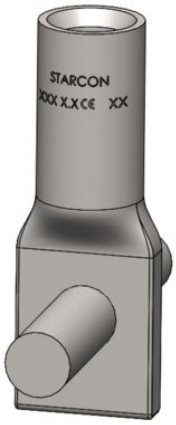


The Starcon crossbar transport anchor is designed with an internal thread for transporting and fastening concrete elements. The transport with cross-pin can be used to lift and secure wall or tunnel elements and can be attached directly to the reinforcement mesh in precast concrete elements.

The cross-hole transport anchor is available with a metric thread, which makes it easy to attach wire rope straps and threaded lifting equipment by screwing these onto the transport anchor. The cylindrical internal thread assembly enables a reliable connection to the wire rope strap, ensuring an efficient and safe lifting operation.

**Areas of application:** Concrete elements, beams or columns.
**Advantages:** Low dead weight
Quick on and off lifting equipment
**Load group:** 0.5t – 2.5t
**Technical information:** CE marking according to MD 2006/42 EF
Starcon product is designed according to EN13155-2009 and follows the guidelines of VDI/BV-BS 6205 and DS/CEN/TR 15728.
**EPD:** Our Environmental Product Declarations (EPDs) are available in the LCA NO calculator/software. These EPDs have been prepared in strict accordance with ISO 14025 and EN 15804 standards.

**Download the EPDs from the LCA database:**
Untreated Products: Starcon Lifting and Handling Systems for Concrete elements - Untreated - EPD Norge
Surface treated Products: Starcon Lifting and Handling Systems for Concrete elements - Surface Treated. - EPD Norge

... *Read more*

**Marking:** CE-marked, Thread size, batch code, load group + S(Starcon)
**Finish:** Electro-galvanized - Corrosion class C3 - ISO 12944-2.

**Note:** The delivery time for the individual products is estimated and if the desired quantity is not in stock, please contact CERTEX Danmark A/S – Starcon for information on the applicable delivery time.


**CERTEX Danmark A/S**
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

# Transport Anchor with Cross-pin Starcon

## Blueprint




## Technical data

| Part code | Thread mm | Load grp. t | Length mm | M mm | L mm | D mm | E mm | Ø mm mm | L1 mm | F mm | Weight kg | Packing Qty. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 650535NK3012ZNP | M12 | 0.5 | 60 | M12 | 60 | 15 | 25 | 10 | 60 | 13 | 0.072 | 250 |
| 650535NK3016ZNP | M16 | 1.2 | 79 | M16 | 79 | 21 | 32 | 12 | 80 | 20 | 0.172 | 100 |
| 650535NK3016100ZNP | M16 | 1.2 | 100 | M16 | 100 | 21 | 45 | 12 | 100 | 20 | 0.232 | 60 |
| 650535NK3020ZNP | M20 | 2 | 99 | M20 | 99 | 27.2 | 37 | 14 | 100 | 24 | 0.36 | 60 |
| 650535NK3020120ZNP | M20 | 2 | 120 | M20 | 120 | 27.2 | 45 | 14 | 100 | 24 | 0.392 | 40 |
| 650535NK3024ZNP | M24 | 2.5 | 110 | M24 | 110 | 31 | 40 | 14 | 100 | 24 | 0.43 | 40 |

**CERTEX Danmark A/S**
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved