Lifting Solutions Group
Axel Johnson International

Portable Davit Crane 5PF5

Product information



225 kg capacity portable Davit Crane

- Load ratings up to 385 kg
- Portable, heaviest part 13,2 kg
- Rugged and affordable
- Manual or power winch operation (E2)
- 360° rotation
- Boom adjustable in three positions
- Easy, No-Tools Assembly/Disassembly (all individual components less than 13,5 kg)
- Variety of bases
- 2-Year warranty
- Proof of load 125% of WLL (Optional)

Machinery directive: 2006/42/EC as amended by Directive 95/16/EC.

... *Read more*

Marking: CE-mark
Finish: Powder coat
Note: Five corrosion-resistant surfaces (powder coating (5PT20), galvanized (5PT20G), stainless 304 (S) and 316 (S316) and three layers of epoxy)


CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Portable Davit Crane 5PF5

Blueprint

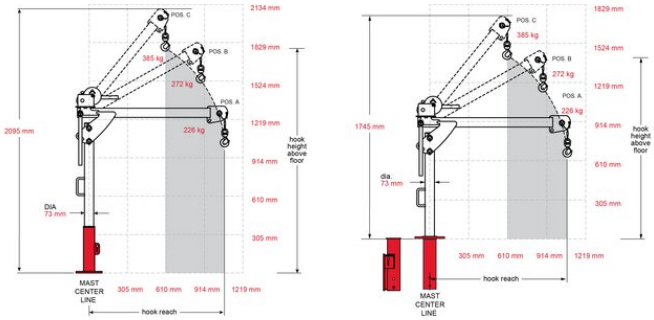

Technical data

Part code	Code	WLL ton	Weight kg
60115PF5M1	5PF5-M1	0.225	34.5
60115PF5GM1	5PF5G-M1	0.225	34.5
60115PF5E2	5PF5-E2	0.225	65.5
60115PF5SM3	5PF5S-M3	0.385	38
60115PF5M2	5PF5-M2	0.385	46
60115PF5GM2	5PF5G-M2	0.385	46

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Portable Davit Crane 5PF5

First Mate, 5PF5, with Pedestal Base

Boom Position	Load Rating (KG)	Hook Reach (mm)	Hook height (mm)*
A	225	1066	1016
B	225	889	1524
C	225	609	1778

* Optional Base extension can provide 380mm more hook height

First Mate, 5PF5 with Flush or Wall base

Boom Position	Load Rating (KG)	Hook Reach (mm)	Hook height (mm)*
A	225	1066	660
B	225	889	1168
C	225	609	1422

* Optional Base extension can provide 380mm more hook height

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved