
CERTEX | Lifting Solutions Group
Axel Johnson International

Spiral Strand 1x19 Stainless

Product information

S Z SS

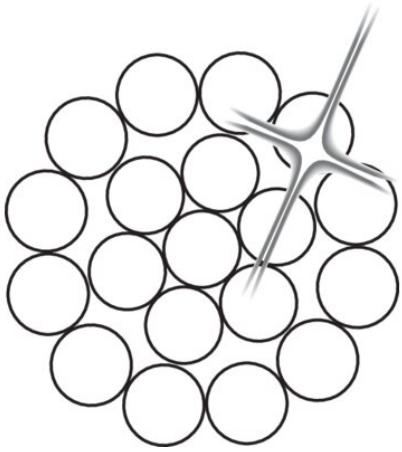

Stay rope



Typical applications: Wire rope for rigging, stays and controls.
Design: Right- or left-handed.

... *Read more*

Rope construction: 1x19
Material: AISI 316
Marking: According to standard
Standard: EN 12385-10
except material

Fill factor: 0.76

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Spiral Strand 1x19 Stainless

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Lubrication	Weight kg/100m
108100801620078	8	1,570	Stainless	S	52.8	No-Lube	31.7
108101001620078	10	1,570	Stainless	S	82.5	No-Lube	49.5
108101201620078	12	1,570	Stainless	S	119	No-Lube	71.3
108101402620078	14	1,570	Stainless	Z	162	No-Lube	95.1
108101602620078	16	1,570	Stainless	Z	211	No-Lube	124

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved