


Man riding Basket BK-500 / BK-1000 / BK-1000E

Product information

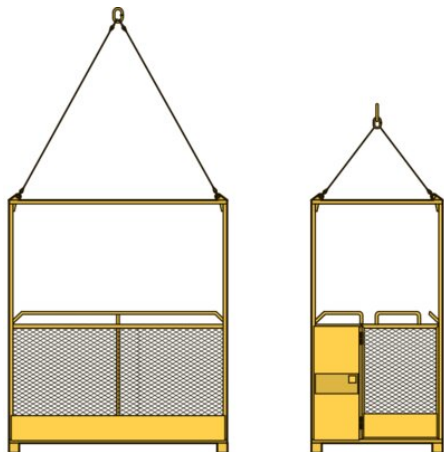

CERTEX

Man riding baskets can be used quickly and safely for temporary working at heights. Our man riding baskets are designed to be hung from a crane hook.

Design: Welded frame in hollow beam with the bottom and sides covered in expanded-metal mesh. Personal items of safety equipment can be attached to the inside handrail. The basket is supported underneath for easy handling by truck or forklift. A gate is provided on one of the short sides (see the respective model). The basket is supplied complete with a four leg wire rope sling and a masterlink.

BK-500: Supplied with inward-opening latching gate.

BK-1000: Supplied with inward-opening latching gate.

BK-1000E (Emergency): Identical to the BK-500 / BK-1000 above except that in an emergency the entire end gate can be opened outwards to provide access, e.g. for a stretcher and medical equipment to be taken on board.

Proof: First inspection by accredited third party authority including certificate [... Read more](#)

Material: Hollow-beam and plate of high-strength structural steel.


Marking: Sign according to standard for inspection mark.

Finish: Yellow painted.

Note: Before use basket and crane has to be initially inspected together. The basket is supplied as standard with wire rope sling. Can alternatively be delivered with chainsling. Wire sling suspension (W), chain suspension (K).

Man riding Basket BK-500 / BK-1000 / BK-1000E

Blueprint



Technical data

Part code	Code	WLL ton	Basket weight kg	Max. number of persons	A mm	B mm	E mm	H mm	L mm	Weight kg
6211BK500W	BK-500	0.5	220	2	1,240	1,000	600	2,000	3,100	720
6211BK1000W	BK-1000	1	350	4	2,000	1,200	700	2,100	4,470	1,350
6211BK1000EW	BK-1000E	1	400	4	2,300	1,200	700	2,100	4,700	1,400