
Fork Hook Pewag GHW

Product information

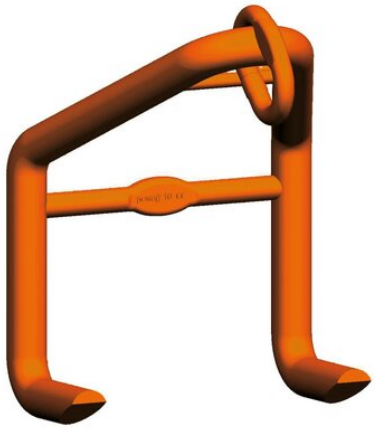

GHW Fork hooks are designed for the assembling of chain slings. They serve for lifting and transporting sheet, metal stacks, boards and frames.
For lifting large sheet metal stacks and boards. Use only in pairs.
Recommended angle of inclination of the sling: β 30-45°.

... *Read more*

Material: High duty grade 10.
Marking: According to standard, CE-mark, Pewag or PW, winner or 10, H16, batch code and type.
Temperature range: -40ºC up to +380°C.
Finish: Orange powder coated.
Standard: EN 1677-1

Safety factor: 4:1
Grade: 10


CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Fork Hook Pewag GHW

Blueprint



Technical data

Part code	Code	WLL ton	EWL mm	b mm	d mm	e mm	g mm	s mm	BW-link mm	Weight kg
402300140590	GHW 5/6	1.4	203	190	23	203	65	100	BW 13	2.84
402300250590	GHW 7/8	2.5	300	254	30	300	100	150	BW 16	7.25
402300400590	GHW 10	4	402	380	40	402	130	200	BW 22	16

CERTEX Danmark A/S
info@certex.dk
+45 74 54 14 37
© November 2026 - All Rights Reserved